

C.A.C. Installation

For 6.0L

-- Installat<u>ion Inst</u>ructions --

6.0L 1042710

PLEASE READ ALL INSTRUCTIONS BEFORE INSTALLATION




Kit Contents

| 1402700 | 1407003 | 1405211 |
|-------------------|----------------------|--------------|
| | | |
| Charge Air Cooler | Straight Ribbed Boot | 3.25" Clamps |
| Qty: 1 | Qty: 1 | Qty: 4 |


| 1407030 | 1407008 | 1401579P |
|--------------|------------------|---------------------------|
| | | |
| 3.50" Clamps | Step Ribbed Boot | Powder Coated Intake Pipe |
| Qty: 2 | Qty: 2 | Qty: 1 |

Procedure

1. Remove the air intake box by loosening the gear clamp (8mm head) and unplugging the Mass Air Flow sensor and filter minder.

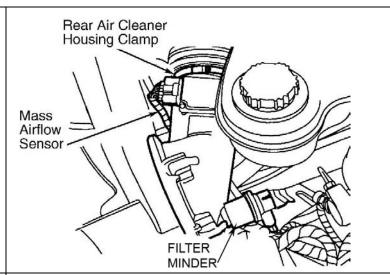

2. Next loosen the boot clamps(11mm head) and remove the stock Charge Air Cooler tubes



3. Disassemble the rubber radiator shielding by popping out the push pins.

IMPORTANT: Ensure the positive battery cable is out of the way.



4. Mark the hood latch position with a felt or paint pen.



5. After you have marked the hood latch you can now remove the top radiator mount brackets, A/C condenser brackets and hood latch.



6. Locate and remove the C.A.C. bolts for the top radiator support. (10mm head)



7. Lift out the top radiator support by removing 8 (13mm head) ensuring all mounting hardware has been removed.

NOTE: The radiator support may be removed easier by lifting up and out at one end.



8. Move A/C condenser and lines to the passenger side to gain clearance to remove the C.A.C.



9. Switch over the top and side rubber mounting isolators from the old cooler to the BD Charge Air Cooler (1402700).




10. When positioning the new Charge Air Cooler into position move the A/C condenser and lines to the passenger side to gain clearance while seating the side isolators firmly in place.




11. Reinstall the top radiator support and continue to reconnect the C.A.C. mounting bolts, top radiator mounting brackets, A/C condenser brackets and hood latch.



12. Mount the (1407008) 3-3 1/4" step ribbed boots on the BD intercooler and tighten the (1407030) 3 1/2" clamps until the spring is bound. (1/2" head)

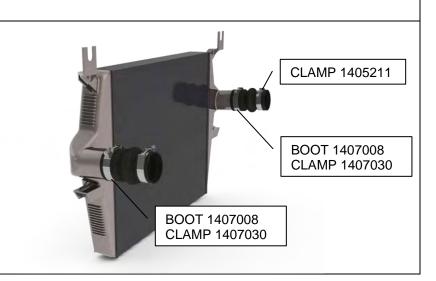

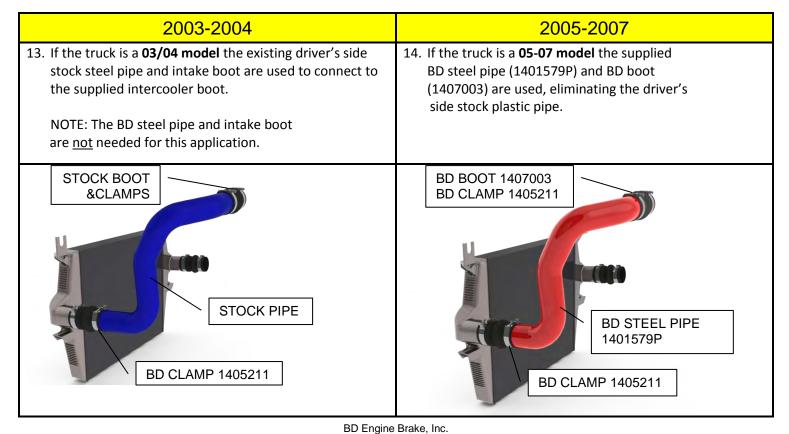

15. Reconnect the passenger side C.A.C. tube with the stock clamp and the supplied BD clamp (1405211) and tighten until the spring is bound. Also reconnect the air intake and all sensors.

Reinstall the battery cables (positive lead first then the negative lead) and the rubber cover to complete the installation.



BOOT CONNECTIONS

