

# IMPORTANT


## Dodge Trucks

When converting 1988-93 diesel trucks from the OEM 13" clutch to Centerforce® P/N DF989966 or 315989966, use the supplied pressure plate mounting hardware.

On 1994-04, diesel trucks reuse the stock pressure plate bolts.

**Note:** 5.9L/6.7L Cummins Turbo diesel & 8.0L gas trucks. When servicing the release fork, be sure to install the clutch release fork properly. To ensure proper installation, the clutch fork production part number should be near the pivot ball ( see diagram ).

Failure to properly install the clutch release fork may cause a growling sound coming through the clutch pedal when depressed.

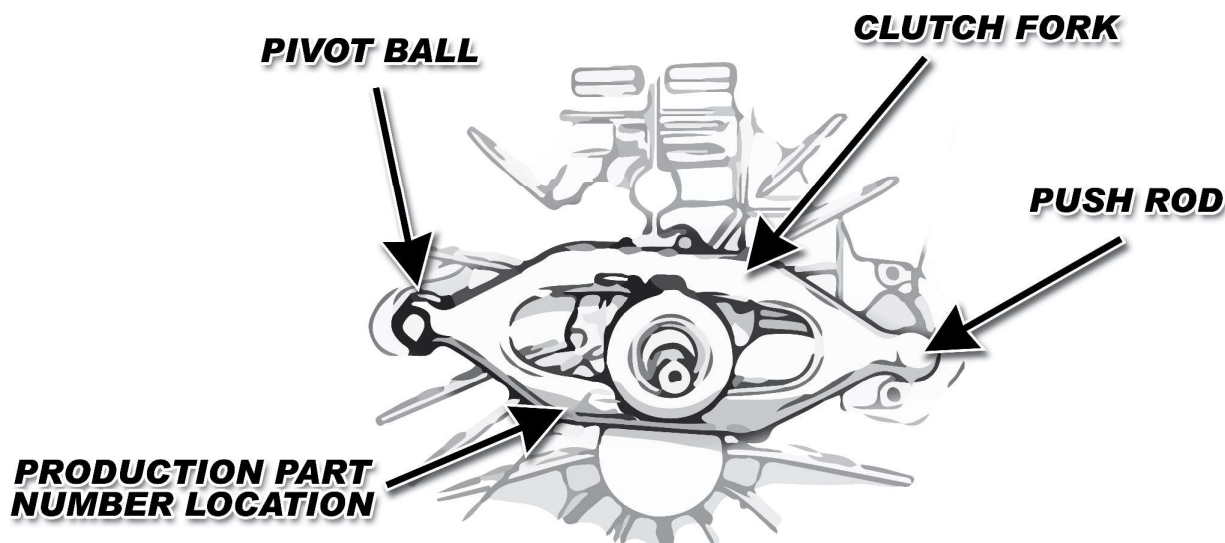

**"NOTE"** Centerforce tip sheets are for general reference only. Please refer to your owners manual for vehicle specifications.

# IMPORTANT