

INSTALLATION INSTRUCTIONS

MASTER DISCONNECT SWITCH – Mr. Gasket Part No. 6276

READ ALL INSTRUCTIONS CAREFULLY BEFORE BEGINNING INSTALLATION.

GENERAL INFORMATION

The Mr. Gasket Master Disconnect Switch has a continuous rating of 20 AMPs at 12 Volts with a momentary rating of 125 AMPs at 12 Volts.

INSTALLATION PROCEDURE

Step 1

Disconnect battery.

Step 2

Determine negative cable.

Step 3

Choose suitable mounting position for switch.

Step 4

For trunk mounted battery installations, use Mr. Gasket Battery Installation Kit Part No. 6279. If battery cable is needed, use Mr. Gasket Battery Cable Kit Part No. 6278. Both kits have cable terminal ends needed to complete shut-off switch installation.

Step 5

Install switch. Refer to wiring diagram below for desired wire installation. On cars equipped with a body ground wire (example: Late GM or Chrysler), failure to route this wire through the shut-off switch will result in a melted body ground strap when the starter is engaged. **NOTE: Do not attach positive and negative cables to shut-off switch at the same time. BATTERY EXPLOSION MAY RESULT.**



Step 6

Reconnect battery and check for correct operation. **NOTE: BE sure ignition switch is in OFF position before turning shut-off switch to OFF position to eliminate voltage spikes that could damage ignition components.**

QUESTIONS

Please call our Tech Support line at 1-216-688-8300, M – F, 9 – 5 EST. Please have the part number on hand when you call.

WIRING DIAGRAM

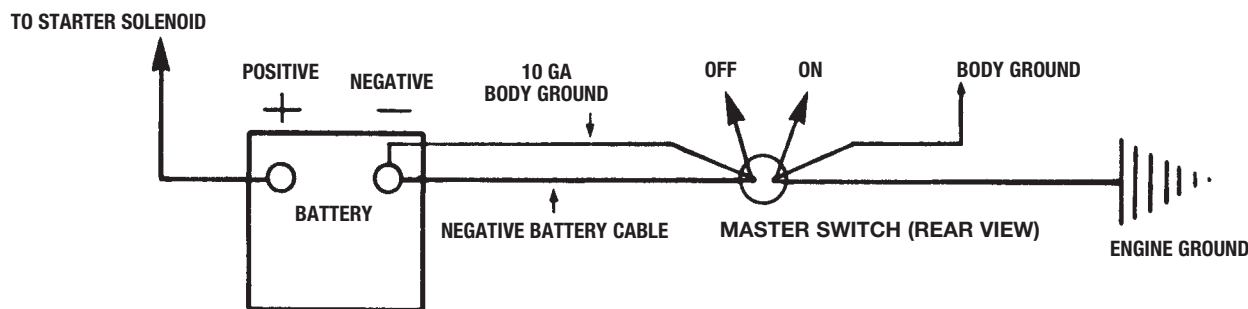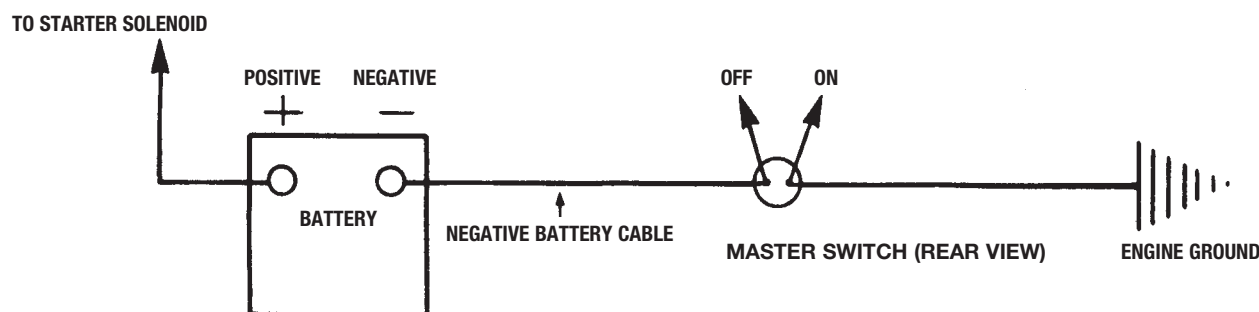

INSTRUCCIONES DE INSTALACIÓN

INTERRUPTOR DE DESCONEXIÓN PRINCIPAL – Mr. Gasket pieza N.º 6276

ANTES DE COMENZAR LA INSTALACIÓN, LEA TODAS LAS INSTRUCCIONES CUIDADOSAMENTE.

INFORMACIÓN GENERAL

El Interruptor de desconexión principal Mr. Gasket tiene una capacidad continua de 20 amperios a 12 voltios con capacidad momentánea de 125 amperios a 12 voltios.

PROCEDIMIENTO DE INSTALACIÓN

Paso 1

Desconecte la batería.

Paso 2

Determine cuál es el cable negativo.

Paso 3

Elija una posición adecuada de montaje para el interruptor.

Paso 4

Para la instalación de baterías montadas en el maletero, utilice el juego de instalación de batería Mr. Gasket N.º 6279. Si se requiere el cable de la batería, utilice el juego de cable para batería Mr. Gasket N.º 6278. Ambos juegos contienen las terminaciones de cable necesarias para terminar la instalación del interruptor de desconexión.

Paso 5

Instale el interruptor. Refiérase a la diagrama de cablea-

do a continuación para la instalación del cable deseada. En los vehículos equipados con cable de conexión a tierra en el chasis (ejemplo: GM recientes o Chrysler), no hacer pasar este cable a través del interruptor de apagado hará que la correa de conexión a tierra en el chasis se derrita cuando se conecte el arranque. **NOTA: no conecte el cable positivo y el negativo al interruptor de desconexión al mismo tiempo. PODRÍA EXPLOTAR LA BATERÍA.**

Paso 6

Vuelva a conectar la batería y verifique el funcionamiento correcto. **NOTA: ASEGÚRESE de que el interruptor de encendido esté en la posición OFF (apagado) antes de poner el interruptor de desconexión en posición OFF para eliminar picos de voltaje que podrían dañar los componentes de encendido.**

PREGUNTAS

Llame a nuestra línea de Soporte Técnico al +1-216-688-8300, de lunes a viernes, de 9 a.m. a 5 p.m., hora oficial del este de EE.UU. Tenga a mano el número de pieza cuando llame.

DIAGRAMA DEL CABLEADO

