



**Installation Instructions
Powersports Division**

For aries AE1 P/N:

- 81-10025
- 81-10052
- 87-10025
- 87-10052

(photos shown are for CRF-X model; CRF-R and KXF models differ only in filter access location)

- Parts list
- replacement air filter
 - filter top
 - foam gasket
 - wing bolt
 - rubber sealing washer



Step 1



Remove seat/open airbox cover and remove foam air filter. Thoroughly clean sealing surface with parts cleaner and/or rubbing alcohol. Remove paper backing from foam gasket. Carefully adhere foam gasket to sealing surface of the air box. Press firmly into place.

Step 3




Hold the filter in place and position the plastic filter top over the filter. Insert the bolt and washer into the hole in the filter top and tighten until snug. Do not over-tighten.

Step 2



Place only the filter into the airbox and position around the mounting ring.

Step 4

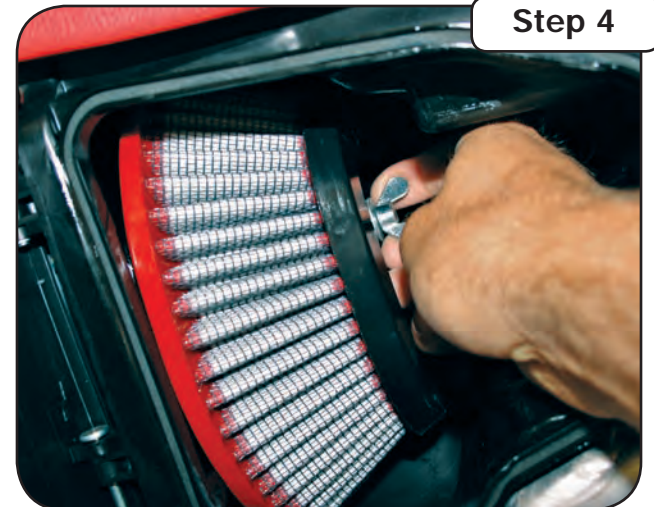

The installation of your aries AE1 filter is now complete. Replace the seat and go ride! We recommend you clean your aries AE1 filter every 2 to 4 rides