
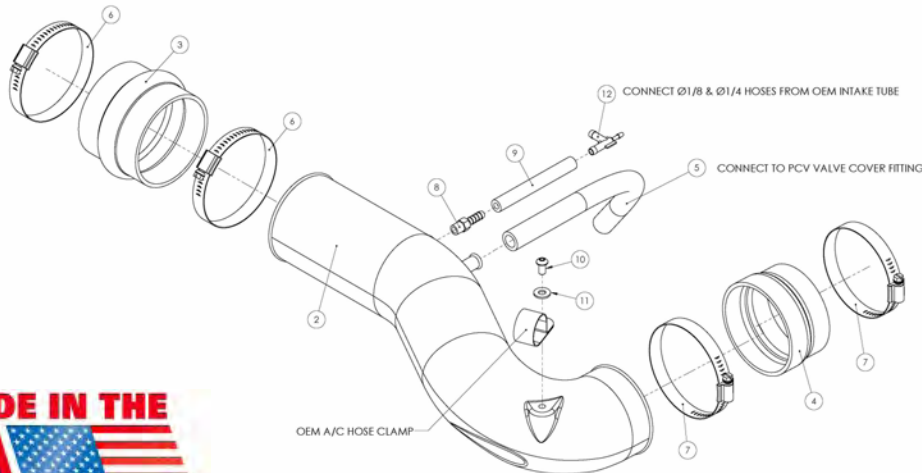


AIR AID®

INTAKE SYSTEMS

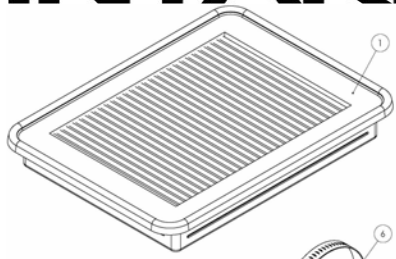

Installation Instructions

Part Number 511-781 Jr. Kit

2005-06 Toyota Tundra / Sequoia

4.7L V-8

Packing List:


#1	851-144	Airaid Premium Filter	1
#2	KIT981T	Modular Intake Tube	1
#3	KITHUMPS03	Urethane Hump Hose	1
#4	KITRDCR04	Reducer Coupler	1
#5	KITHOSE01	1/2" x 13" Breather Hose	1
	KIT781HP	Hardware & Instructions	1
#6	KITHS60	#60 Hose Clamp	2
#7	KITHS52	#52 Hose Clamp	2
#8	KITFITTING10	1/4" Barb x 1/8" NPT Fitting	1
#9	KITHOSE03	1/4" x 4" Hose	1
#10	KIT15DHC3050	1/4 - 20 x 1/2" Button Head Bolt	1
#11	KIT09FWZ019	1/4" Flat Washer	1
#12	KITFITTING11	1/4" x 1/4" x 1/8" Vacuum Tee	1

Tools Required For Installation:

5/32" Allen Wrench
 5/16" & 10mm Socket
 Ratchet & Extension
 7/16" Wrench



1. Disconnect negative battery cable.
 A) Using a 10mm socket, remove the two 10mm nuts, and remove the beauty cover. (Save for reuse). B) Remove the bolt thru the Adel clamp that holds the air conditioning hose.

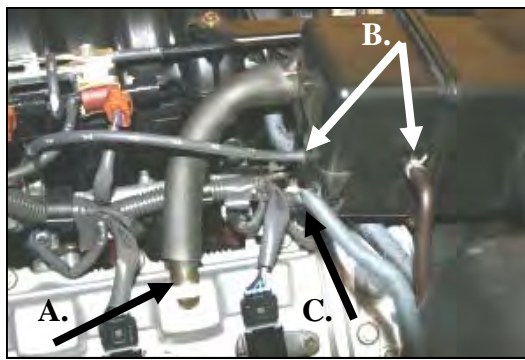


2. A) Disconnect the breather hose at the valve cover. B) Disconnect the 1/8" and 1/4" vacuum lines on the back of the factory intake tube. C) Unclip the wiring harness retainer from the back of the intake tube.



3. Loosen the hose clamps on the intake tube at the throttle body, and at the airbox.



4. Remove the factory intake tube from the vehicle.

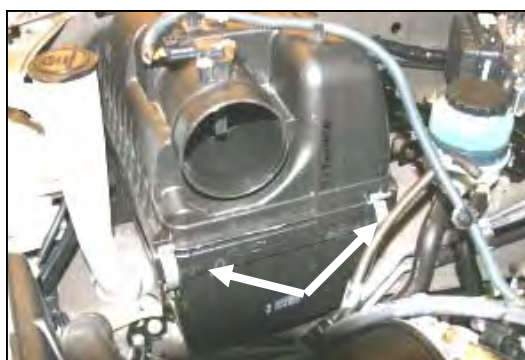

5. Unlatch the 4 clips on the factory airbox, and remove the lid.



6. Remove the factory air filter, and install the Airaid Premium Filter (#1). Reinstall the factory airbox lid, and relatch the 4 clips.




7. Install the urethane hump hose (#3) onto the factory airbox using two #60 hose clamps (#6). Next install the reducer coupler (#4), small side first, onto the throttle body using two #52 hose clamps (#7). Leave the clamps loose for now.



8. Install the 1/4" barb x 1/8" NPT fitting (#8) into the Airaid Modular Intake Tube (MIT) (#2) as shown. Now slide the 1/4" x 4" hose (#9) onto the barb fitting.



9. Install the MIT into the hump hose first, and then into the reducing coupler. Adjust the MIT snugly against the throttle body, and tighten the 4 hose clamps. Next install the 1/4 - 20 x 1/2" button head bolt (#10) and 1/4" flat washer (#11) thru the Adel clamp and into the MIT to hold the air conditioning hose.

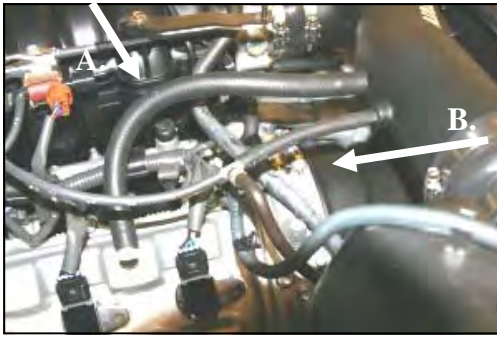

10. A) Install the 1/2" x 13" breather hose (#5) from the MIT to the valve cover.
 B) Install the 1/4" x 1/4" x 1/8" vacuum tee (#12) into the 1/4" x 4" hose (#9) and then to the factory 1/4" and 1/8" vacuum lines, as shown.



11. Reinstall the beauty cover removed in step #1.



12. Double check your work!

Make sure there is no foreign material in the intake path. Make sure all clamps, hoses, bolts, nuts, and screws are tight.

13. Reconnect the negative battery cable!

Before!

After!



Synthamax Air Filters do not require oil. Service air filter as needed by cleaning with common non-petroleum all-purpose household cleaner and water. Simple Green®, Formula 409® or equivalent works great. Apply cleaner to outside of air filter and allow to soak. Then flush filter clean from the inside out with a garden hose and repeat steps if necessary. Do not apply high pressure water or air to clean filter. Allow filter to air dry and reinstall.

SynthaMax®

Do Not Oil

