


INSTALLATION INSTRUCTIONS

2007-14 JK ROOF LIGHT BAR

PART # 15910

PARTS LIST:

Qty's	Description	Qty's	Description
1	Upper Base	10	8mm x 30mm Button Head Bolts
1	Driver/Side Pillar Bracket	2	8mm x 25mm Button Head Bolts
1	Passenger/Side Pillar Bracket	8	8mm x 16mm OD Flat Washers
1	5mm Allen Wrench	12	8mm Lock Washers
4	8mm x 24mm OD Flat Washers		

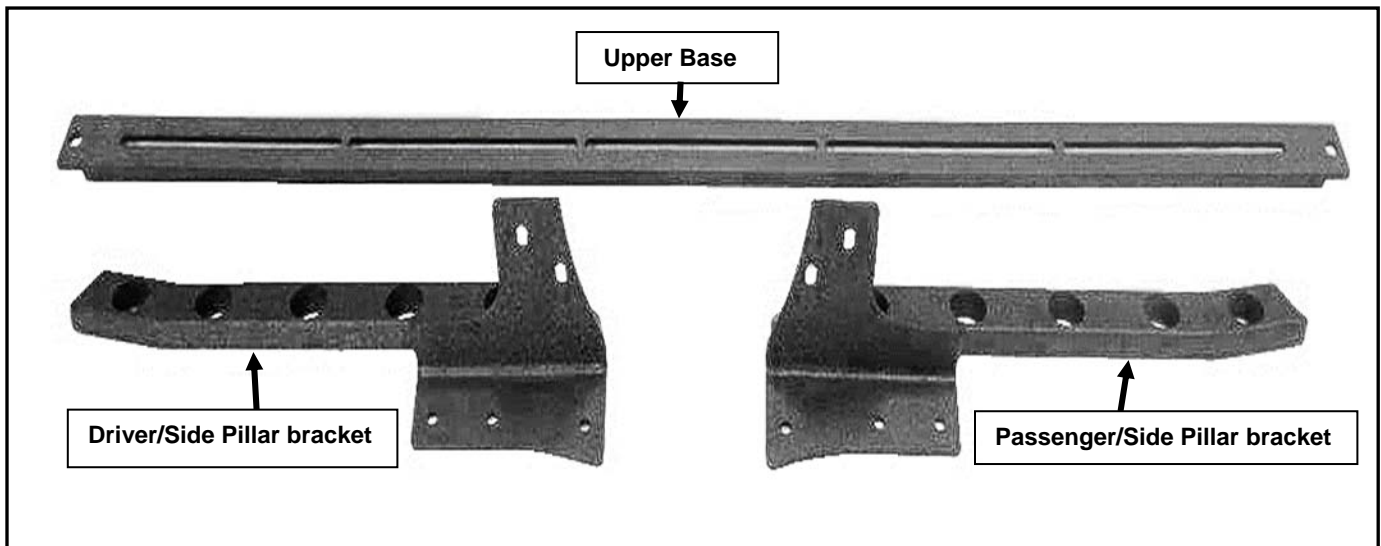

PROCEDURE:

- 1. REMOVE CONTENTS FROM BOX. VERIFY ALL PARTS ARE PRESENT. READ INSTRUCTIONS CAREFULLY BEFORE STARTING INSTALLATION.**
- Starting on the Passenger/Right side of the vehicle at the bottom of the windshield pillar, there are (5) factory Torx bolts securing the hinge of the windshield to the vehicle (3) on the side & (2) in the front remove only one side as seen in **(Fig 1)**
- Once removed selected the Passengers/side pillar bracket from the list of parts above & begin to install by attaching to vehicle with (3) 8mm x 30mm Button head bolts, (3) 8mm x 16mm OD flat washers & (3) 8mm lock washers for the side as seen in **(Fig 2)** Snug but do not tighten hardware, for the front of bracket secure with (2) 8mm x 30mm Button head bolts, (2) 8mm x 24mm OD flat washers & (2) 8mm lock washers, as seen in **(Fig 2A)**. Snug but do not tighten hardware
- Once completed follow Step 2 -3 for the Driver side.
- With both pillar mounting brackets installed to the vehicle select the Upper base from the list of parts above and secure to the pillar brackets with (2) 8mm x 25mm Button head bolts, (2) 8mm x 16mm OD flat washers & (2) 8mm lock washers, as seen in **(Fig 3 & 3A)**. Snug but do not tighten hardware.

6. Level and adjust the light bar, tighten all hardware, Install is now complete.

7. Do periodic inspections to the installation to make sure that all hardware is secure and tight. **To protect your investment**, wax this product after installing. Regular waxing is recommended to add a protective layer over the finish. Do not use any type of polish or wax that may contain abrasives that could damage the finish.

