


# INSTALLATION INSTRUCTIONS

## 2007-12 JK TIRE CARRIER RE-INFORCEMENT

### PART # 25630BK

#### PARTS LIST:

4	Brace Brackets	2	8mm x 60mm Hex Bolts
8	8mm Clip nuts		

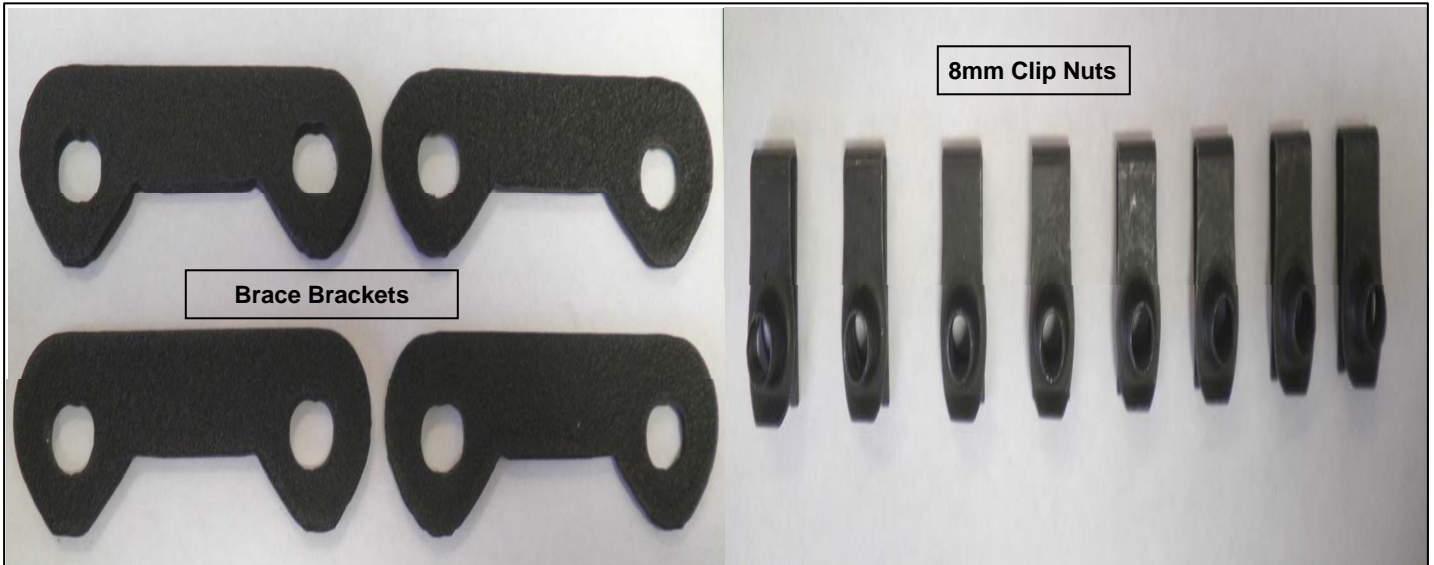

#### PROCEDURE:

1. **REMOVE CONTENTS FROM BOX. VERIFY ALL PARTS ARE PRESENT. READ INSTRUCTIONS CAREFULLY BEFORE**
2. Start by removing the factory tire, with the tire removed open the rear door and remove the plastic panel on the the door this will expose the third brake light wire as seen in **(Fig 1)** bplug wire & slide the wire through the the door you will need to push the rubber plug out as well as seen in **(Fig 2 & 3)** next remove the (8) 8mm bolts holding the tire carrier to the door. Seen in **(Fig 4)** . Also remove the plastic cover on the door which was behind the tire carrier.
3. Select the 8mm x 60mm bolt from the kit and thread it a few turns into one of the 8mm nut which held the tire carrier inplace, bend the bolt up,down and side to side to break the spot welds on the nut remove nut from bolt and proceed to remove the remainig 7 nuts**(Fig 5)** .  
**NOTE: The kit comes with 2 8mm x 60mm bolt incase one breaks.**
4. Next slide the clip nuts onto either side of the brace brackets as seen in**(Fig 6)** with help place the tire carrier back into place and begin to place the brace brackets in through the plastic cover removed in step 2 attach the tire carrier back onto door with the factory bolts into the brace bracket Snug but do not tighten at this time as seen in**(Figs 7)**
5. With the the tire carrier re-attached place the plastic cover back into the door. **(Fig 8)** place the brake light wire back into the hole of the door and push in the rubber plug, plug in the brake light to the wire harness and place the plastic cover back onto the door as seen in **(Fig 1, 2 & 3)**

