

# IMPORTANT

## ISUZU AMIGO, RODEO, TROOPER, AND PICKUPS


THE FOLLOWING PROCEDURES MUST BE COMPLETED TO PROPERLY ADJUST THE CLUTCH.

### CABLE SYSTEM:

THE CABLE CAN BE ADJUSTED FROM THE ENGINE SIDE OF THE FIREWALL. THE FREE PLAY SHOULD BE BETWEEN 3/16" - 1/4". (1)

### HYDRAULIC SYSTEMS:

CLUTCH PEDAL HEIGHT (2) SHOULD BE ADJUSTED TO MANUFACTURERS SPECIFICATIONS (REFER TO SERVICE MANUAL). THE CLUTCH PEDAL HEIGHT IS ADJUSTED BY TURNING THE CLUTCH SWITCH (4) OR THE CLUTCH PEDAL HEIGHT ADJUSTMENT BOLT (3). CLUTCH PEDAL FREEPLAY SHOULD BE BETWEEN 1/4" - 1/2". IF OUT OF SPECIFICATION, ADJUST BY CHANGING THE LENGTH OF THE MASTER CYLINDER ROD (3,4).

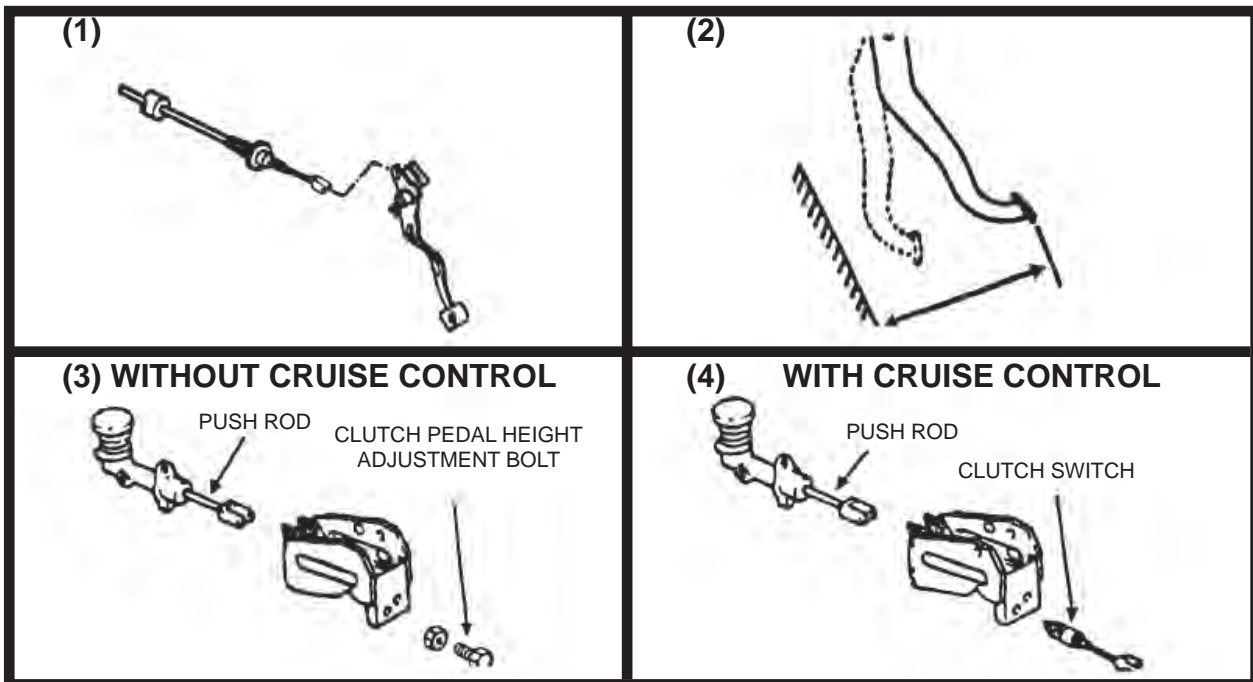

"NOTE" Centerforce tip sheets are for general reference only. Please refer to your owners manual for vehicle specifications.

# IMPORTANT