


INSTALLATION INSTRUCTIONS

⚠ WARNING: DO NOT EXCEED PRODUCT RATING OR TOW VEHICLE LAMP LOAD RATING, WHICHEVER IS LOWER

APPLICATIONS

Make	Model
Toyota	Hilux (Mexican vehicle)
Toyota	T-100
Toyota	Tacoma

CUSTOM WIRING HARNESS

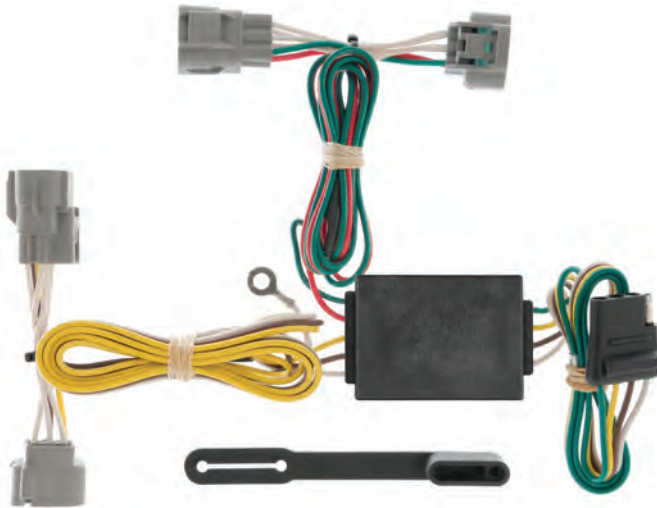

WIRING LOCATION GUIDE

PICKUP TRUCKS (T)

Representative vehicle shown below

T1 - Behind driver side taillight housing

T2 - Behind passenger side taillight housing

T3 - Behind driver side rear bumper

T5 - Behind passenger side rear bumper



NOTICE

All steps must be followed to ensure the wiring harness will function properly. Once installed, test for proper function by using a test light or connecting a properly wired trailer.

TOOLS NEEDED

10mm socket

Ratchet

⚠ WARNING

Exceeding the product rating can cause loss of warranty, overheating and potential fire. Do not exceed product rating or tow vehicle lamp load rating, whichever is lower.

Signal Circuits - 3.0 amps per side

Tail / Running Circuits - 7.5 amps total

Check vehicle owner's manual or contact the vehicle manufacturer for more information.

INSTALLATION / SAFETY INSTRUCTIONS

Step 1

Locate vehicle battery on the driver side under the hood and disconnect the negative battery terminal.

Step 2 - Toyota Tacoma

Open the vehicle tailgate. Remove the 10mm screws holding the vehicle taillights in place and remove the taillights (A).

Step 2 - Toyota T-100

The wiring harness will have connection points on the driver and passenger side of the frame.

Step 3

The connectors will be similar to those on the T-connector harness. Separate the connectors from the taillight housing taking care not to damage the locking tabs (B).

Step 4


Insert the custom wiring harness end with yellow wire between the separated connectors. Make sure the connectors are fully inserted with locking tabs in place (C).

Step 5 - Toyota Tacoma

Route the custom wiring harness end with the green wire to the passenger side out through the hole between the vehicle bumper and body (D). Repeat step 4 on the passenger side using the harness end with the green wire.

Step 5 - Toyota T-100

Route the custom wiring harness end with the green wire to the passenger side. Repeat step 4 on the passenger side using the harness end with the green wire.

 **WARNING:** Check for miscellaneous items that may be hidden behind or under any surface before drilling to avoid damage and / or personal injury.

Step 6

Locate a suitable grounding point near the connector such as an existing screw with nut in the vehicle frame or drill a 3/32" pilot hole for the provided screw. The area should be free of rust, dirt and paint. Secure the white ground wire using the ring terminal and provided screw.

Step 7

Locate a flat spot inside the vehicle, near the taillight. Adhere the black converter box using the provided double-sided tape (E).

Step 8

Reinstall all items removed during install and reconnect negative battery terminal. Install the provided 4-flat dust cover to help prevent corrosion.

