

**11521****89-92 DODGE COLT / MITSUBISHI MIRAGE**


12/14/2012

GROSS LOAD CAPACITY WHEN USED AS A WEIGHT CARRYING HITCH: 1,000 LBS. TRAILER WEIGHT &amp; 100 LBS. TONGUE WEIGHT.

**\*\*\*DO NOT EXCEED VEHICLE MANUFACTURER'S RECOMMENDED TOWING CAPACITY.\*\*\*****WARNING: ALL NON-TRAILER LOADS APPLIED TO THIS PRODUCT MUST BE SUPPORTED BY AUXILIARY STABILIZING STRAPS.****\*\* FAILURE TO PROPERLY SUPPORT NON-TRAILER LOADS WILL VOID PRODUCT WARRANTY\*\***

HAVING INSTALLATION QUESTIONS? CALL TECHNICAL SUPPORT AT 1-800-798-0813

Parts List			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	1	1/2-13 x 1 3/4	HEX BOLT
2	2	7/16-14 x 1 1/2	HEX BOLT
3	2	7/16 LOCK WASHER	HELICAL LOCK WASHER
4	1	CM-SP24	.250 x 2.00 x 2.00" ROUND HOLE SPACER
5	1	HFN 1213	HEX FLANGE NUT
6	2	7_16-14 TAB NUT	HANDLE NUT
7	1	CM-11521-SP	.313 x 1.25 SPACER BLOCK

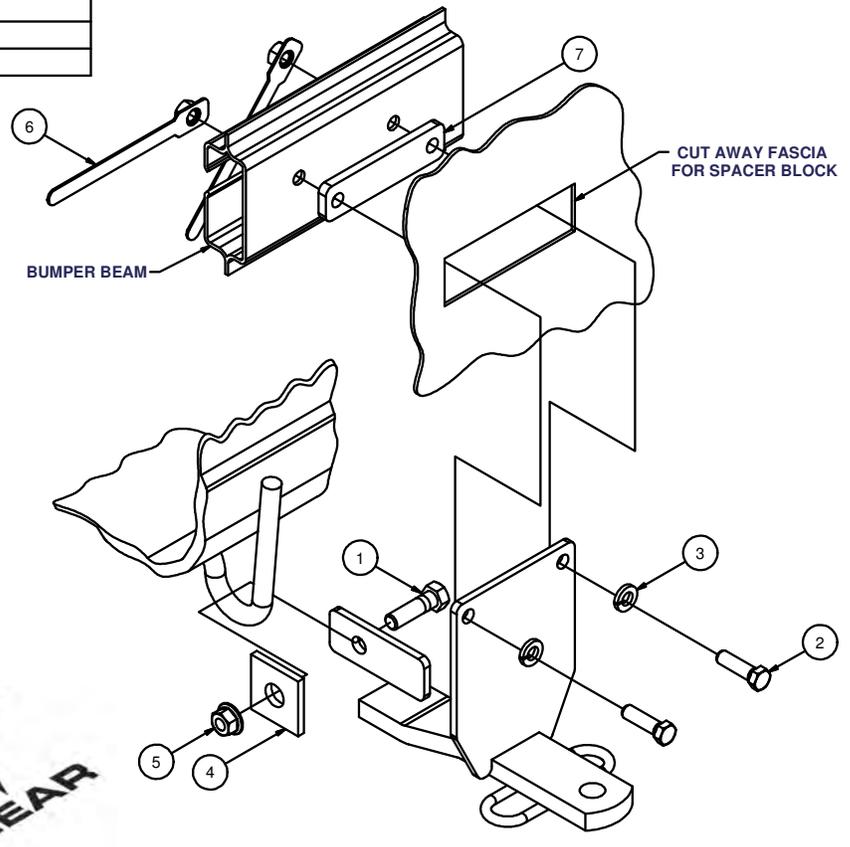

HITCH WEIGHT: 7 LBS.

INSTALL TIME

PROFESSIONAL: 45 MINUTES

NOVICE (DIY): 90 MINUTES

INSTALL NOTES:

- DRILLING REQUIRED
- REMOVE LICENSE PLATE
- TRIM FASCIA

**INSTALLATION STEPS**

1. Remove the rear licence plate. Position the hitch on the car as shown. The hitch tab is placed to the right (passenger) side of the vehicle tie down bracket. Temporarily fasten the hitch at the tie down using fasteners as shown, and level the hitch in final position.
2. Mark the bumper fascia and cut away for spacer block to fit directly against the bumper beam.
3. Use the hitch holes to mark the bumper beam for mounting holes. Drill these holes for 7/16" diameter bolts.
4. Fasten the hitch at the bumper using fasteners as shown. Handle nuts are placed through existing access holes in the forward side of the bumper beam OR by making additional holes in the fascia and bumper beam under license plate, but to either side of the hitch bracket.
5. Torque all 1/2" fasteners to 110 lb-ft, and all 7/16" fasteners to 70 lb-ft.

**PERIODICALLY CHECK THIS RECEIVER HITCH TO ENSURE THAT ALL FASTENERS ARE TIGHT AND THAT ALL STRUCTURAL COMPONENTS ARE SOUND.**

Curt Manufacturing Inc., warrants this product to be free of defects in material and/or workmanship at the time of retail purchase by the original purchaser. If the product is found to be defective, Curt Manufacturing Inc., may repair or replace the product, at their option, when the product is returned, prepaid, with proof of purchase. Alteration to, misuse of, or improper installation of this product voids the warranty. Curt Manufacturing Inc.'s liability is limited to repair or replacement of products found to be defective, and specifically excludes liability for incidental or consequential loss or damage.