

11659**85-90 VOLKSWAGEN JETTA**

12/14/2012

GROSS LOAD CAPACITY WHEN USED AS A WEIGHT CARRYING HITCH: 2,000 LBS. TRAILER WEIGHT & 200 LBS. TONGUE WEIGHT.


DO NOT EXCEED VEHICLE MANUFACTURER'S RECOMMENDED TOWING CAPACITY.

WARNING: ALL NON-TRAILER LOADS APPLIED TO THIS PRODUCT MUST BE SUPPORTED BY 18050 STABILIZING STRAPS.

** FAILURE TO PROPERLY SUPPORT NON-TRAILER LOADS WILL VOID PRODUCT WARRANTY**

HAVING INSTALLATION QUESTIONS? CALL TECHNICAL SUPPORT AT 1-800-798-0813

Parts List			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	2	7/16 WASHER	WASHER
2	2	7/16 LOCK WASHER	HELICAL LOCK WASHER
3	2	7/16-14	HEX NUT
4	2	7/16-14 x 1 1/2	HEX BOLT
5	2	3/8-16 X 1 1/2	HEX BOLT
6	2	3/8 - 16 x 1 1/4	HEX BOLT
7	4	3/8"	FENDER WASHER
8	4	3/8"	LOCK WASHER
9	4	3/8 - 16	HEX NUT
10	2	CM-SP102	.25 x 1.75 x 2.00 SPACER

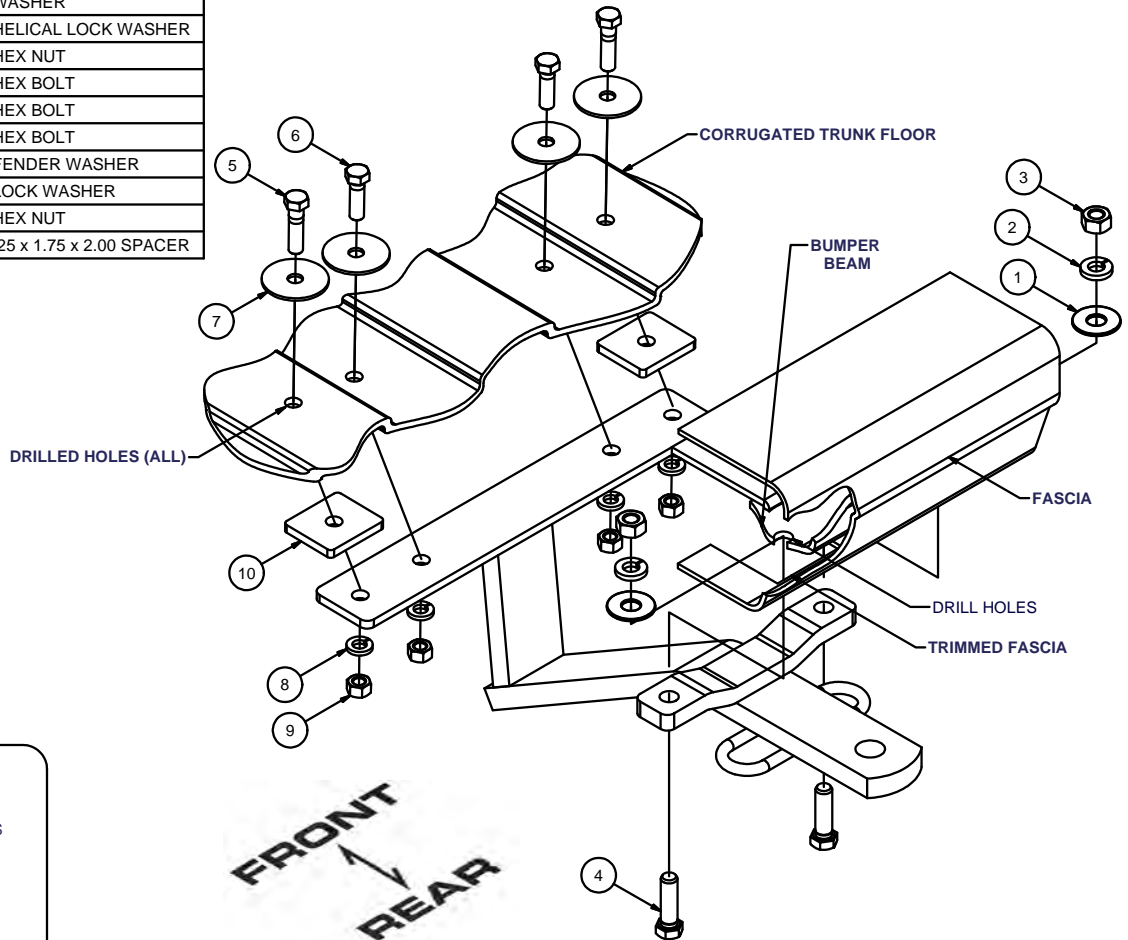

HITCH WEIGHT: 11 LBS.

INSTALL TIME

PROFESSIONAL: 30 MINUTES

NOVICE (DIY): 60 MINUTES

INSTALL NOTES:

- DRILLING REQUIRED
- SILICONE SEAL HARDWARE
- TRIM FASCIA
- CLEAR TRUNK

INSTALLATION STEPS

1. Position the hitch against the vehicle's trunk and bumper as shown so hitch is centered and square with the vehicle. Remove plastic fascia where hitch contacts the bumper beam. Use the hitch as a template to mark and center punch (4) places in trunk floor and (2) places at the bumper beam.
2. Clear the trunk for drilling. Drill (4) places in trunk floor for 3/8" bolts, and (2) places in bumper beam for 7/16" bolts.
3. Mount hitch to vehicle as shown. Note that fender washers are placed inside trunk, opposite hitch. Use CM-SP102 spacers between hitch and corrugated trunk floor with longer 1-1/2" bolts at outside holes in trunk.
4. Torque all 3/8" fasteners to 45 lb-ft, and all 7/16" fasteners to 70 lb-ft.
5. Use silicone sealant to seal hardware installed through trunk floor.
6. Reinstall contents removed in Step 2.

PERIODICALLY CHECK THIS RECEIVER HITCH TO ENSURE THAT ALL FASTENERS
ARE TIGHT AND THAT ALL STRUCTURAL COMPONENTS ARE SOUND.

Curt Manufacturing Inc., warrants this product to be free of defects in material and/or workmanship at the time of retail purchase by the original purchaser. If the product is found to be defective, Curt Manufacturing Inc., may repair or replace the product, at their option, when the product is returned, prepaid, with proof of purchase. Alteration to, misuse of, or improper installation of this product voids the warranty. Curt Manufacturing Inc.'s liability is limited to repair or replacement of products found to be defective, and specifically excludes liability for incidental or consequential loss or damage.

217403