



**Before returning this product
to the store of purchase**

Contact Dee Zee if you experience the following problems:


- Missing Parts
- Installation Problems/Questions
- Warranty Questions

1.800.779.2102

Hours of operation: 8am - 5pm CST, Mon-Friday

Review complete warranty policy and register your product at:

www.deezee.com/warranty.php

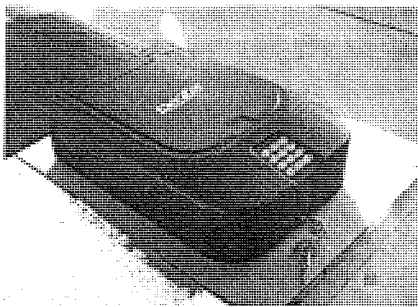

English Instructions (safe)

*Please read this sheet before using your safe. Retain this sheet for your records.

Operating Instructions:

Insert key in keyhole and turn counterclockwise to open.

(Note: batteries are not installed, must first open safe with key)

Installing Batteries:

Remove black plastic liner and open battery cover. Install(4) AA batteries(Fig.1).Insert

Battery holder so that the side with the three round brass connectors goes in first.

Carefully replace battery cover and plastic liner. NOTE: Battery cover will recess into battery compartment if pressed in too hard.

Opening door:

Your safe is set to a factory code of 168. Enter code and press "#". The door will automatically open. You can change your code by following the instructions below.

Your code can be 3 to 6 digits long and can be set with the door open or closed.

If you input the wrong code 3 times, the safe will automatically go into lockout for 5 minutes.

To Change Your Code:

Press "0" twice, followed by "#". Enter original code of 168, followed by "#". Enter new code followed by "#". Enter new code again followed by "#".

Your new code should now work to open the safe.

To Open Safe:

Enter 3 to 6 digit code followed by "#".

To Close Safe:

Press the lid down until you hear a click to indicate safe is locked.

To Change Batteries:

When the batteries are low, an alarm will sound to tell you to change the batteries.

Follow instructions above for installing batteries.

You Lose Your Code:

If you lose or have forgotten your code, open the safe with the key and press the black reset button, located inside the front of the safe(Fig.2). This will reset your code to the factory code of 168.

Use instructions above to set your own code again.

Mounting Plate Instructions:

Release mounting plate from safe by pressing firmly down on release button located inside the front of the safe.(Fig.3)

Position mounting plate where you want to install it. There are several mounting holes to choose from (Fig.4).

Select which holes to use and secure with hardware provided or with your own hardware.

If you choose to install the security cable, it should be looped around the back post before putting safe on mounting plate.(Fig.5)

Put safe on mounting plate and click into place.(Fig.6)

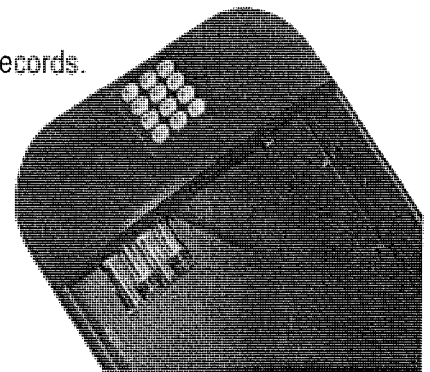


Fig.1

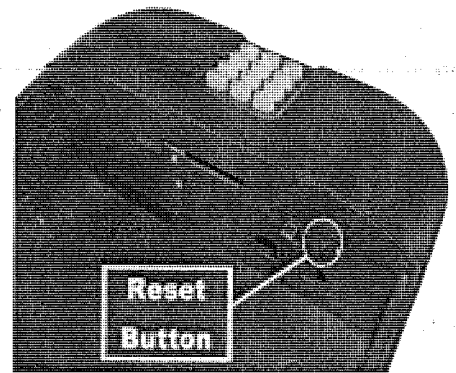


Fig.2

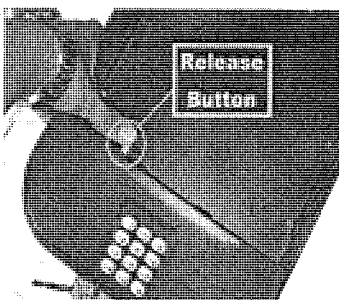


Fig.3

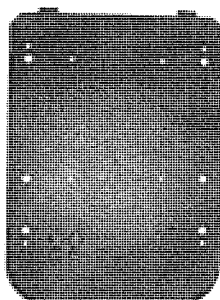


Fig.4

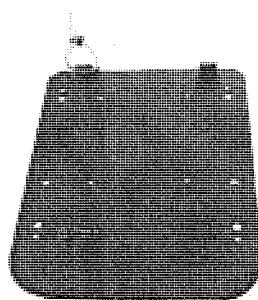


Fig.5

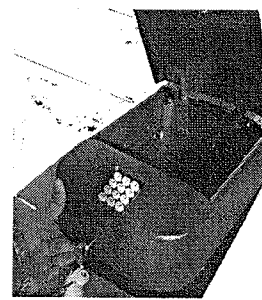


Fig.6

