



Edelbrock Shaft Speed Sensor Kit
Catalog # 91115, 91116
INSTALLATION INSTRUCTIONS


PLEASE study these instructions carefully before installing your new Edelbrock Shaft Speed Sensor Kit. If you have any questions please contact our Technical Hotline at: 1-800-416-8628, from 7am-5pm, Monday through Friday, Pacific Standard Time.

DESCRIPTION: Edelbrock Speed Sensors are Reed type magnetically triggered sensors used for monitoring component speeds such as Engine RPM, Shaft Speeds, Wheel Speeds etc. Sensor state is normally open and closes with passing of trigger magnet creating a digital pulse output signal for use with Qwikdata, QwikData 2 or any data system with digital inputs. Sensor Body is 5/16-24 and will fit most Bell Housings for Input Shaft Speed applications. Mounting Brackets and Driveshaft Speed kits are also available from Edelbrock.


Note: Sensors will trigger from either north or south pole magnets

Kit Contents: #91115	Kit Contents: #91116
1 - Shaft Speed Sensor	1 - Shaft Speed Sensor
	2 - Cobalt Magnets

Pin	Function
1	Ground
2	Signal
3	n/c
4	n/c

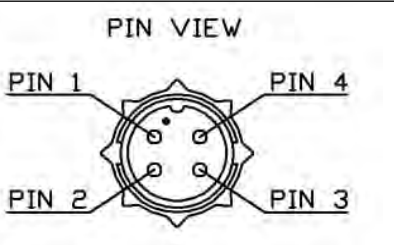

Recommended Air Gap: 0.080 to 0.120. Adjustment may be necessary to obtain clean signal..

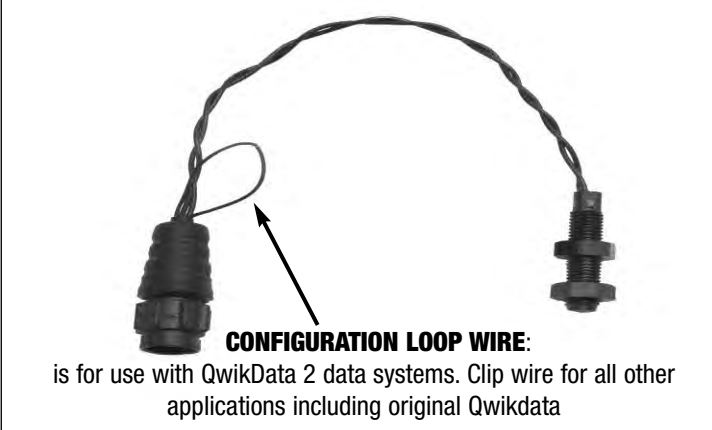

Edelbrock Shaft Speed Sensor Kit
Catalog # 91115, 91116
INSTALLATION INSTRUCTIONS


PLEASE study these instructions carefully before installing your new Edelbrock Shaft Speed Sensor Kit. If you have any questions please contact our Technical Hotline at: 1-800-416-8628, from 7am-5pm, Monday through Friday, Pacific Standard Time.

DESCRIPTION: Edelbrock Speed Sensors are Reed type magnetically triggered sensors used for monitoring component speeds such as Engine RPM, Shaft Speeds, Wheel Speeds etc. Sensor state is normally open and closes with passing of trigger magnet creating a digital pulse output signal for use with Qwikdata, QwikData 2 or any data system with digital inputs. Sensor Body is 5/16-24 and will fit most Bell Housings for Input Shaft Speed applications. Mounting Brackets and Driveshaft Speed kits are also available from Edelbrock.

Note: Sensors will trigger from either north or south pole magnets

Kit Contents: #91115	Kit Contents: #91116
1 - Shaft Speed Sensor	1 - Shaft Speed Sensor
	2 - Cobalt Magnets

Pin	Function
1	Ground
2	Signal
3	n/c
4	n/c

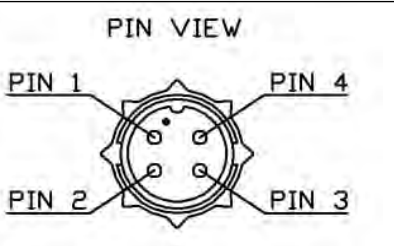

Recommended Air Gap: 0.080 to 0.120. Adjustment may be necessary to obtain clean signal..

