


THANK YOU FOR SELECTING A HUSKY FLOOR LINER FROM WINFIELD CONSUMER PRODUCTS

CARE AND USE INSTRUCTIONS

Your new liner is custom molded to fit your vehicle. Upon removal from the box your liner will not completely unroll and lay flat. This is normal and only temporary. Just place the liner on the floor or in the back of your vehicle with a weight in each corner (a book works well). After about 15 minutes, your liner will remain flat. In colder climates this “relaxing” may take longer; moving the liner to a heated area will accelerate the process.

Your liner is manufactured using an engineering resin that is lightweight and extremely tough and durable. The easiest way to clean your liner is with a damp cloth or sponge. If using a cleaner, 409[®] or Glass Plus[®] work well. Use of Armor All[®], Son-of-a-Gun[®] or similar items is discouraged as these products make the liner slick.

INSTALLATION INSTRUCTIONS FOR YOUR NISSAN ROGUE CARGO LINER

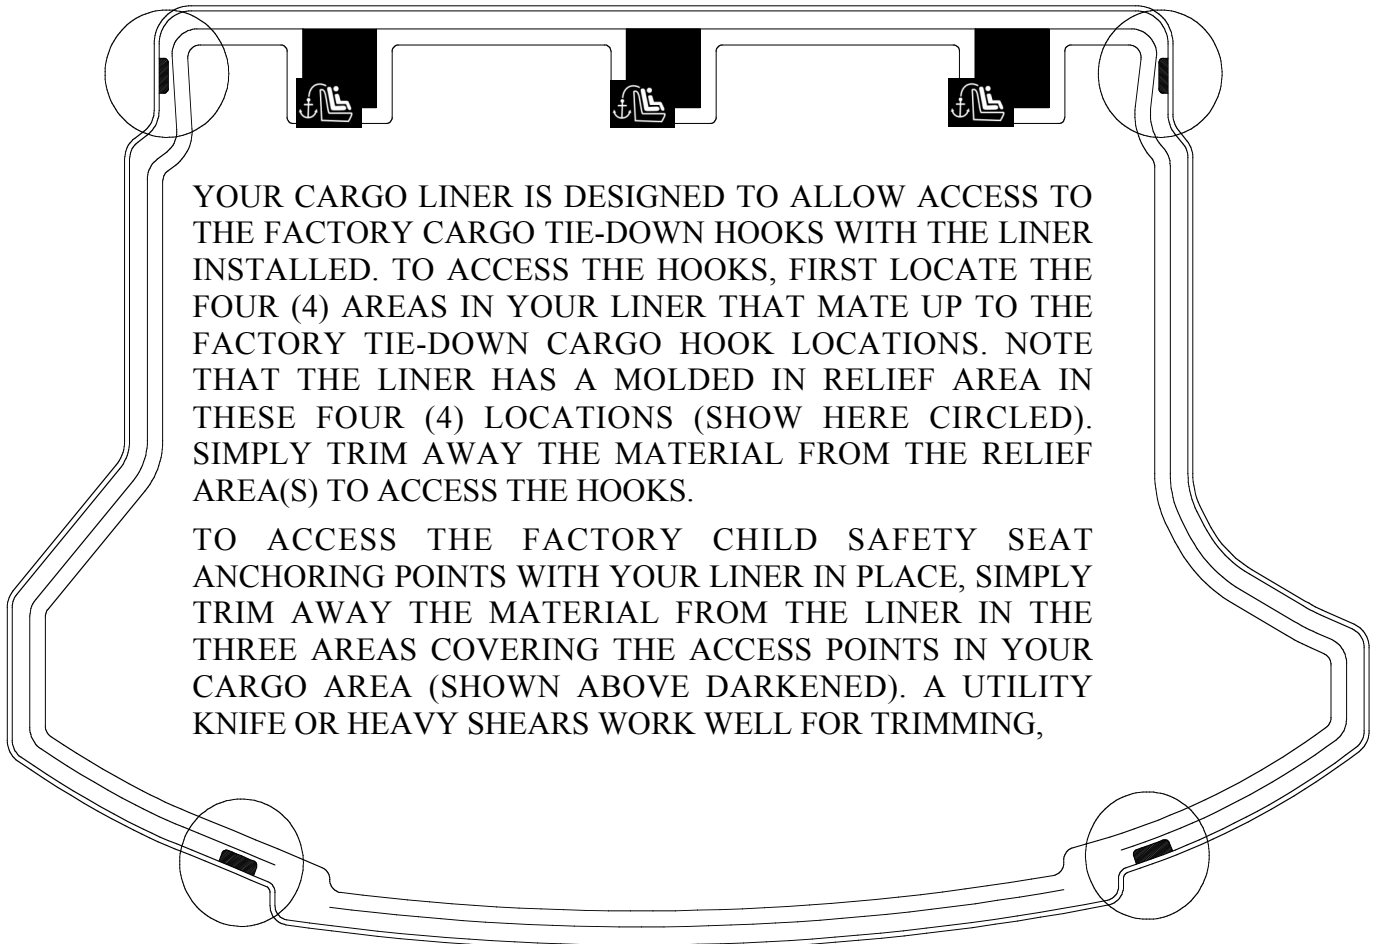

YOUR CARGO LINER IS DESIGNED TO ALLOW ACCESS TO THE FACTORY CARGO TIE-DOWN HOOKS WITH THE LINER INSTALLED. TO ACCESS THE HOOKS, FIRST LOCATE THE FOUR (4) AREAS IN YOUR LINER THAT MATE UP TO THE FACTORY TIE-DOWN CARGO HOOK LOCATIONS. NOTE THAT THE LINER HAS A MOLDED IN RELIEF AREA IN THESE FOUR (4) LOCATIONS (SHOW HERE CIRCLED). SIMPLY TRIM AWAY THE MATERIAL FROM THE RELIEF AREA(S) TO ACCESS THE HOOKS.

TO ACCESS THE FACTORY CHILD SAFETY SEAT ANCHORING POINTS WITH YOUR LINER IN PLACE, SIMPLY TRIM AWAY THE MATERIAL FROM THE LINER IN THE THREE AREAS COVERING THE ACCESS POINTS IN YOUR CARGO AREA (SHOWN ABOVE DARKENED). A UTILITY KNIFE OR HEAVY SHEARS WORK WELL FOR TRIMMING,