


**THANK YOU FOR SELECTING A HUSKY FLOOR LINER
FROM WINFIELD CONSUMER PRODUCTS
CARE AND USE INSTRUCTIONS**

Your new floor liners are custom molded to fit your particular vehicle. The liners are made to take the place of your factory floor mats. For correct fit, it is necessary to remove the factory floor mats before installing your new floor liners. *However, do not remove the factory-installed carpeting.*

Your liners are made from an engineering resin that is lightweight and extremely tough and durable. The easiest way to clean your liners is with a damp cloth or sponge. If using a cleaner, 409[®] or Glass Plus[®] work well. Use of Armor All[®], Son-of-a-Gun[®] or similar items is discouraged as these products make the liners slick.

**INSTALLATION INSTRUCTIONS FOR YOUR 2003 FORD EXPEDITION
AND 2003 LINCOLN NAVIGATOR SECOND SEAT LINER**

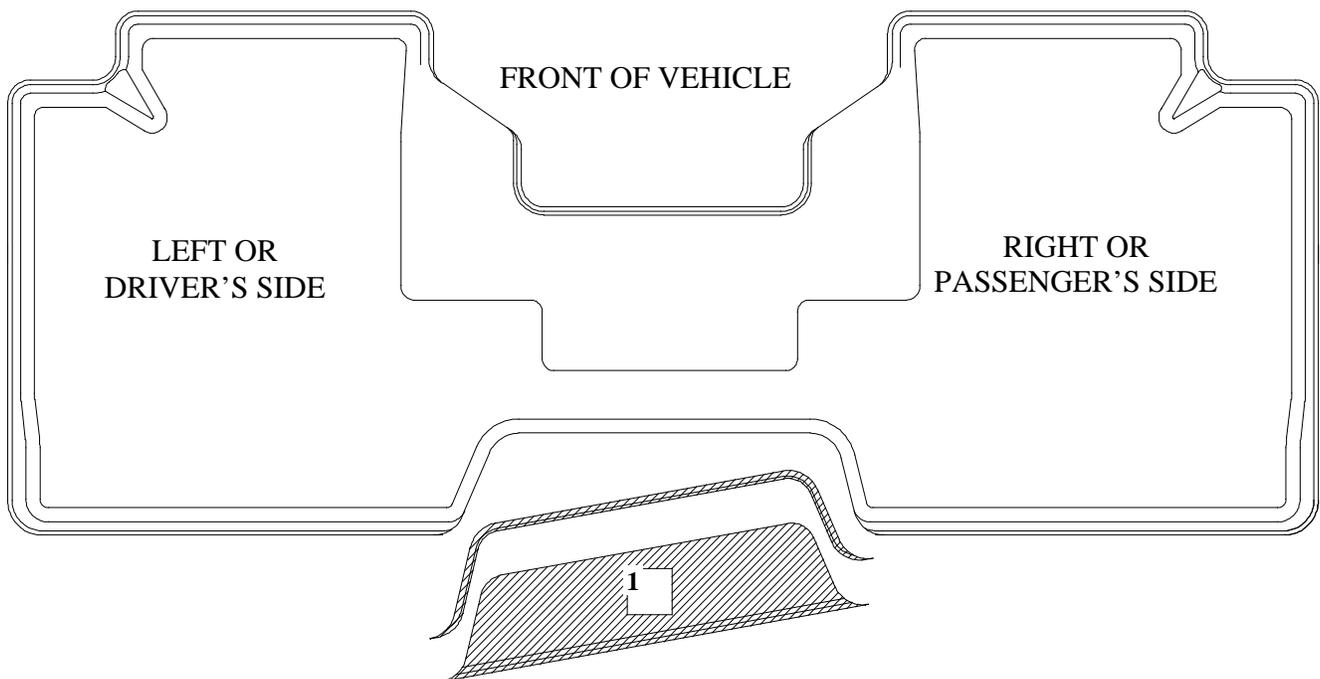

NAVIGATOR OWNERS WITH VEHICLES EQUIPPED WITH THE SECOND SEAT CONSOLE WILL NEED TO TRIM THEIR LINER TO ALLOW FOR THE CORRECT FIT. TRIM AWAY AREA "1" (SHOWN ABOVE CROSS HATCHED) BY USING THE MOLDED IN GROOVE. TRIM THROUGH THE REMAINING REAR WALL TO COMPLETE THE TRIM. A UTILITY KNIFE OR HEAVY SHEARS WORK WELL FOR TRIMMING.

EXPEDITION OWNERS WHOSE VEHICLE IS EQUIPPED WITH THE 40/20/40 SECOND ROW BENCH SEAT HAVE THE OPTION OF SLIDING THE MIDDLE SECTION OF THAT SEAT FORWARD TO ACCESS CHILD SAFETY SEATS. BEFORE THE SEAT WILL SLIDE FORWARD, THE LINER WALL NEEDS TO BE TRIMMED. TRIM AWAY BOTH SECTION "1" (SHOWN ABOVE) AND THE REMAINING WALL TO ALLOW SEAT TRACK CLEARANCE. USE THE 5/8" RAISED BAND AS A GUIDE FOR TRIMMING.