

# THANK YOU FOR SELECTING A HUSKY FLOOR LINER FROM WINFIELD CONSUMER PRODUCTS

## CARE AND USE INSTRUCTIONS


---

Your new floor liner is custom molded to fit your particular vehicle. The liner is made to take the place of your factory floor mats. For correct fit, it is necessary to remove the factory floor mat before installing your new floor liner. *However, do not remove the factory-installed carpeting.*

Your liner is made from an engineering resin that is lightweight and extremely tough and durable. The easiest way to clean your liner is with a damp cloth or sponge. If using a cleaner, 409® or Glass Plus® work well. Use of Armor All®, Son-of-a-Gun® or similar items is discouraged as these products make the liner slick.

## INSTALLATION INSTRUCTIONS FOR YOUR BUICK ENCLAVE/GMC ACADIA/SATURN OUTLOOK 3<sup>RD</sup> SEAT LINER (VEHICLES WITH 2<sup>ND</sup> ROW BENCH SEATS ONLY)

FRONT OF VEHICLE

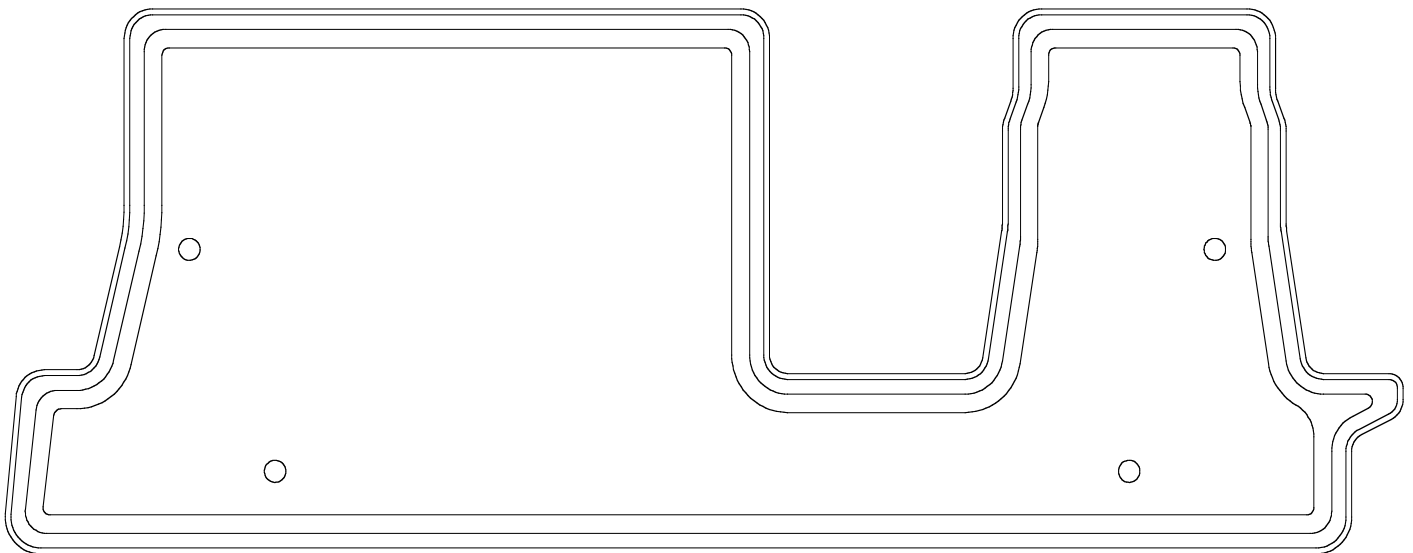

TO EASE INSTALLATION OF YOUR THIRD SEAT LINER PART #7103, FIRST MOVE BOTH OF THE SECOND ROW SEATS TO THEIR MOST FORWARD POSITIONS--THE "SELF STORING" POSITION OFFERS THE MOST ROOM FOR INSTALLATION, THOUGH IF YOU HAVE THE SECOND ROW LINER INSTALLED, YOU MAY NEED TO REMOVE IT FIRST. WITH THE 2<sup>ND</sup> ROW SEATS POSITIONED OUT OF THE WAY, PLACE THE LINER IN THE VEHICLE AS DEPICTED IN THE DRAWING ABOVE.

WITH PART #7103 IN PLACE, SIMPLY REPOSITION THE SECOND ROW SEATS TO THEIR DESIRED LOCATION AND REPLACE SECOND SEAT LINER.