




LAKEWOOD 15230 SERIES FASTENER REQUIREMENTS Ford 4.6L & 5.4L V8

For this product to meet SFI specification 6.1 the fasteners listed below must be used.

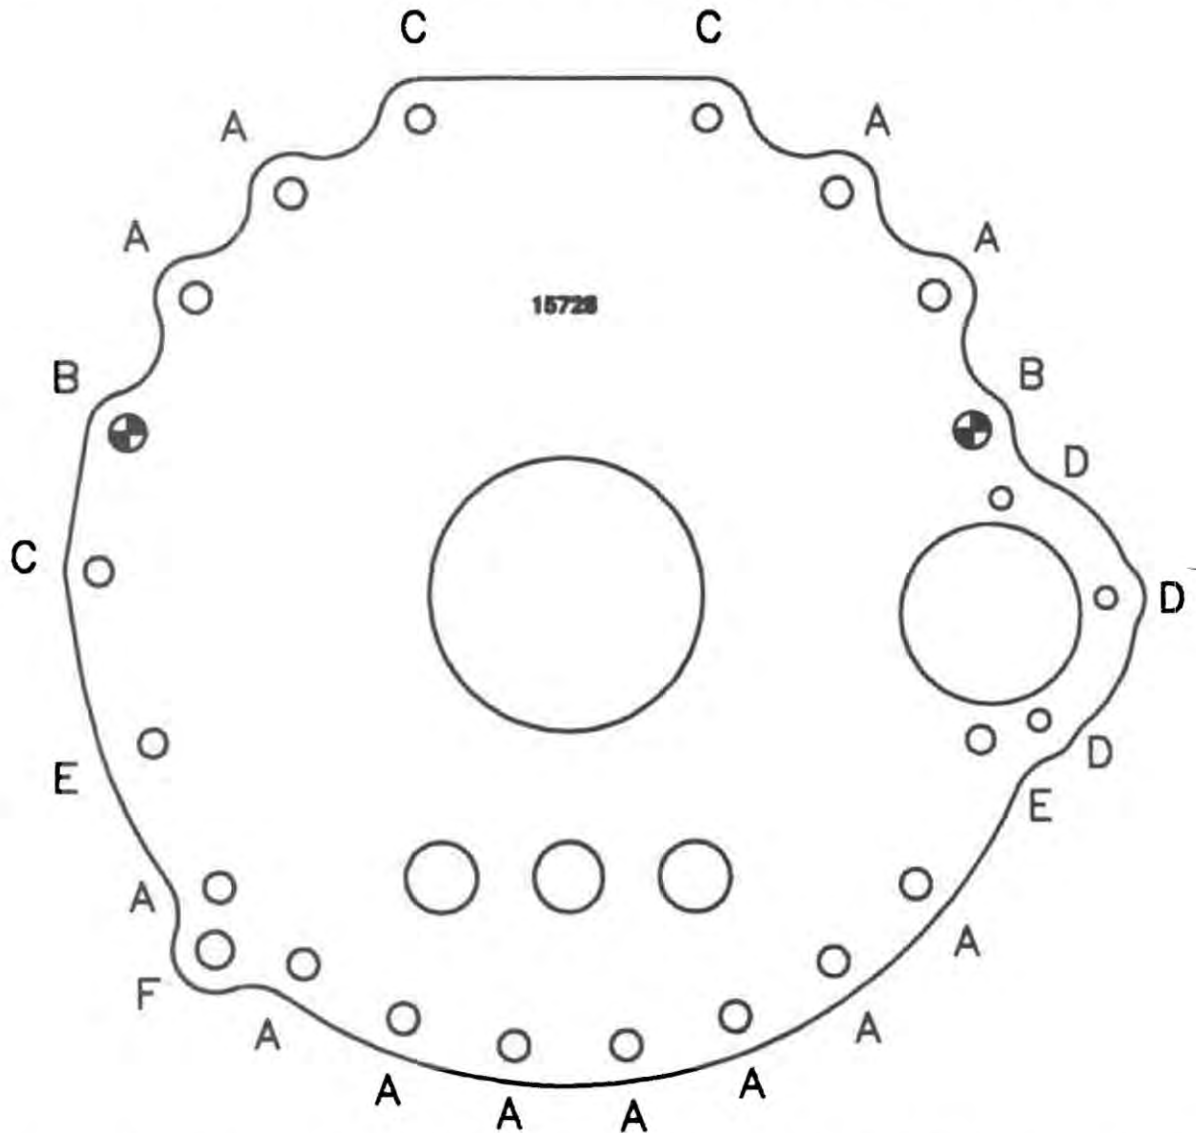

- A = 1/2-13 X 1" GRADE 8 BOLTS, WASHERS & NUTS.
- B = BELLHOUSING LOCATING TUBES (NOT INCLUDED)
- C = M10 x 1.5 x 35mm CLASS 10.9 BOLTS & WASHERS.
- D = M8 x 1.5 x 30mm CLASS 9.8 STARTER BOLTS
- E = M10 x 1.5 x 35mm CLASS 10.9 CAP SCREW.
- F = CLUTCH CABLE HOLE