

INSTALLATION INSTRUCTIONS LOKAR UNIVERSAL DOOR LATCH CABLE RELEASE KIT (DLR-2100)

NOTE: PRIOR TO INSTALLATION, PREDETERMINE THE DISTANCES BETWEEN DOOR WINDOWS AND

YOUR DESIRED MOUNTING POSITION TO INSURE THAT WINDOWS WILL FUNCTION ONCE THE

KIT IS INSTALLED AND THEN PROCEED WITH MOUNTING INSTRUCTIONS.

STEP 1: Be sure that door handle and door latch are installed.

STEP 2: Connect clevis to door latch arm and run wire to determine where to mount shielded pulley. Shielded

pulley should be mounted so that you make a straight pull. Fig. 1

STEP 3: Mount shielded pulley to inside door panel using $10/32 \times 1/2$ bolt provided in kit, or bolt of your choice.

CAUTION: Do not use too long of a bolt which could interfere with window closing.

STEP 4: Once shielded pulley is mounted, connect cable end assembly to door handle lever and take slack out of

cable wire and cut to length.

STEP 5: If removal of door handle is necessary, snap cable end assembly off cable end assembly ball.

OPTIONAL MOUNTING CHOICE:

For different mounting option, **See Fig. 2** that uses a second shielded pulley (can be purchased separately) and follow above instructions.

LOKAR, INC.

10924 Murdock Drive, Knoxville, TN 37932 Toll Free 1-877-469-7440

Ph: 865-966-2269 Fax: 865-671-1999 E-mail: tech@lokar.com or catalog@lokar.com www.lokar.com

©2000 Lokar, Inc. Rev. 11/17/00

FIGURE #1


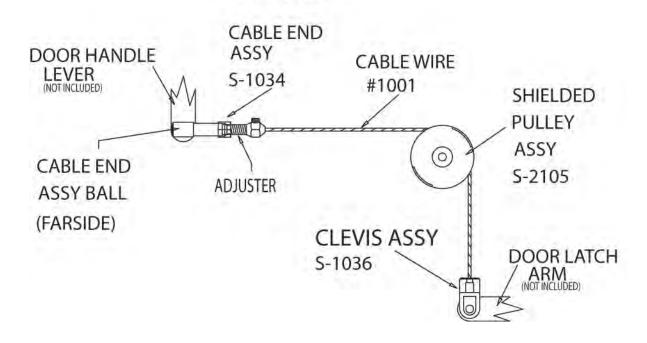


FIGURE #2

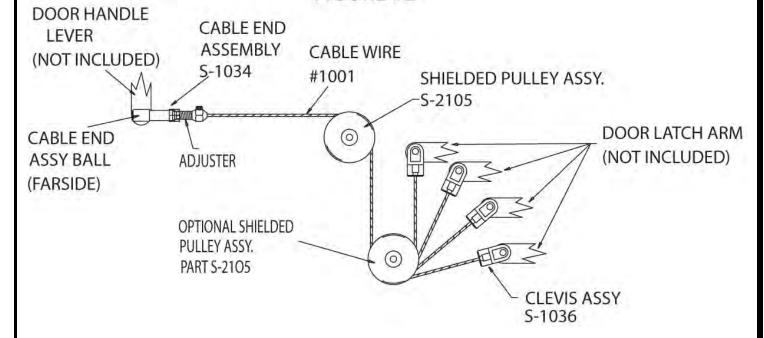

LOKAR, INC.

10924 Murdock Drive, Knoxville, TN 37932
Toll Free 1-877-469-7440

Ph: 865-966-2269 Fax: 865-671-1999 E-mail: tech@lokar.com or catalog@lokar.com www.lokar.com

©2000 Lokar, Inc. Rev. 11/17/00