

## Care and Cleaning

To keep your LUND® Grille looking its best we recommend using only mild soap, water and soft cotton cloth to wash (and dry). Harsh cleaning agents or cloths may scratch or dull your grille.

Should your grille become scratched or dull you may use high quality, commercially-available, non-abrasive polish recommended specific for your grille's metal type.

If you have questions or concerns on the care of your LUND® grille, please call 800-328-5863.

## Congratulations!

You have purchased one of many quality Lund® branded products offered by Lund International, Inc. We take the utmost pride in our products and want you to enjoy years of satisfaction from your investment. We have made every effort to ensure that your product is top quality in terms of fit, durability, finish and ease of installation.



Lund International, Lund Accessories Division  
300 Horizon Drive  
Suwanee, GA 30024

Phone 800-328-5863 • Fax 800-782-5448 • Visit us at [lundinternational.com](http://lundinternational.com)

© 2005 Lund International, Inc. All rights reserved.  
Lund® and the Lund® logo are trademarks of Lund International, Inc.



## Installation Instructions

Part Number 84177

I-sheet Rev. A1



## Original Bar Grille

For proper installation and best possible fit, please read all instructions **BEFORE** you begin.  
For technical assistance or to obtain missing parts, please call Customer Relations at 1-800-328-5863.

## Important Safety Information




CAUTION  
PRECAUCIÓN  
ATTENTION

To avoid risk of personal injury or property damage:

- Wear safety glasses and gloves while installing billet inserts.
- Use caution when working with any power tools.
- Check clearance on vehicle.
- Make sure that the billet inserts are secured in place and clears all moving parts of the vehicle.
- Routinely check security of hardware.
- Do not use automatic "brush-style" car washes.

## Contents


Illustrations may vary upon application

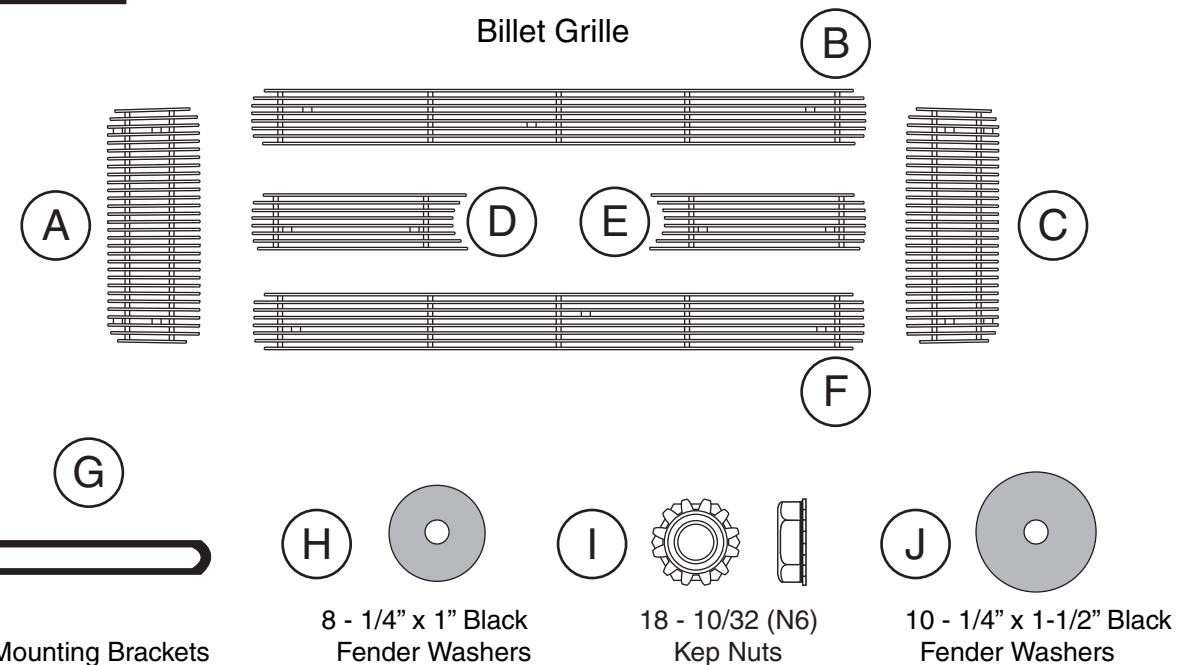

## Tools Required



Safety Glasses  
and Gloves



Ratchet with  
10mm Socket



10mm Wrench


## Shipping Note

Sometimes the billet products get bent in the shipping process. You may need to hand bend them to attain the desired shape.

# Installation Steps

Illustrations may vary upon application


Pop the hood and keep the grille shell at a comfortable working height.

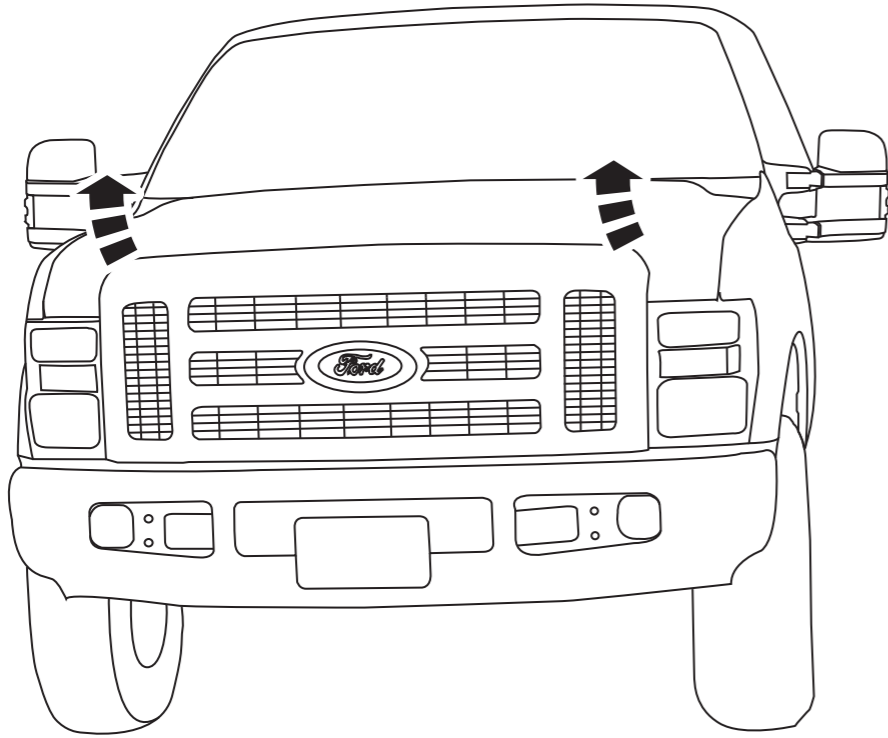

1


Insert the grille pieces into the front of the stock grille shell and attach with provided hardware. Parts G, H, and I are used to mount grille pieces A and C, while parts I & J are used to mount grille pieces B, C, D and F.

Grille Pieces A-F

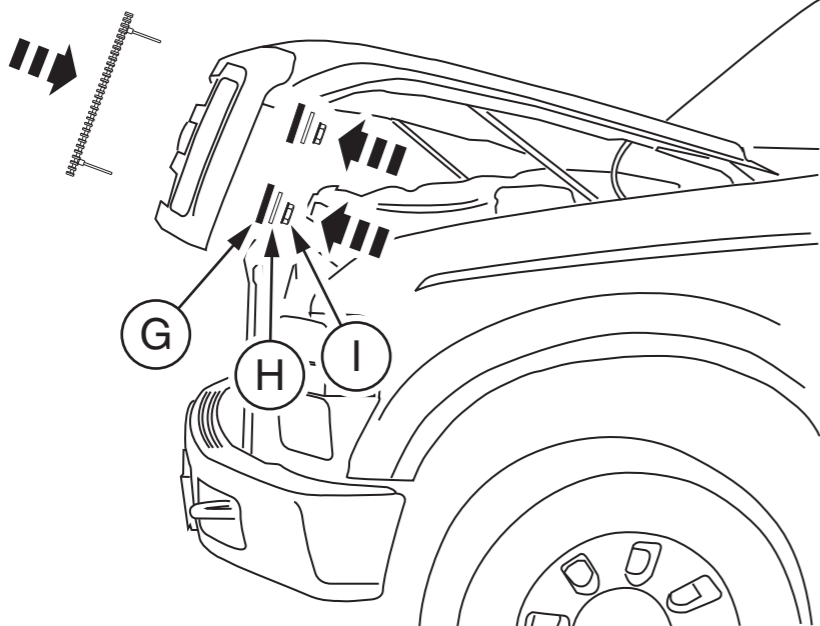

2

Make sure everything is secure and close the hood.

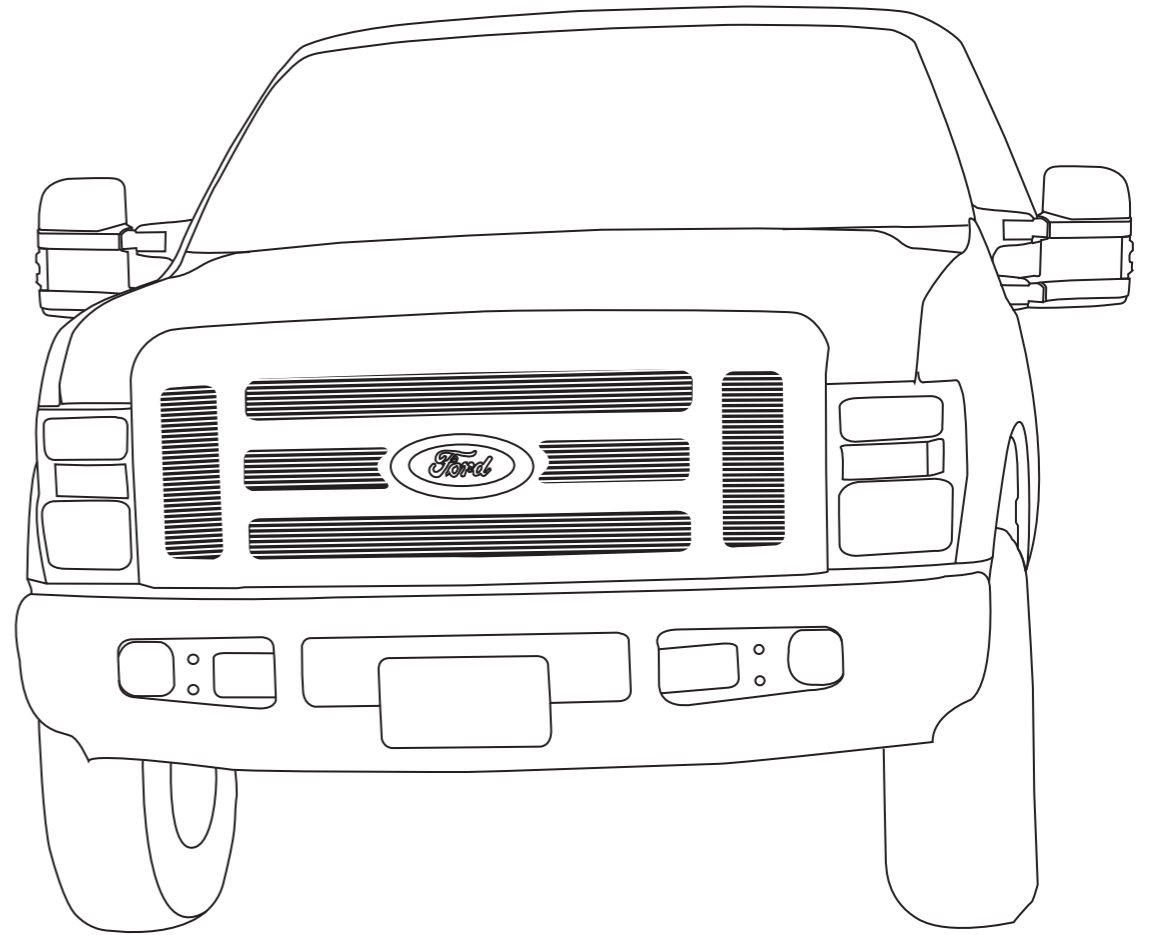

3