

INSTALLATION INSTRUCTIONS FOR PART 99-3527

APPLICATIONS Pontiac Grand Prix 2004-2008

99-352


KIT FEATURES


- DIN Head Unit Provision with Pocket
- ISO DIN Head Unit Provision with Pocket




KIT COMPONENTS

(A) Radio Housing • (B) Trim Plate • (C) ISO Brackets







WIRING AND ANTENNA CONNECTIONS (Sold Separately)

Wire harnesses:

GMOS-01 GM interface 2002-up GMOS-04 GM amplified interface 2002-up Antenna adapter:

• 40-GM10 - GM antenna adapter 1988-up

TOOLS REQUIRED:

Phillips Screwdriver • Socket Wrench







71-800-221-0932



www.metraonline.com

99-3527

TABLE OF CONTENTS

Dash Disassembly	
2004-2008 Pontiac Grand Prix	. 1
Kit Assembly	
DIN Head Unit Provision with Pocket	. 2
ISO DIN Head Unit Provision with Pocket	. 3
Final Assembly	. 4




KNOWLEDGE IS POWER Enhance your installation and fabrication skills by

enrolling in the most recognized and respected mobile electronics school in our industry.


Log onto www.installerinstitute.com or call 800-354-6782 for more information and take steps toward a better tomorrow.

PONTIAC GRAND PRIX 2004-2008


- Disconnect the negative battery terminal to prevent an accidental short circuit.
- 2 Remove bezel from around key cylinder. (Figure A)



B

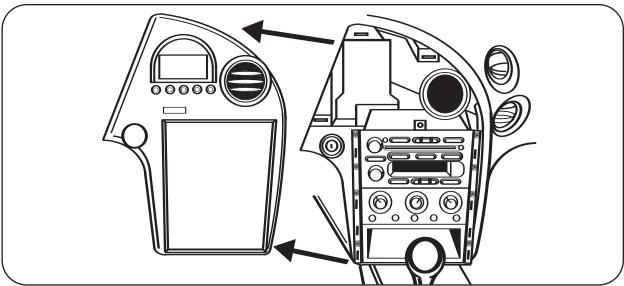


- 3 Unclip and remove entire panel surrounding radio including message center and vents. (Figure B)
- To remove radio start at bottom of stack and remove (8) 9/32" screws from pocket, climate control, and radio (4) on each side). (Figure C)






PONTIAC GRAND PRIX 2004-2008 DIN HEAD UNIT PROVISION

- 1 Slide the DIN cage into the Radio Housing and secure by bending the metal locking tabs down. (Figure A)
- 2 Slide the aftermarket head unit into the cage and secure. (Figure B)









PONTIAC GRAND PRIX 2004-2008 ISO DIN HEAD UNIT PROVISION

- 1 Mount the ISO brackets to the radio with the screws supplied with the unit. (Figure A)
- 2 Slide the head unit into the radio opening until the side clips engage. (Figure B)
- 3 Snap the trim plate into the radio housing. (Figure B)






99-3527

FINAL ASSEMBLY

- 1 Locate the factory wiring harness in the dash and make the connection as shown. Metra recomends using the proper mating adapter and making the connections as shown. (Isolate and individually tape off the ends of any unused wires to prevent electrical short circuit.)
- **2** Re-connect the negative battery terminal and test the unit for proper operation.
- 3 Reassemble radio and dash assemblies in reverse order of disassembly.

FINAL WIRING CONNECTIONS

Make wiring connections using the EIA color code chart shown below and the instructions included with the head unit. Metra recommends making connections as shown below; Strip, Splice, Solder, Tape. Isolate and individually tape off ends of any unused wires to prevent electrical short circuit.



- A) Strip wire ends back 1/2"
- B) Twist ends together
- C) Solder
- D) Tape

METRA / EIA WIRING CODE

12V Ignition / Acc Red	Right Front (+) Gray
12V Batt / Memory Yellow	Right Front (-) Gray / Black
Ground Black*	Left Front (+) White
Power Antenna Blue	Left Front (-) White / Black
Amp Turn-On Blue / White	Right Rear (+) Violet
Amp Ground Black / White	Right Rear (-) Violet / Black
Illumination Orange	Left Rear (+) Green
Dimmer Orange / White	Left Rear (-) Green / Black

^{*}NOTE: When a Black wire is not present, ground radio to vehicle chassis. All colors may not be present on all leads due to manufacturer's specifications.



99-3527

NOTES

INST993527





1-800-221-0932 www.metraonline.com