


## INSTALLATION INSTRUCTIONS FOR 15790

## 03' Dodge Ram 2500 Hemi 5.7L Quadcab - Longbed / Shortbed

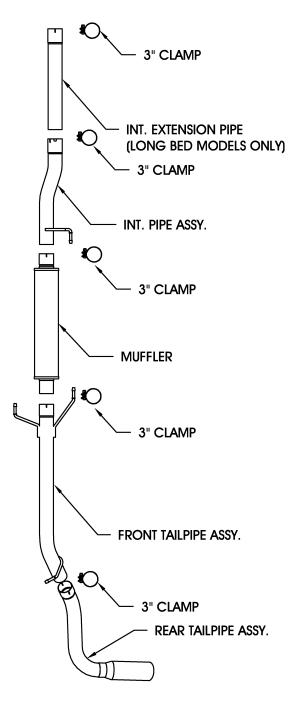

Warning: When working on under or around any vehicle exercise caution. Please allow the vehicle's exhaust system to cool before removal, as exhaust system temperatures may cause severe burns. If working without a lift, always consult vehicle manual for correct lifting specifications. Always wear safety glasses and ensure safe work area. Serious injury or death could occur if safety measures are not followed.

## Step 1: (Carefully read all instructions

before installation) Remove the OEM exhaust system by unbolting the OEM clamps and by disengaging the welded hangers from the OEM rubber insulators. Do not discard the OEM fasteners, or damage the OEM rubber insulators, as they may be reused to mount the new system.

**Step 2:** Begin installation of the new system at the catalytic converter connection. If you have a Long-Bed model, you will need to use the extension pipe as shown. Install the intermediate pipe(s) with the supplied 3.00" clamps, and by fitting the welded hangers into the OEM rubber insulator. Leave all clamps and fasteners loose for final adjustment of the complete system. Install the Front Tailpipe Assy. by inserting the hanger into the OEM rubber insulators, using suppled 3" clamp slide tailpipe over the outlet end of the muffler and loosely tighten. Install Rear Tailpipe Assy. with supplied 3" clamp connect the tailpipe together.

**Step 3:** With all components mounted loosely, adjust the system for overall aesthetics and clearance of frame & bodywork. (MAGNAFLOW recommends at least 1/2" of clearance between the exhaust system and any body panels to prevent heat-related body damage or fire.)

**Step 4:** Once a final position has been chosen for the new system, evenly tighten all fasteners from front to rear. Inspect all fasteners after 25-50 miles of operation and retighten if necessary.

\*MAGNAFLOW Performance Exhaust recommends professional installation on all their products

Technical support: 1-800-959-9226 ext. 4500