


1987-1993 FORD MUSTANG GT - 8CYL 5.0L

***Warning:** When working on under or around any vehicle exercise caution. Please allow the vehicle's exhaust system to cool before removal, as exhaust system temperatures may cause severe burns. If working without a lift, always consult vehicle manual for correct lifting specifications. Always wear safety glasses and ensure safe work area. Serious injury or death could occur if safety measures are not followed.*

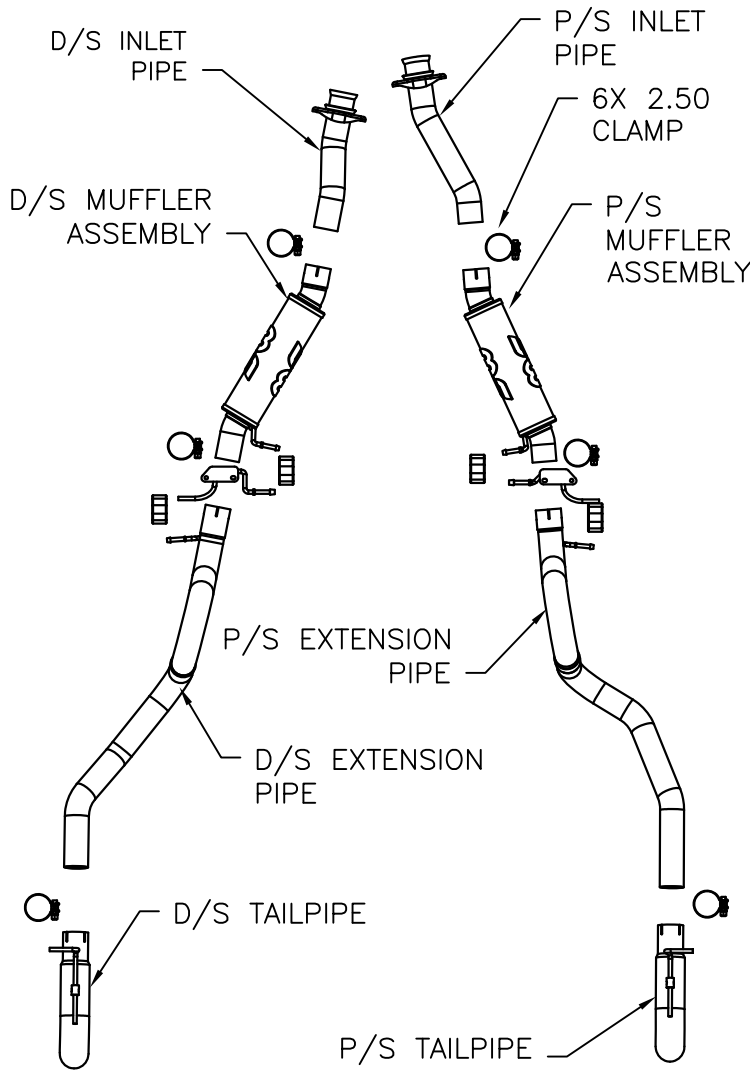

Step 1: To begin removal of your OEM exhaust system, you will need to cut the tail-pipes just behind the mufflers. Remove the tail pipes from the OEM rubber insulators. Do not damage the OEM rubber insulators, as they will be re-used with your new system. Next unbolt the extension pipes from the H-pipe and remove the mufflers from their OEM rubber insulators. Do not discard the fasteners required to bolt the extension pipes to the mufflers, as they will be re-used.

Step 2: Remove the existing muffler mount brackets, and replace them with the new brackets supplied in the kit. Do not discard the OEM mount fasteners, as they will be re-used.

Step 3: Starting at the H-pipe, begin installing your new exhaust system by bolting up the Inlet Pipes with the flanges supplied in the kit and the OEM fasteners. Leave all components loose until a final position has been set. Working rearward, install the Muffler Assemblies, Extension Pipes and Tailpipes using the supplied clamps. Then install the polished tips using the supplied clamps hangers and set-screws.

Step 4: Adjust all components for clearance of the frame, bodywork, and overall aesthetics. (MAGNAFLOW recommends at least 1/2" of clearance between the exhaust tips and the rear fascia to avoid heat related body damage or fire.) Once a final position has been chosen for the new system, evenly tighten all fasteners from front to rear. The supplied band clamps for the tips must be VERY tight to properly align the pipes and prevent leaks (Approximately 40ft-lbs). U-bolt clamps should be tightened to approximately 30-35ft-lbs. Inspect all fasteners after 25-50 miles of operation and retighten if necessary.

**MAGNAFLOW Performance Exhaust recommends professional installation on all their products*

Technical support: 1-800-959-9226 ext. 4500

MAGNAFLOW Performance Exhaust - 22961 Arroyo Vista - Rancho Santa Margarita, CA 92688

16995 2/26/16 REV 002