

DUALLY

FLUSH MOUNT INSTRUCTIONS

Thank you and congratulations on purchasing a Flush Mount Dually LED Light! With Rigid Industries patented "Hybrid Optics", the Dually rises above the competition in efficiency and projection. Your new light is a true example of the highest in LED lighting technology. Thank you for supporting Rigid Industries, enjoy your new light!

Fuse Chart

Light	Dually	Dually (Pair)
Amps	5	5

In The Box:

- Light
- Hardware
- Wiring
- Gasket
- Instructions & Template


RIGIDINDUSTRIES.COM



The Flush Mounted Dually allows for a wide range of mounting options with the light embedded into the surface of your application. Unlike the normal Dually, this does not include a rear bracket, which means the angle of the light beam depends on the surface it is mounted to. The Dually is 3 3/16" in depth and you will need to be sure your surface will allow the light behind it. Continue to follow instructions on the template card.

After light is installed, begin wiring harness installation. Attach red terminal eyelet to battery positive. Secure black terminal eyelet to a suitable ground or battery negative. Route harness to desired switch and mounting locations, secure with zip ties. Beware of sharp edges, abrasive surfaces and heat sources when routing wires. Swap red wires if indicator light remains on at first.

Rigid Industries LED Lights have a variable voltage input range of 9-36 DC. If required, be sure to use an adequate relay that corresponds to your system. When installing multiple lights, fusing should be adjusted to match. Test your new light to ensure proper operation. Call 480-655-0100 for support.

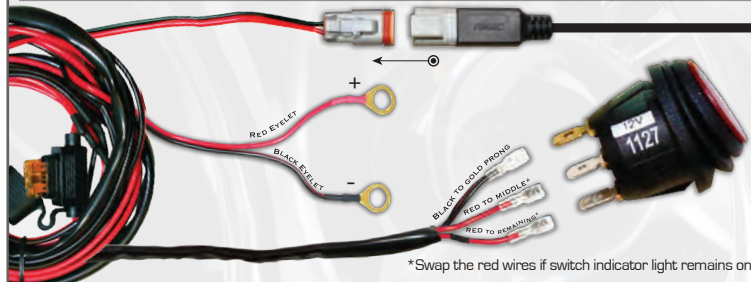

*Swap the red wires if switch indicator light remains on

* Rigid Industries highly recommends using a certified professional to install and wire your light.

* Only install light onto flat surface

- 1) Cut out only the dotted areas, including the four outside holes.
- 2) Ensure your flat surface allows for 3 3/16" x 3 3/16" of depth.
- 3) Tape the template, or secure by other means, to your surface.
- 4) Mark all four drill holes and center area of template with marker.
- 5) Remove your template and double check your markings by placing rubber gasket over area. Adjust accordingly.
- 6) After complete check is done to ensure proper alignment, remove marked surface material by using pneumatic tools.
- 7) Remove or file down rough edges and excess trimmings to allow for light to correctly be placed inside.
- 8) Place gasket over light so it rests behind the face of the flush mounted light. Insert light into opening.
- 9) Insert your 4 bolts into light and through your surface, tighten nuts onto bolts evenly to allow for a proper gasket seal.
- 10) Wire light according to provided instructions.

Drill Holes to
5/16"

Drill Holes to
5/16"