

DUALLY D2

M-SERIES INSTRUCTIONS



THANK YOU AND CONGRATULATIONS ON PURCHASING AN M-SERIES DUALLY D2 WITH RIGID'S PATENTED "HYBRID OPTICS", THE DUALLY RISES ABOVE THE COMPETITION IN EFFICIENCY & PROJECTION. YOUR NEW LIGHT IS A TRUE EXAMPLE OF THE HIGHEST IN LED LIGHTING TECHNOLOGY. THANK YOU FOR SUPPORTING **RIGID INDUSTRIES** AND ENJOY YOUR NEW LED LIGHT!


IN THE BOX:

- A = M6 NYLON LOCKNUTS (2)
- B = MOUNTING BRACKET
- C = M6 ALLEN BOLT (2)
- D = DUALLY
- CARRIAGE BOLT
- CARRIAGE WASHER
- 5/16" CARRIAGE NUT

RIGIDINDUSTRIES.COM

FUSE CHART

LIGHT	DUALLY D2	DUALLY D2 (PAIR)
AMPS	10	15

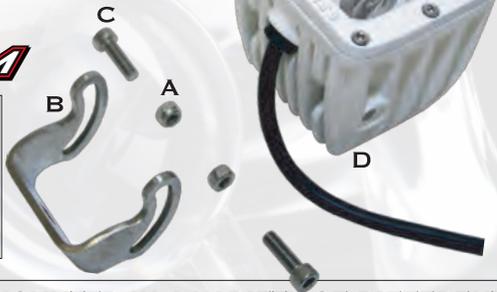

THE MARINE DUALLY CAN BE MOUNTED IN A VARIETY OF DIFFERENT LOCATIONS. INSTALLATION WILL VARY DEPENDING ON THE LOCATION YOU'RE MOUNTING TO. FOR GENERAL PURPOSES, YOU WILL NEED TO FIRST INSERT THE MOUNTING BRACKET INTO THE SLOTS OF THE LIGHT, AS SHOWN IN THE PICTURE. INSERT M6 NYLON LOCK NUTS INTO CAVITIES IN HOUSING. INSERT M6 ALLEN BOLTS INTO HOLES IN HOUSING, CAPTURING NYLON LOCKNUTS. SNUG SLIGHTLY AND MOUNT LIGHT USING CARRIAGE BOLT, WASHER AND NUT SYSTEM. WAIT TO SECURE ALL NUTS UNTIL YOU HAVE YOUR LIGHT WORKING AND IN A DESIRED POSITION.



WIRING THE DUALLY IS AS SIMPLE AS WIRING INTO ANY EXISTING 12-36VDC POWER SOURCE. IF INSTALLING NEW WIRING, BEWARE OF SHARP EDGES, ABRASIVE SURFACES AND HEAT SOURCES. IT IS RECOMMENDED THAT YOU USE A FUSE (SEE CHART ABOVE) TO PROTECT AGAINST THE POSSIBILITY OF A POWER SURGE. RED WIRE TO POSITIVE, BLACK TO CHASSIS GROUND OR BATTERY NEGATIVE.

FOR MORE INFORMATION, OR FOR QUESTIONS REGARDING INSTALLATION, VISIT OUR WEBSITE OR CALL US AT:

480-655-0100

