



INSTALLATION INSTRUCTION ATV WINCH MOUNT

Mount Kit: PN 60170, PN 60274

Application: YAMAHA KODIAK 4x4, 00+

Your safety, and the safety of others, is very important. To help you make informed decisions about safety, we have provided installation and operating instructions and other information on labels and in this guide. This information alerts you to potential hazards that could hurt you or others. It is not possible to warn you about all potential hazards associated with this product, you must use your own good judgment.

CARELESS INSTALLATION AND OPERATION CAN RESULT IN SERIOUS INJURY OR EQUIPMENT DAMAGE. READ AND UNDERSTAND ALL SAFETY PRECAUTIONS AND OPERATING INSTRUCTIONS BEFORE INSTALLING AND OPERATING THIS PRODUCT.

This guide identifies potential hazards and has important safety messages that help you and others avoid personal injury or death.

WARNING and **CAUTION** are signal words that identify the level of hazard. These signal words mean:

WARNING signals a hazard that could cause serious injury or death, if you do not follow recommendations.

CAUTION signals a hazard that may cause minor to moderate injury, if you do not follow recommendations.

This guide uses **NOTICE** to call attention to important mechanical information, and **Note**: to emphasize general information worthy of special attention.

WARNING

SEVERE INJURY OR DEATH MAY RESULT IF YOU IGNORE ANY OF THE FOLLOWING.


- **Read the Winch Operator’s Manual, ATV Operator’s Manual, and all warning labels before operating the winch and ATV.**
- **Stay clear of moving parts and cable. Keep others away when operating the winch.**
- **Inspect the winch mechanism, fasteners, and cable, before operating. Replace all worn or damaged parts before operating.**
- **Make sure the winch is deactivated when leaving the ATV unattended.**



PARTS LIST:

<u>PART NO.</u>	<u>QUANTITY</u>	<u>DESCRIPTION</u>
60169	1	Mounting plate
34402	4	8MM x 1.25 x 20MM hex head cap screw
13455	2	8MM x 1.25, hex nuts
1324	4	5/16 flat washers
1402	4	5/16 lock washer

INSTRUCTIONS:

1. Attach winch mounting Plate to the ATV using the four 8mm hex bolts, lock washers and flat washers. It may be helpful to remove the front skid pan. The mounting plate will be sitting at an angle in the ATV frame. The bottom two mounting tabs with slots will align with the two threaded holes at the ends of the frame rails. The top two mounting slots will align with the two mounting bosses that are welded on the bumper frame tubes.
2. Attach the cast hawse or the roller fairlead to the mounting plate. If using the cast hawse fairlead (black), it may be necessary to remove it from the black "L" shaped mounting bracket that came with the winch. Using the same hardware to attach the cast hawse fairlead to the mounting plate. Two 7/16 socket head cap screws, lock washers and hex jam nuts. If a roller fairlead was purchased or included in the kit, attach it to the mounting plate with the hardware that came with the roller. Two 3/8 hex head cap screws, lock washers, and jam nuts.
3. Place winch onto the mounting plate as pictured and attach with the four 5/16 hex head cap screws and lock washers.
4. Tighten all fasteners securely at this time.
5. Make all electrical connections using the winch manual that came with the winch.

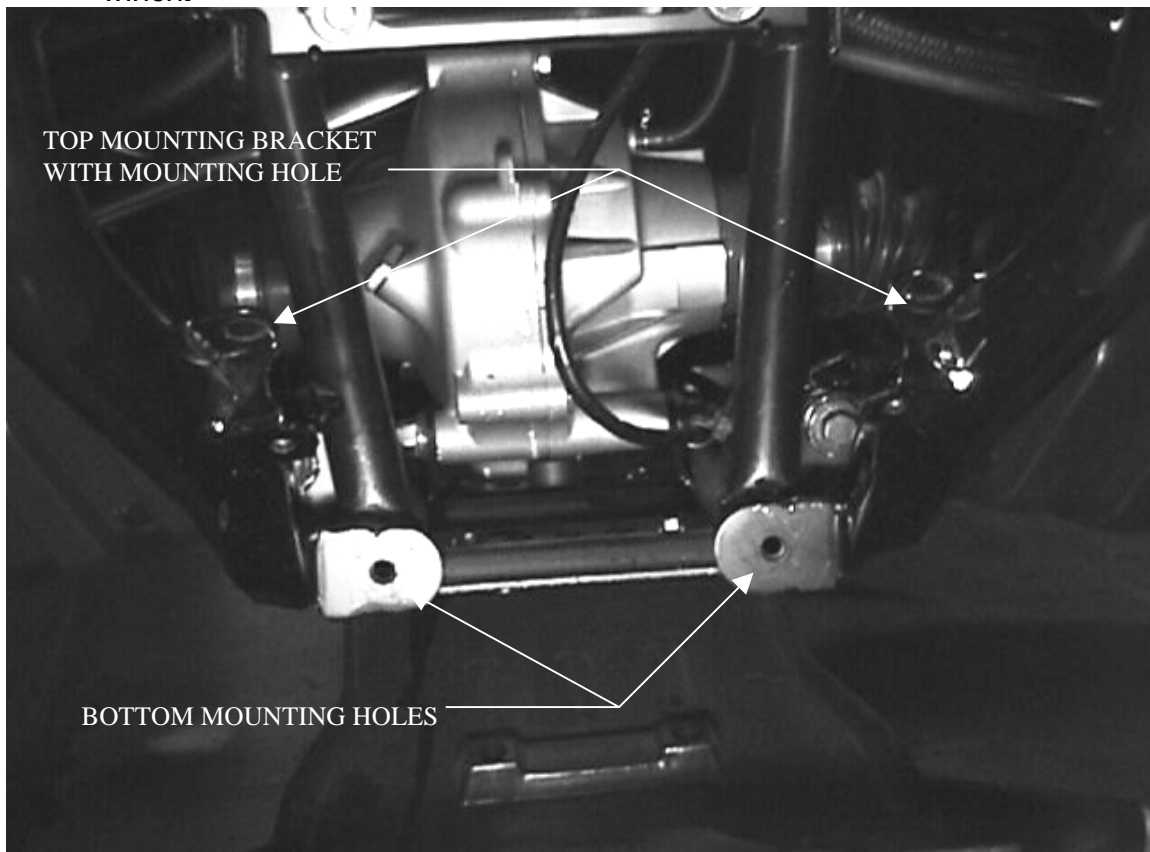

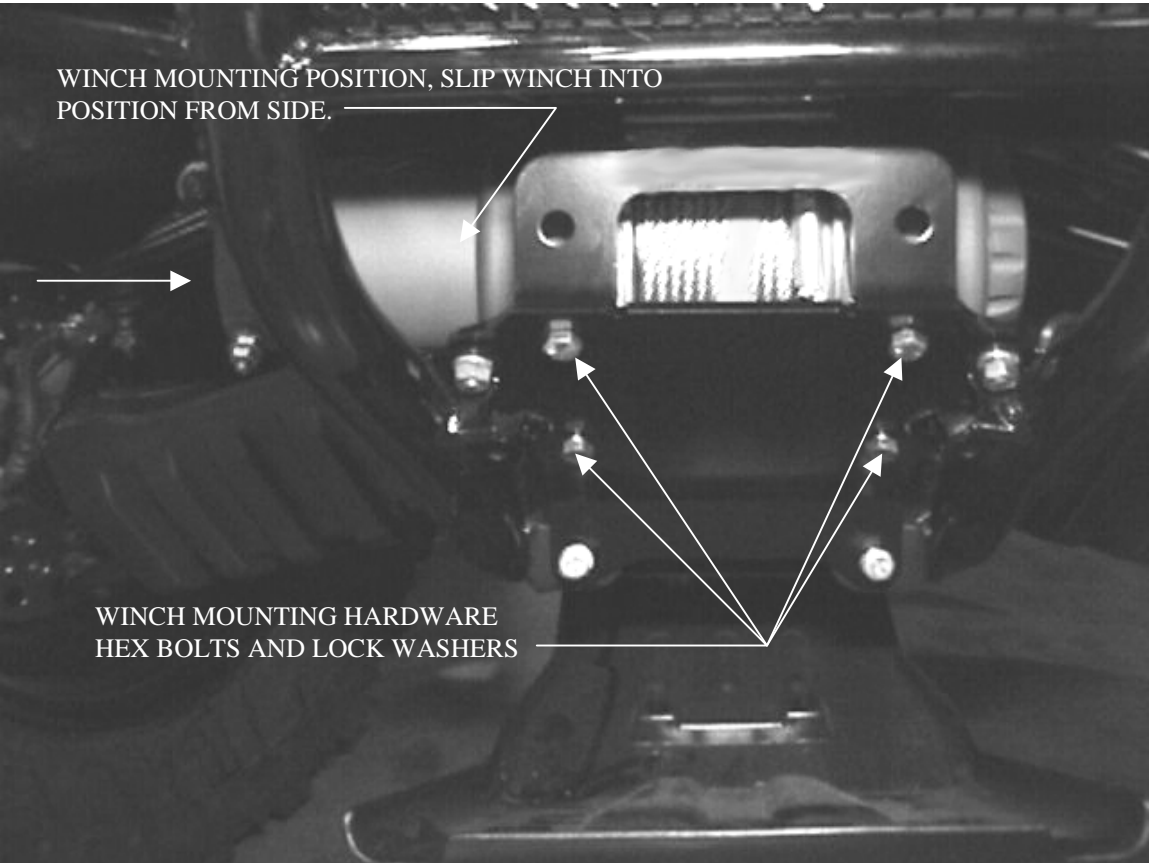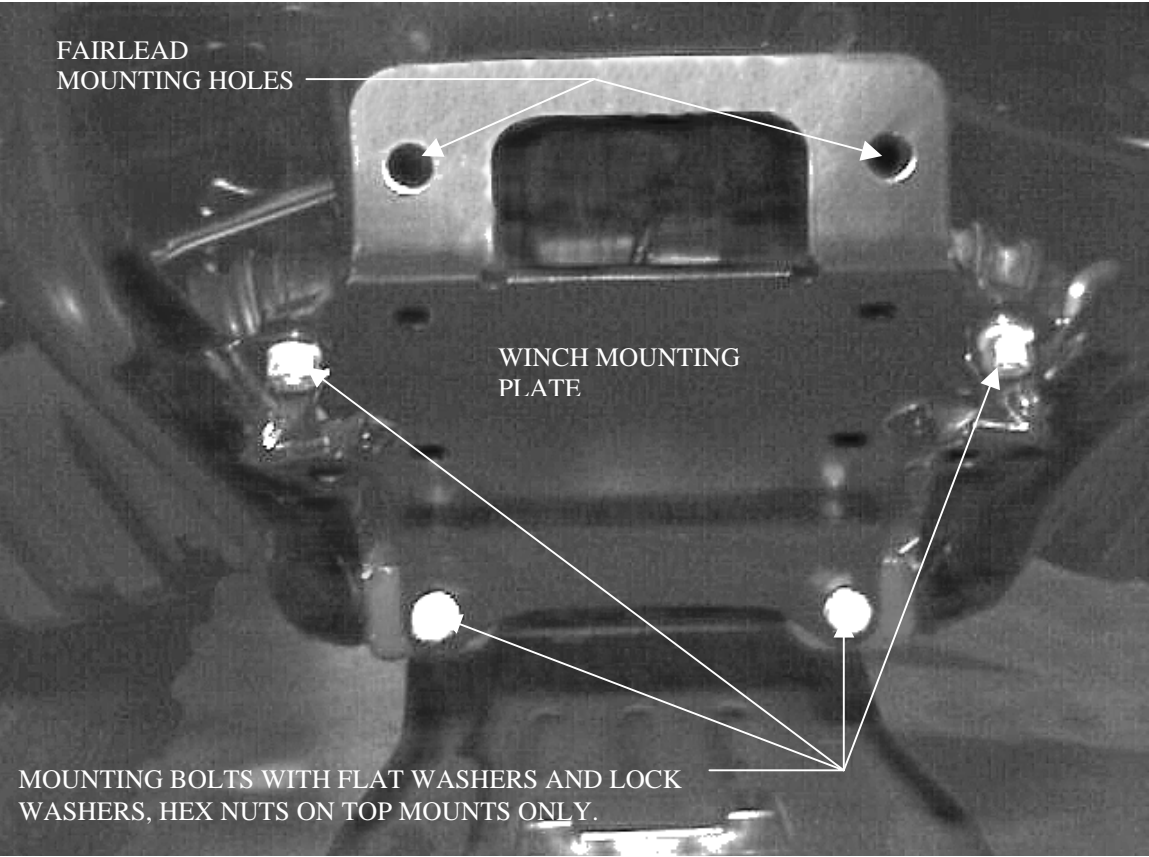

6. Suggested location for the safety contactor is on the outer left side of the storage compartment, just above the frame tube or inside the storage box.
7. Following is the suggested under seat routing for the power and ground connections. Run the power wire from the positive terminal on the battery, left across the rear of the battery, under the red main power cable, through the cable routing dividers, and out to the contactor through the hole in the plastic just to the left of the cable routing dividers. The ground wire may be run from the negative terminal on the battery, forward under the cables crossing to the routing dividers, under the metal cross brace, and out to the contactor through the hole in the plastic just forward of the left side of the metal cross brace.

