

After




HARDWARE

10 - Toggle Bolt assemblies

Attach toggle bolt assemblies to all mounting tabs according to the diagram below. Then simply place billet grille into opening and center, align toggles with corresponding holes in “egg crate” of stock grille shell and push thru. Then tighten the toggles without over tightening, over tightening will can cause the grille shell to crack.

See Diagram below for a Reference

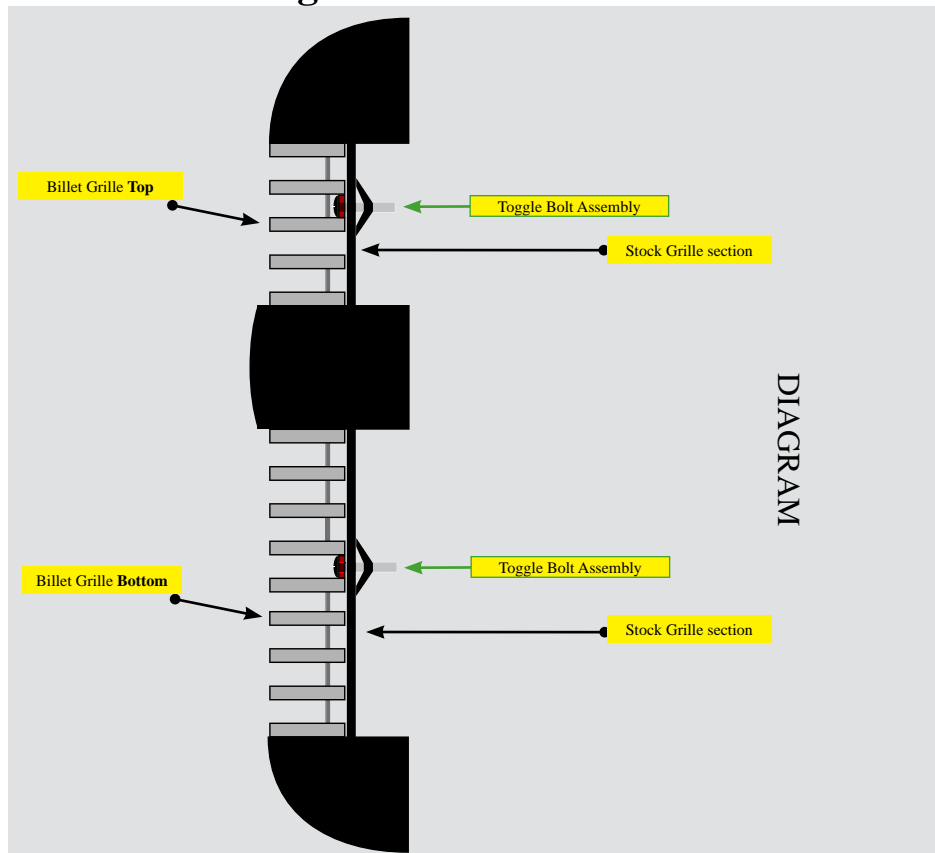

For installation of billet grilles that require cutting of the stock shell, proper tools, knowledge and skill are needed. Westin is not responsible for care & accuracy of the installation, only for Fit & Finish of its products. Use a qualified installer or contact original vendor for references to complete all instructions.

NOTE: Please adjust horizontal blades if irregular. This is the result of shipping and handling outside of Westin’s control. Also Westin Recommends applying a high quality automotive wax to maintain the original appearance.