



Installation Instructions

Tail Light Guard P/N#39-3270/39-3275

02-05 Ford Explorer – 4Dr Excl. Sport

Part List:

Item number	Description	Quantity
1	Light Guard	2
2	Support Brackets	2
3	M4 X 10mm Phillips Machine Screws	2
4	M4 Flat Washer	2

Note: Please protect the product from being scratched during the installation process.

Step One: Locate Hardware and check contents with hardware listed above. Read instructions completely before beginning.

Step Two: Remove the factory taillight screws (**See Figure 1**). Carefully unfasten clips and remove Taillight. **NOTE:** Save screws for later use.

Step Three: Engage the Support Bracket and hold it in place (**See Figure 2**). While holding the Support Bracket, carefully reinstall the Taillight and fasten factory clips (**See Figure 3**).

Step Four: Position the Taillight Guard onto vehicle and loosely attach Taillight Guard to Support Bracket by using (1) M4 X 10mm Phillips Screw and, (1) M4 Flat Washer (**See Figure 4**).

Step Five: Align the Taillight Guard mounting tabs to factory mounting holes. Use factory screws removed in step one to attach mounting tabs to the vehicle (**See Figure 5**). **NOTE:** Carefully open and close rear door to make sure the Taillight Guard does not interfere with rear door. Tighten all hardware at this time. Repeat Step 2-5 for opposite side.

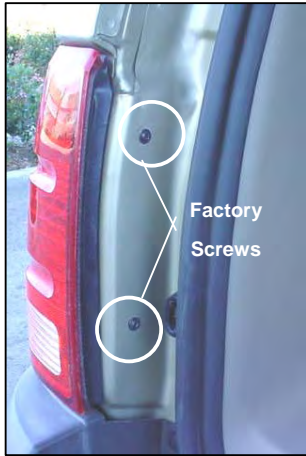


Figure 1



Figure 2



Figure 3

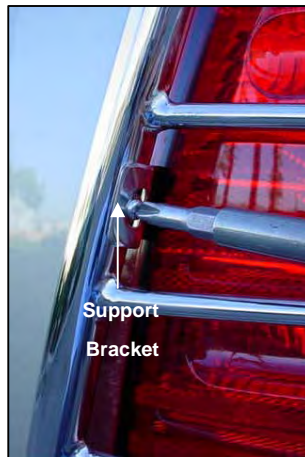


Figure 4



Figure 5



Westin Automotive Products, Inc.
5300 N. Irwindale Ave. Suite 220
Irwindale, Ca. 91706

Thank You for choosing Westin products
For additional installation assistance please call
Customer service (800) 793-7846 or (507) 375-3559