



Completely read all the instructions before installation  
Improper installation will void warranty!

### Step 1




**Tools needed:**  
10mm Socket  
Trim Pin Remover  
Phillips Screw Driver

### Step 2



Remove the four phillips screws  
on the third brake light housing

### Step 3

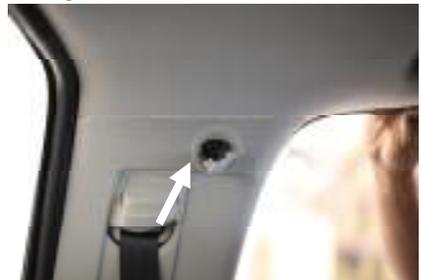

Open the cap directly above the sea  
belt holster to separate the inner  
lining panel

### Step 4



Remove the rubber molding  
surrounding the rear door frame

### Step 5



Separate the lower inner lining  
panel from the upper inner lining  
panel

### Step 6



Remove the 10mm bolt located at  
the bottom of the upper inner lining  
panel

### Step 7



Remove the upper inner lining panel

### Step 8



Separate the ceiling lining panel by  
pulling down the attached plastic  
screw pins

### Step 9



Remove the two 10mm bolt located  
directly behind the third brake  
light housing

### Step 10



Remove the third brake light by disconnecting the power source and the three light bulb harnesses

### Step 11



Install the Anzo third brake light by reversing the steps 2 to 10

### Step 12



Test all functions before operating the vehicle

*AnzoUSA™ products are covered, by a limited one (1) year warranty, to be free of manufacturer's defects. However, certain AnzoUSA™ product categories have warranty policies which differ from this standard, please contact your representative for detailed category information. Damage due to improper installation or road hazards is not covered. Seller and manufacturers' only obligations shall be to replace the product proven to be defective. Neither seller nor manufacturer shall be liable for any injury, loss or damage, direct or consequential, arising out of the use of or the inability to use the product. Before using, user shall determine the suitability of the product for its intended use, and user assumes all risk and liability whatsoever in connection therewith.*

© 2008 AnzoUSA™. All rights reserved.

