

INSTALLATION MANUAL

2070

Level of Difficulty

Difficult

Installation difficulty levels are based on time and effort involved and may vary depending on the installer level of expertise, condition of the vehicle and proper tools and equipment.

Parts List

| Qty | Description |
|-----|-------------------------------------|
| 1 | Grille guard |
| 1 | Mounting bracket, driver-side |
| 1 | Mounting bracket, passenger-side |
| 1 | Support bracket, driver-side |
| 1 | Support bracket, passenger-side |
| 10 | Lock washer, 10mm |
| 6 | Hex bolt, 10 - 1.5mm x 35mm |
| 18 | Flat washer, 10mm |
| 10 | Hex nut, 10mm |
| 2 | Bolt plate, 10-1.5mm x 35mm |
| 2 | PVC clip |
| 2 | Button-head bolt, 10 - 1.5mm x 35mm |

Tools Required

| | |
|--------------|-------------------|
| Ratchet | Socket extensions |
| Socket, 15mm | Metric wrenches |


Product Registration and Warranty

ARIES stands behind our products with industry-leading warranties. To get copies of the product warranties, register your purchase or provide feedback, visit: warranty.curtgroup.com/surveys

Product Photo



Mounting Hardware

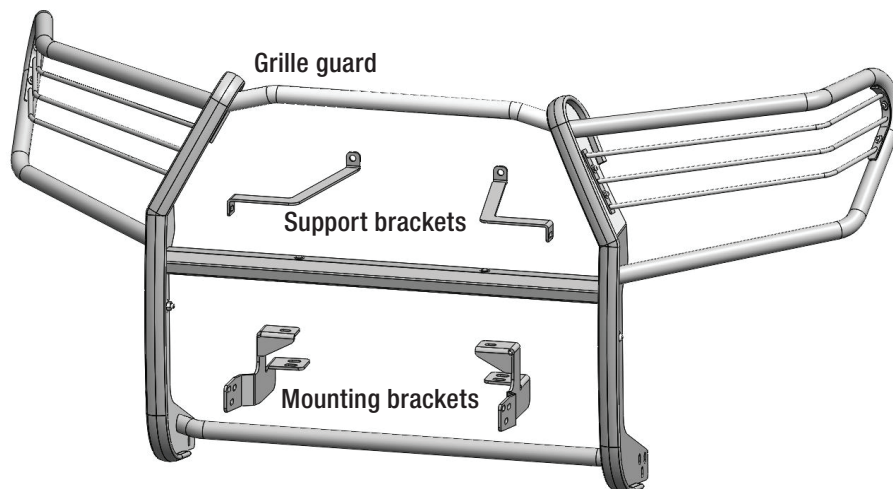


Maintenance


Mild automotive detergent may be used to clean the product. Do not use dish detergent, abrasive cleaners, abrasive pads, wire brushes or other similar products that may damage the finish.

1


Follow (Fig 1 – 7) to remove front clip from vehicle, then remove shutter veins. After, replace front clip to vehicle.

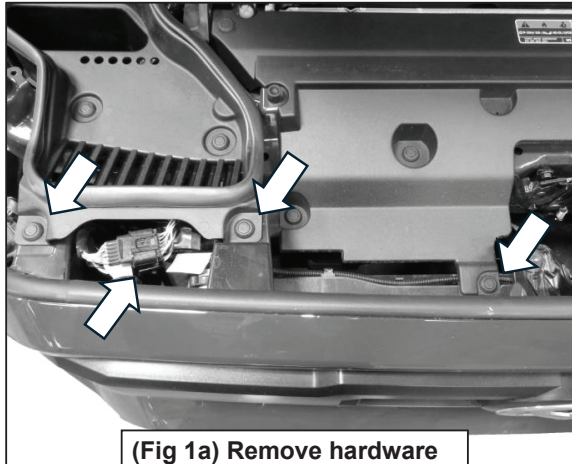

(Fig 1a) Remove hardware holding front clip to vehicle

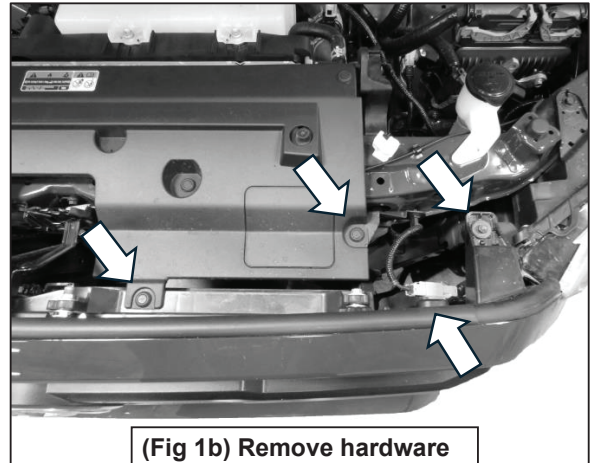


(Fig 1b) Remove hardware holding front clip to vehicle

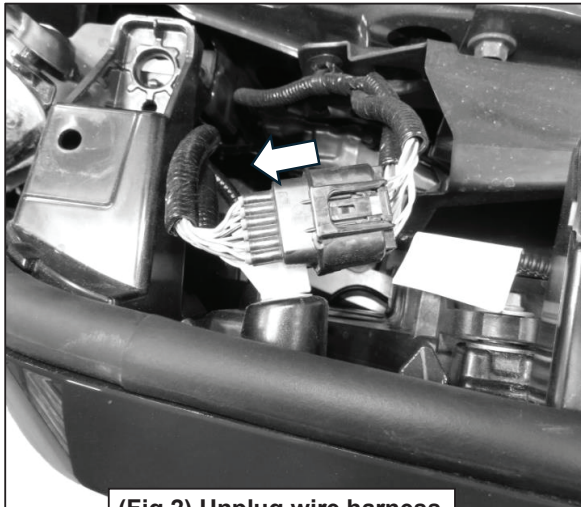


(Fig 2) Unplug wire harness




(Fig 3) Remove clips and peel wheel well liner from vehicle

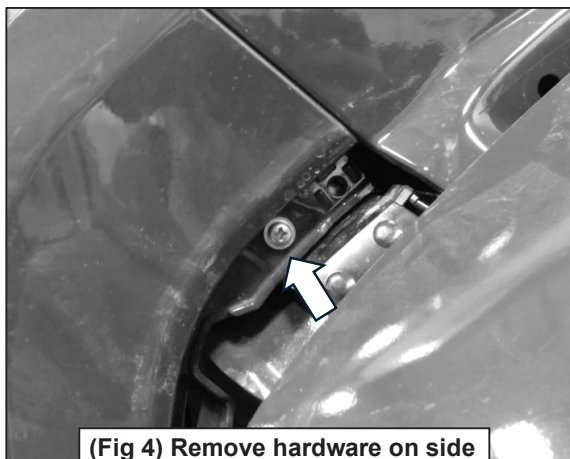


(Fig 4) Remove hardware on side of vehicle to remove front clip

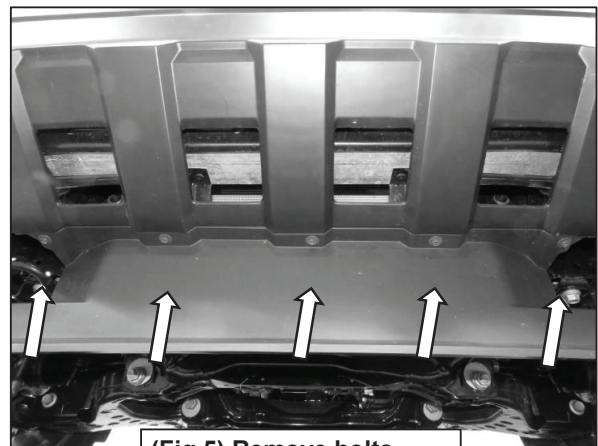

(Fig 5) Remove bolts from underneath bumper

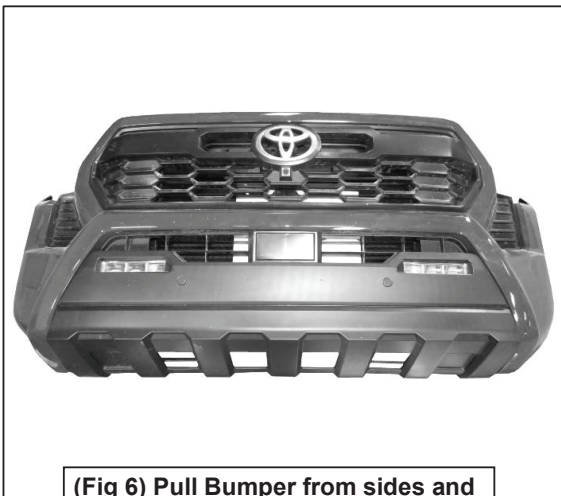


(Fig 6) Pull Bumper from sides and forward to detach from vehicle

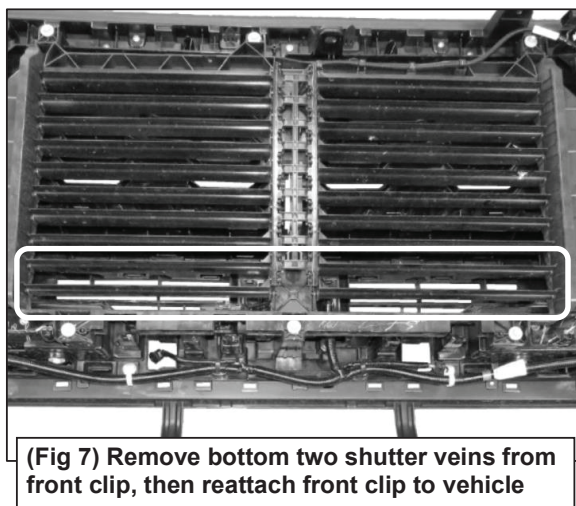


(Fig 7) Remove bottom two shutter veins from front clip, then reattach front clip to vehicle

2


Follow (Fig 8 – 19) to attach Support and Frame Mounting Brackets, then attach Grille Guard to Brackets. Complete each step on both Passenger and Driver side. Ensure all hardware is hand tightened at this point.

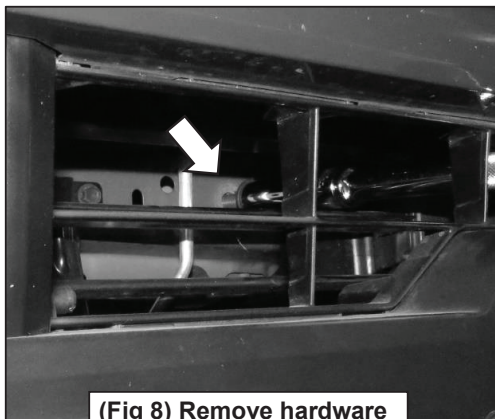


(Fig 8) Remove hardware from behind Grille

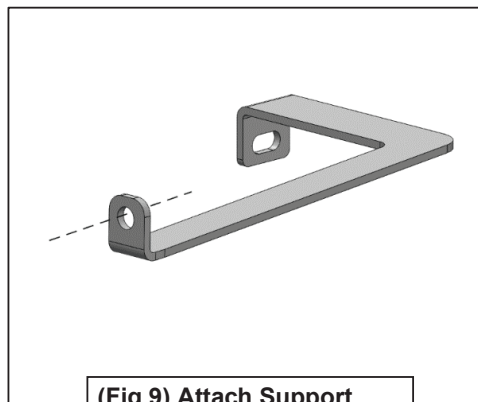

(Fig 9) Attach Support Bracket reusing hardware

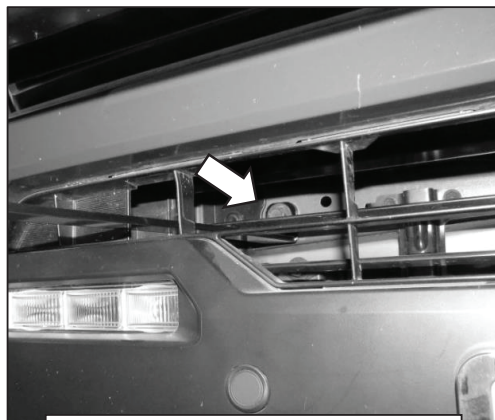


(Fig 10) Attached Support Bracket

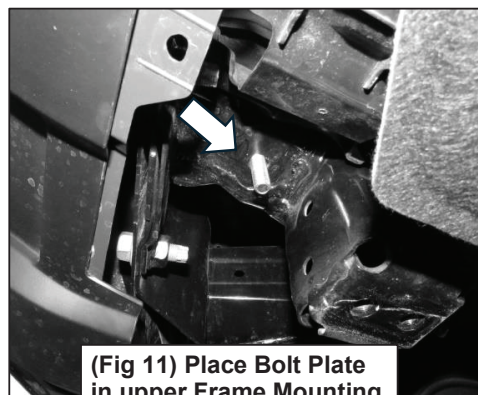


(Fig 11) Place Bolt Plate in upper Frame Mounting Bracket mounting point


- (1) 10mm Bolt Plate
- (1) Plastic Retainer
- (1) 10mm Flat Washer
- (1) 10mm Lock Washer
- (1) 10mm Hex Nut

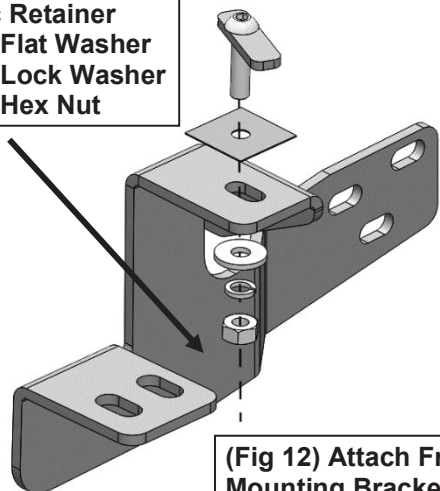


(Fig 12) Attach Frame Mounting Bracket

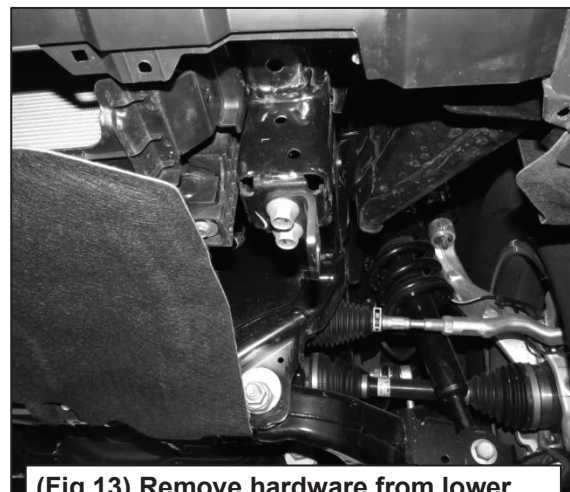


(Fig 13) Remove hardware from lower Frame Mounting Bracket mounting point

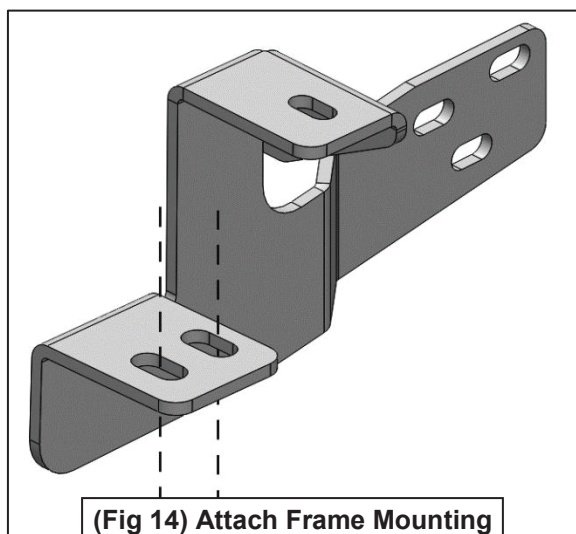

(Fig 14) Attach Frame Mounting Bracket reusing hardware

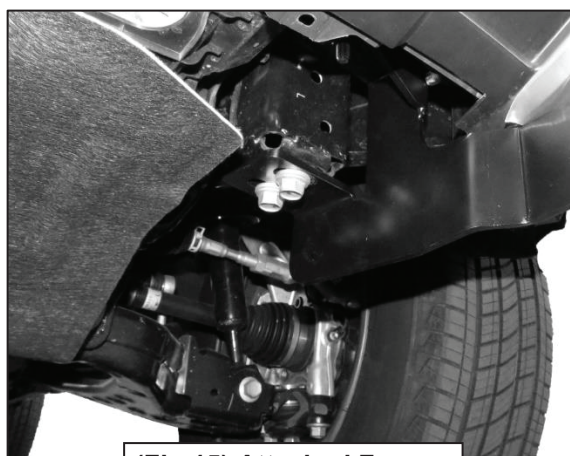

(Fig 15) Attached Frame Mounting Bracket

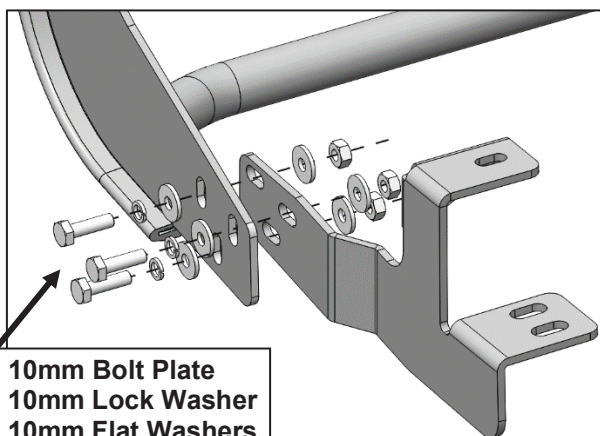


- (3) 10mm Bolt Plate
- (3) 10mm Lock Washer
- (6) 10mm Flat Washers
- (1) 10mm Hex Nut

(Fig 16) Attach Grille Guard to Frame Mounting Bracket




(Fig 17) Attached Grille Guard to Frame Mounting Bracket

- (1) 10mm Button Head Bolt
- (1) 10mm Lock Washer
- (2) 10mm Flat Washers
- (1) 10mm Hex Nut

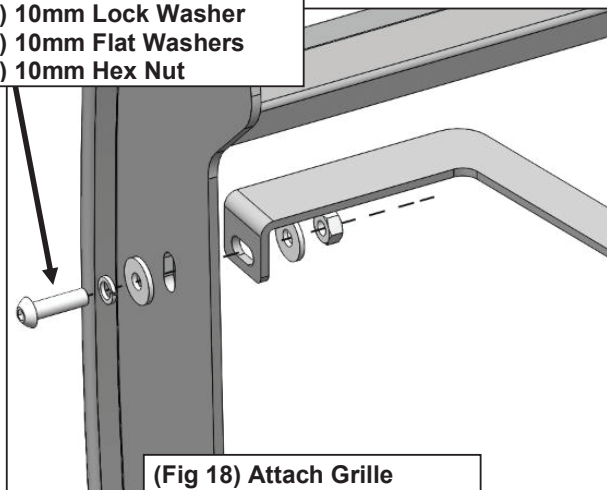

(Fig 18) Attach Grille Guard to Support Bracket

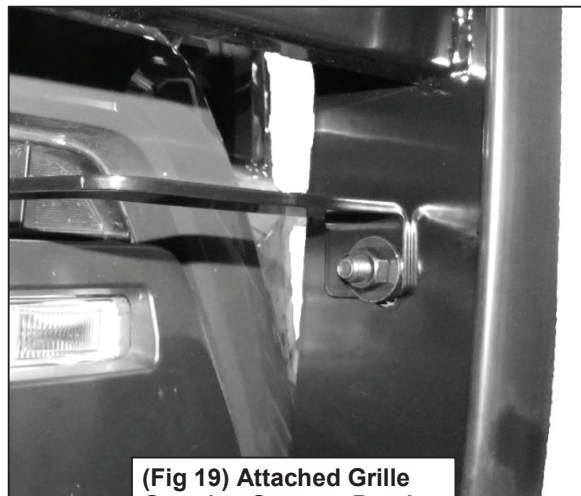

(Fig 19) Attached Grille Guard to Support Bracket

3



Complete Installation