



Installation Instructions Seat Cover, Rear Kit

Vehicle Application:
Jeep® Wrangler Unlimited JK 4-Door
2007, 2013-2018
Part Number 29284

Installation Tips

Read and follow, precisely, all installation instructions provided when installing this product. Failure to do so may result in a poor fit, and could place occupants of the vehicle in a potentially dangerous situation.

WARNING

To reduce the risk of accidental injury: Follow all vehicle Manufacturer's and Bestop® safety messages, application and installation instructions.

- Do not remove seats from the vehicle to install this product.
- Fit and maintain sides of seat cover as tight to seat as possible, always matching front to side seam of seat with similar panels and seams of seat cover.
- Remove headrest carefully to avoid damaging manufacturer's wiring. Assure all plugs are connected after installation of seat cover.
- Do not use and replace if seat cover becomes damaged or wear no longer allows tight fit to seat sides.



WEAR SEAT BELTS AT ALL TIMES

Tools	Installation Time	Support
<div data-bbox="415 1127 531 1195" data-label="Image"></div> <p data-bbox="382 1213 564 1243">Safety Glasses</p> <div data-bbox="121 1317 394 1377" data-label="Section-Header"><h3> CAUTION</h3></div> <p data-bbox="409 1317 837 1377">Safety glasses should be worn at all times when installing this product.</p>	<div data-bbox="989 1084 1121 1214" data-label="Image"></div> <p data-bbox="1129 1130 1226 1161">1 Hour</p> <div data-bbox="1045 1266 1205 1299" data-label="Section-Header"><h3>Skill Level</h3></div> <div data-bbox="963 1338 1304 1414" data-label="Image"></div> <p data-bbox="989 1430 1274 1458">2 - Moderately Difficult</p>	<p data-bbox="1520 1097 1829 1195">We're here to help! Go to: https://www.bestop.com and click on Need Help?</p> <div data-bbox="1587 1239 1766 1414" data-label="Image"></div> <p data-bbox="1476 1430 1877 1458">https://www.bestop.com/video-library</p>







Installation Instructions Seat Cover, Rear Kit

Vehicle Application:
Jeep® Wrangler Unlimited JK 4-Door
2007, 2013-2018
Part Number 29284


Parts List

- Required parts for each installation section - Page number in Installation Guide

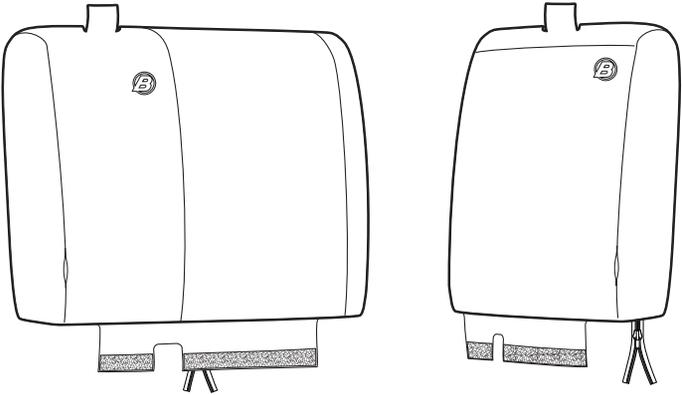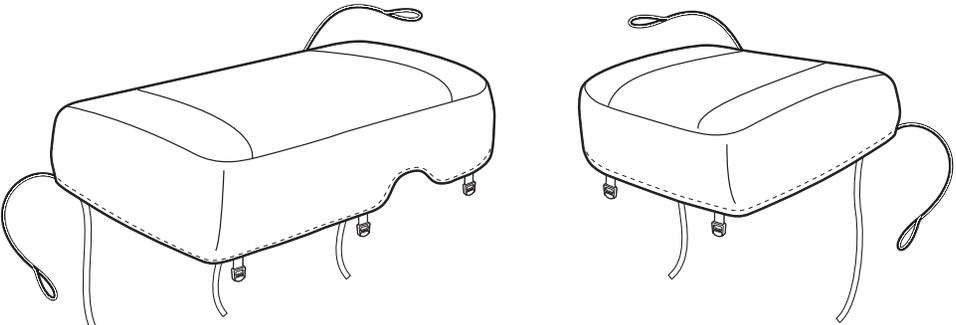Section 1	Seatback Covers	Pages 3-4	Section 2	Seat Bottom Covers	Pages 5-6
 <p data-bbox="241 792 420 889">Large Seatback Cover Qty. 1</p> <p data-bbox="655 792 833 889">Small Seatback Cover Qty. 1</p>			 <p data-bbox="1171 784 1381 881">Large Seat Bottom Cover Qty. 1</p> <p data-bbox="1619 779 1829 876">Small Seat Bottom Cover Qty. 1</p>		

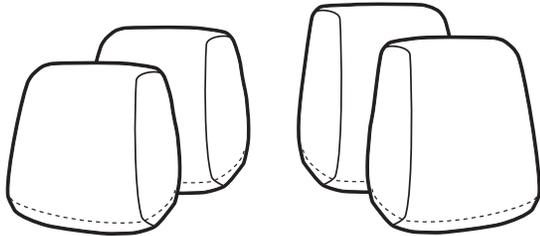Section 3	Seat Bottom Covers	Page 6	Section 3	Page 6
 <p data-bbox="491 1219 720 1317">Seat Bottom Elastic Cord S-hooks Qty. 2</p>			 <p data-bbox="1199 1323 1339 1388">2007 Vinyl Covers</p> <p data-bbox="1409 1336 1465 1369">OR</p> <p data-bbox="1541 1323 1696 1388">2013-2017 Fabric Covers</p> <p data-bbox="1367 1429 1549 1494">Headrest Covers Qty. 2 sets of 2</p>	


Step 1

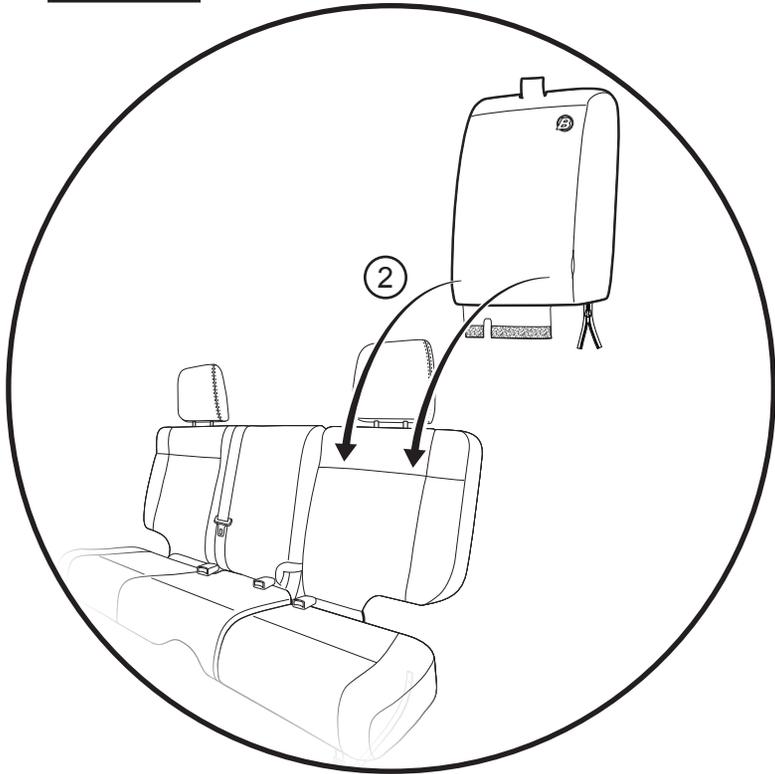

Step 1


- ① Unzip the back of the Small seatback cover.
- ② Slip the seat cover over the headrest and over the Small seatback. You will have to open the hook-&-loop hole at the top of the seat cover to allow the headrest to pass through.

Step 2

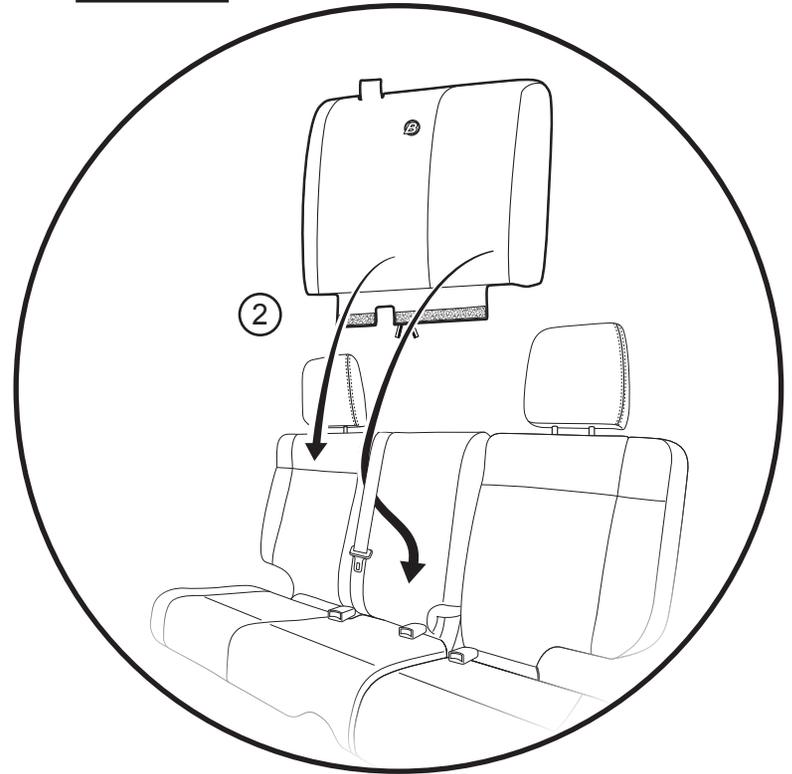


Step 2

- ① Unzip the back of the Large seatback cover.
- ② Slip the seat cover over the headrest, under the seatbelt, and over the Large seatback. You will have to open the hook-&-loop hole at the top of the seat cover to allow the headrest to pass through.

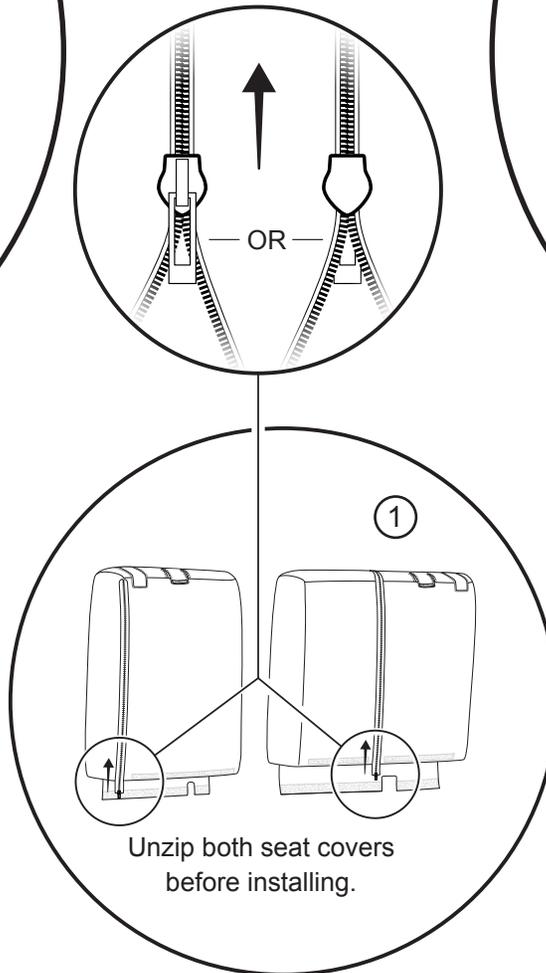

Step 1

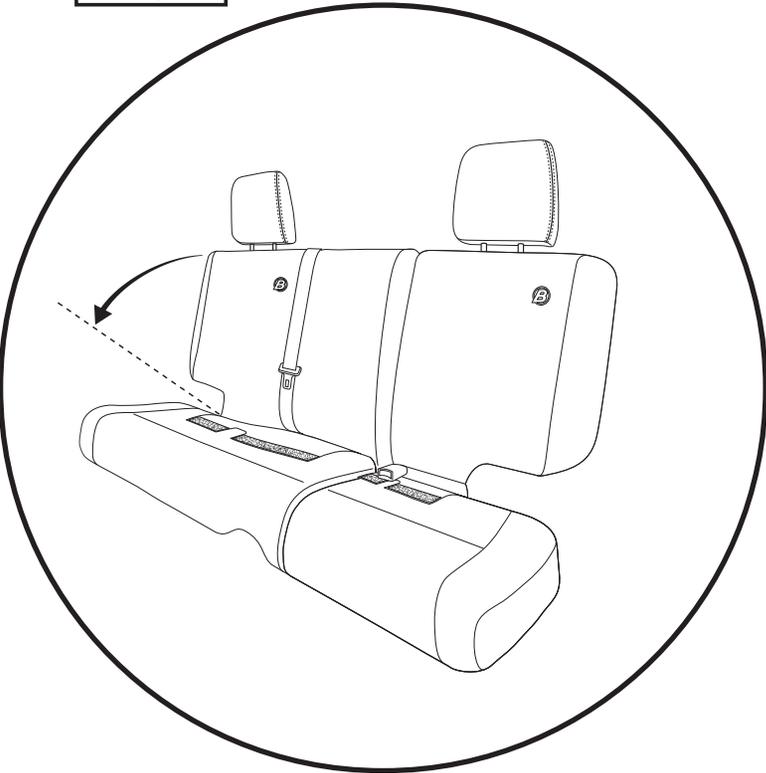

Step 1





Tilt the seatback forward about halfway, which will provide a space between the seatback and seat bottom.

With the seatback tilted forward, tuck the flap at the bottom of the Large seatback cover between the seatback and the seat bottom.

Repeat this for the Small seatback cover.

Move both seatbacks back to upright.


Step 2

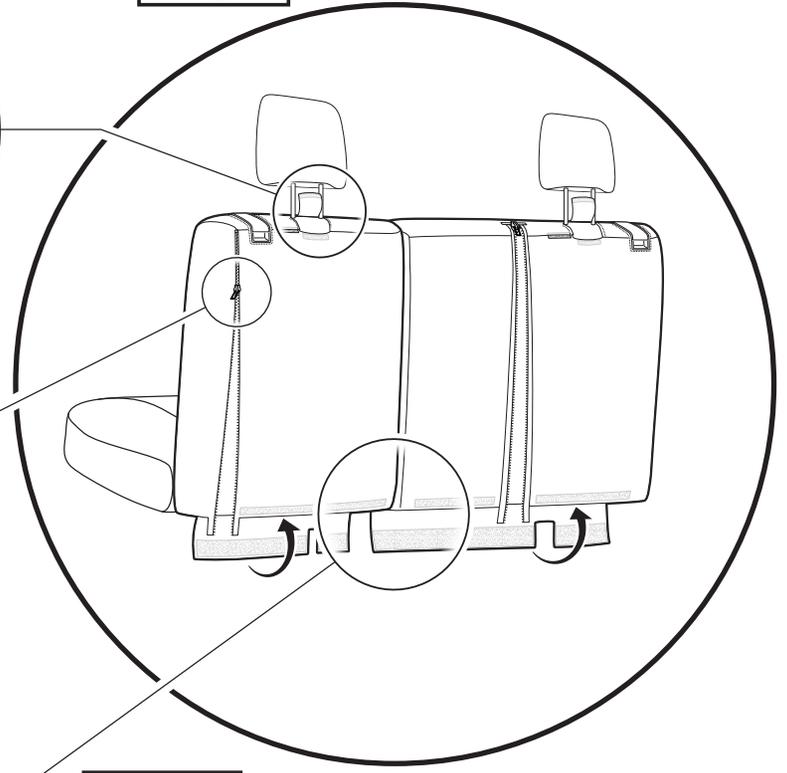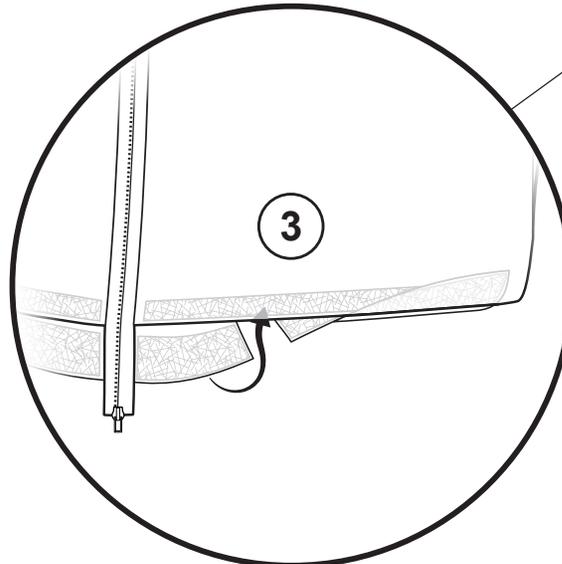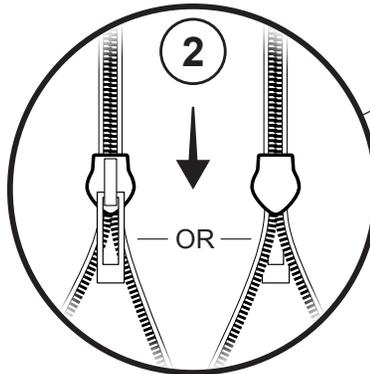

Step 2

- ① Tuck the flaps between the headrest posts underneath the seat covers at the rear. Close and secure the openings for the headrests with the mating hook-&-loop strips. Make sure that the seatback release latches are accessible on both seats.
- ② Zip the seatback covers closed on both the Large and Small seatback covers. Make sure that the seat belt is not caught in the cover and operates smoothly.
- ③ Tuck the flaps coming between the seatbacks and seat bottoms under the bottom of each seatback cover. Snug the fit by pulling down on the seatback cover while lifting up on the flaps and pushing the hook-&-loop strips firmly together.


Step 1

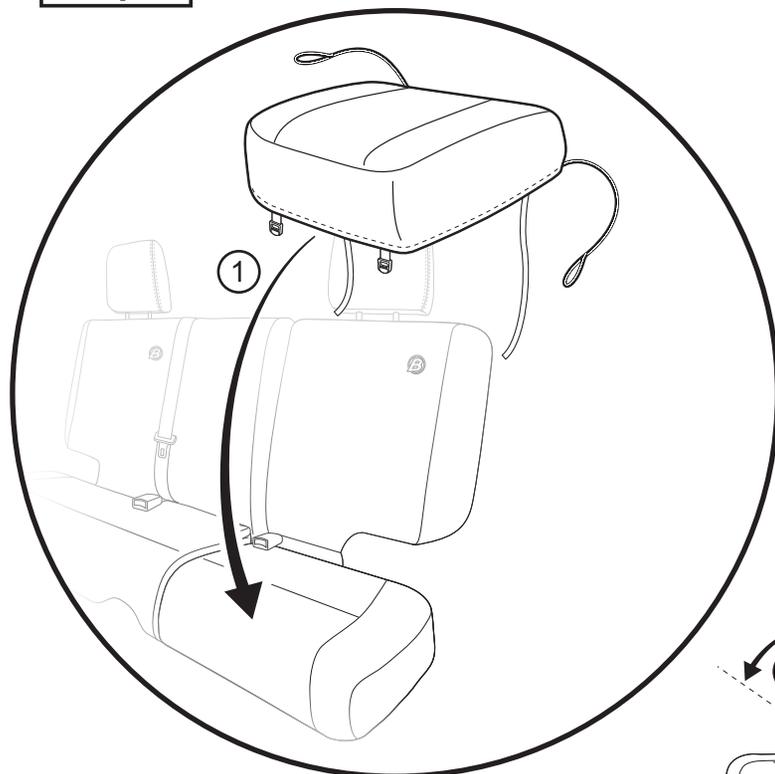

Step 1


- ① Slip the Small seat bottom cover over the Small seat bottom.
- ② Tilt the seatback halfway forward, to open a space between the seatback and seat bottom.
- ③ Feed the straps through between the seatback and seat bottom, and bring toward the front under the seat.
- ④ Attach the 2 nylon straps at the front of the underside of the seat to the buckles. Give the straps a gentle tug to snug the covers.

Step 2

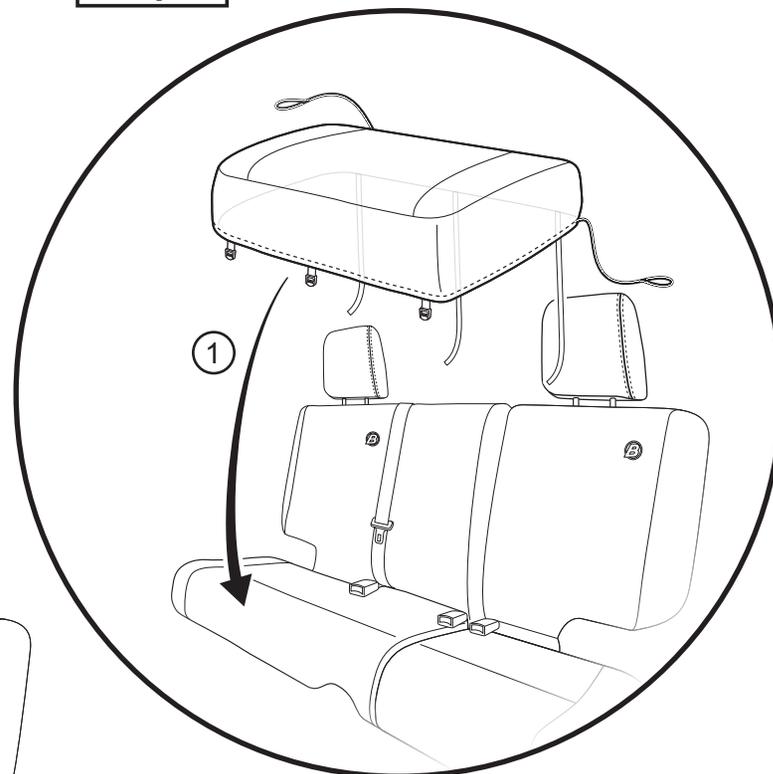


Step 2

- ① Slip the Large seat bottom cover over the Large seat bottom.
- Follow ② ③ and ④ from **Step 1** doing all the same things as you did on the Small seat bottom cover.

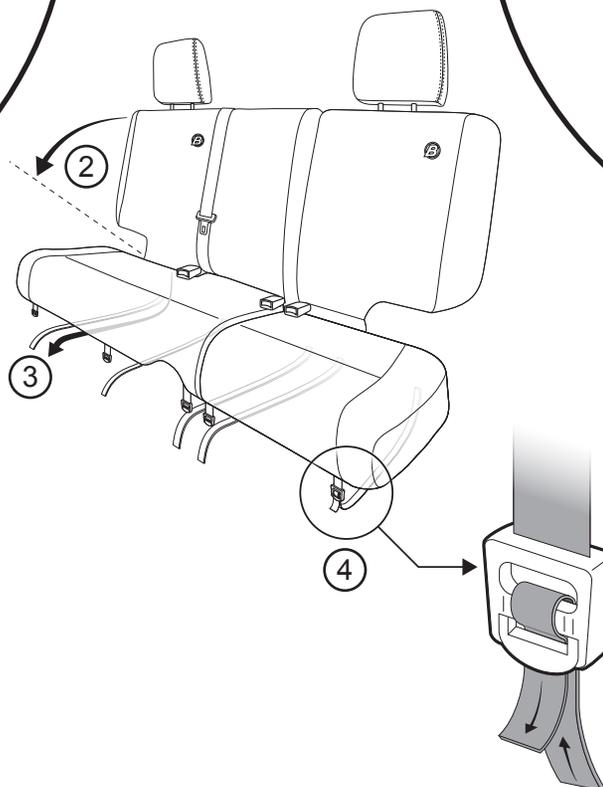

Step 1

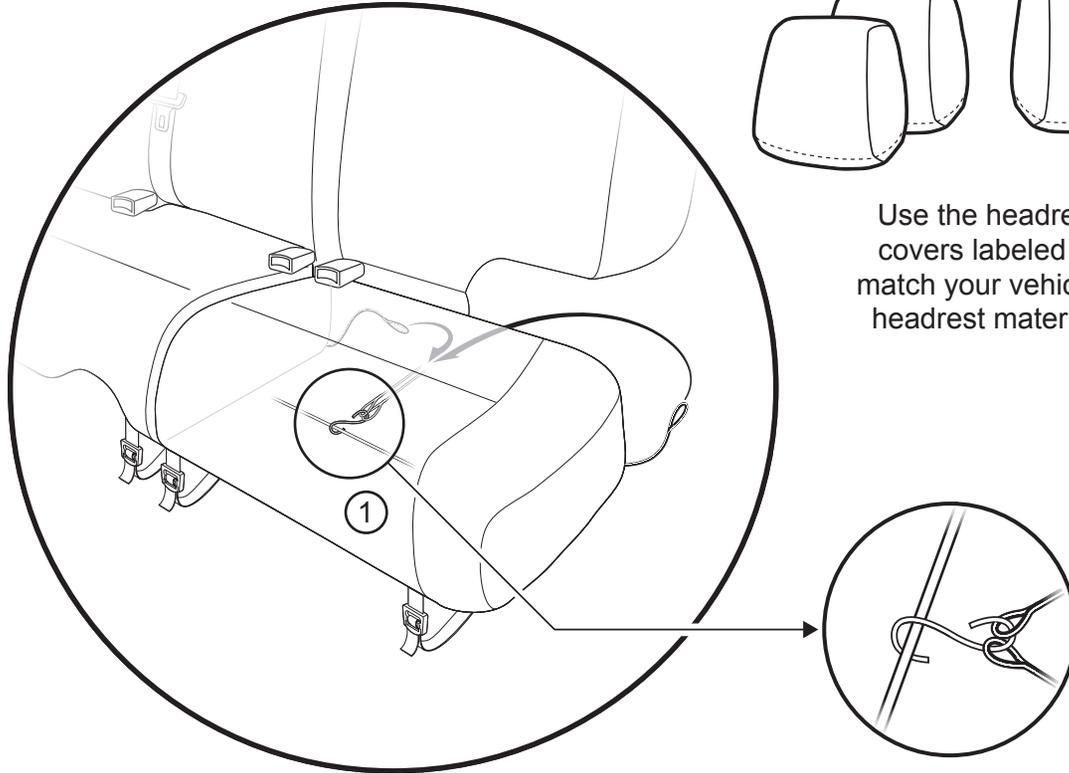


Step 1

① Attach the two ends of the elastic cords on the Small seat bottom cover to the closed end of one of the s-hooks.


Attach the s-hook to a cross-member or wire underneath the seat, making sure to keep the cords away from the seat adjustment tracks.

Repeat this procedure for the elastic cords on the Large seat bottom cover.

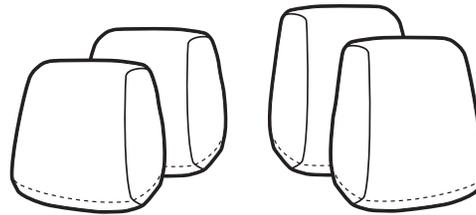

Use the headrest covers labeled to match your vehicle's headrest material.

Step 2

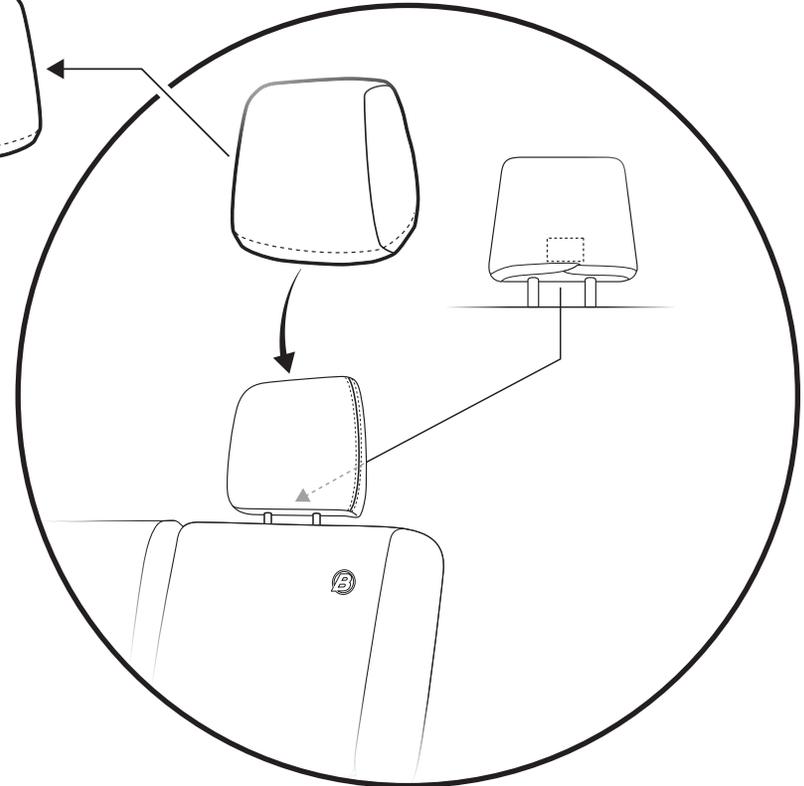

Step 2

Select the correct headrest covers from the 4 headrest covers that come in the installation kit. Use the headrest covers labeled to match your vehicle's headrest material.

Wrap the headrest covers over the headrests, making sure that the crossed elastic edging and internal label are at the back of each headrest. Adjust the seams for a smoother appearance.



Warranty Information Seat Cover, Rear Kit

Vehicle Application:
Jeep® Wrangler Unlimited JK 4-Door
2007, 2013-2018
Part Number 29284

WASHING:

Your seat covers are machine washable. Wash separately in COLD water with 1/4 of normal amount of soap. Hang Dry.

LIMITED WARRANTY

We warrant our product to be free from defects in material and workmanship, for the terms specified below, provided there has been normal use and proper maintenance. This warranty applies to the original purchaser only. All remedies under this warranty are limited to the repair or replacement of any item or items found by the factory to be defective within the time period specified.

If you have a warranty claim, first you must call our factory at the number below for instructions. You must retain proof of purchase and submit a copy with any items returned for warranty work. Upon completion of warranty work, if any, we will return the repaired or replaced item or items to you freight prepaid. Damage to our products caused by accidents, fire, vandalism, negligence, misinstallation, misuse, Acts of God, or by defective parts not manufactured by us, is not covered under this warranty.

THE WARRANTY TIME PERIOD IS AS FOLLOWS: ALL "SOFT GOODS" MANUFACTURED BY OUR COMPANY (USING PRIMARILY VINYLs, PLASTICS, AND/OR FOAM): ONE YEAR FROM DATE OF PURCHASE.

ANY IMPLIED WARRANTIES OF MERCHANTABILITY AND/OR FITNESS FOR A PARTICULAR PURPOSE CREATED HEREBY ARE LIMITED IN DURATION TO THE SAME DURATION AND SCOPE AS THE EXPRESS WRITTEN WARRANTY. OUR COMPANY SHALL NOT BE LIABLE FOR ANY INCIDENTAL OR CONSEQUENTIAL DAMAGE.

Some states do not allow limitations on how long an implied warranty lasts, or the exclusion or limitation of incidental or consequential damages, so the above limitations or exclusions may not apply to you.

This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

For further information or request for warranty work, please contact:

Bestop Inc., Customer Service
Toll-Free: (800) 845-3567
Main: (303) 465-1755
E-mail: csbestop@Bestop.com
Website: www.Bestop.com