

Tools Required


12mm Wrench
14mm Wrench

10mm Wrench
8mm Wrench

Phillips Screwdriver
Loctite

Parts List

Ref.No.	Qty.	PartNo.	Description
1	1	61-5311	WELDMENT, BX1822
2	2	201-0587	8MM-1.25 X 25MM HHBOLT, GRD 8.8
3	2	203-0002	5/16 FLAT WASHER, ZP
4	2	203-0102	8MM LOCKWASHER, ZP
5	2	201-0553	1/4-20 X 1/2 HX. WSH.D. TYPE F TCS, ZP
6	2	101-5822	ADAPTER, 4WAY CONNECTOR
7	2	201-0192	10-32 X 1/2 SLOT, RD. HD. SCREW
8	2	202-0047	#10-32 HEX NUT
9	2	203-0054	#10 LOCKWASHER
E			EXISTING BOLTS
	2	226-0046	BASEPLATE SAFETY CABLE, 36" CL III (NOT SHOWN)
	2	229-0359	QUICKLINK, 3/8, ZP (NOT SHOWN)

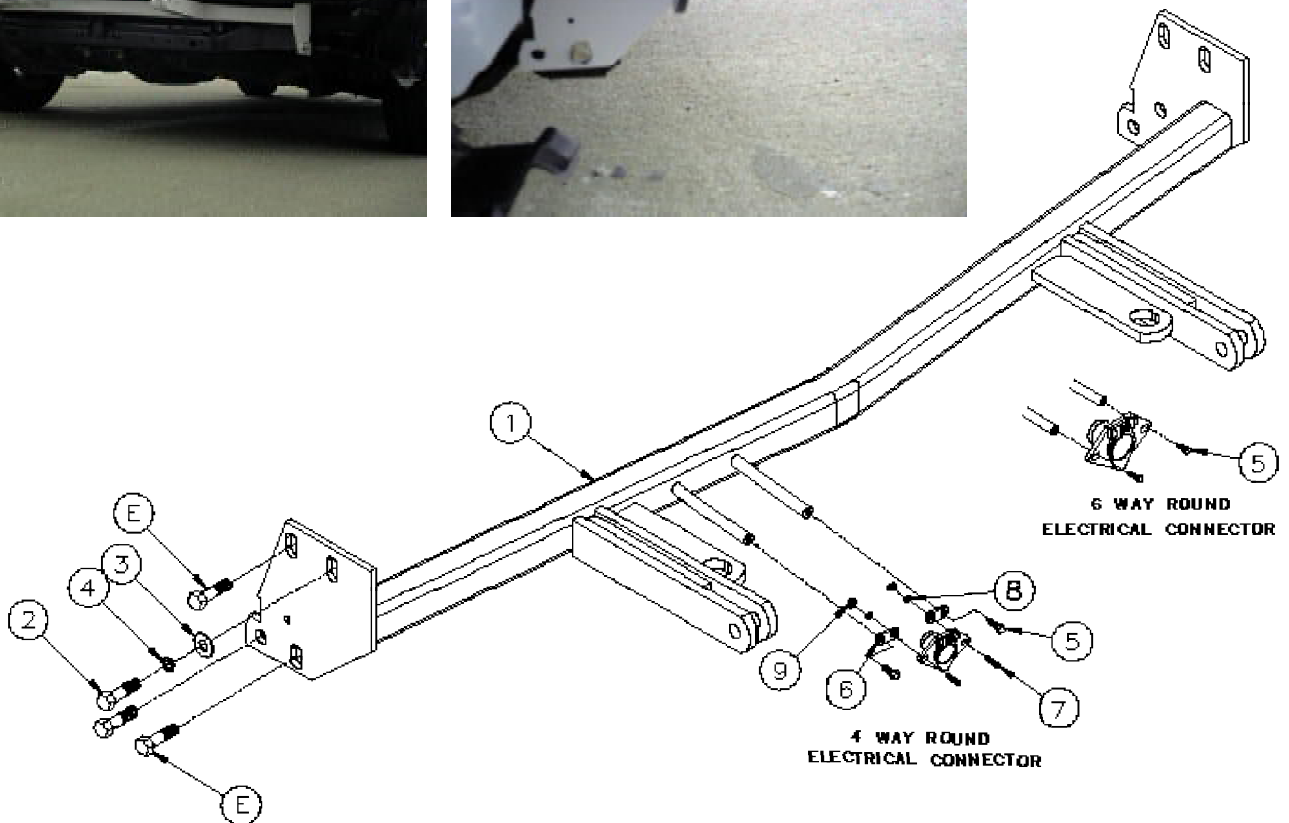



BX1822 Installation Instructions 1999 Nissan Sentra

The plastic bumper needs to be removed. Attachment tabs will extend through the bottom grill section.

1. Open the hood. Remove the center grill molding by squeezing the ends of the buttons that stick out of the back of the grill molding. Gently pull the grill molding off.
2. Remove the phillip screws holding the bumper molding located under the grill molding that was just removed. Remove the screws from the front area of the wheel well molding. Pull the black plastic back and notice the bolt on each side on the top corner of the bumper molding. Remove the two 10mm bolts on the under side of the bumper molding. Gently pull the bumper off.
3. Remove the the three 14mm bolts that hold each tie down bracket.
4. Remove the 12mm bolt holding the bumper plastic for the tie down bracket.
5. Hold the baseplate up to the existing holes in the frame. Use the existing bolts used from the tie down bracket and tighten bolts. Use the bolts from the bolt bag in place of the ones removed in step 4. **Use Loctite to ensure that the bolts do not loosen while the car is being towed.** Tighten all bolts according to the Torque Guide Chart in the General Instruction Sheet.
6. Replace bumper molding and Grill.
7. Install the tow bar and safety cables according to the instructions included in their packages. Do not substitute other devices if the tow bar pin and clip are lost.
7. **DEALER OR INSTALLER: BE CERTAIN THE USER RECEIVES THE INSTRUCTION SHEET.**



Automatic