




Extendable Trailer Towing Mirror Installation Instructions

For: All Dodge Ram Trucks 1994 - 2001

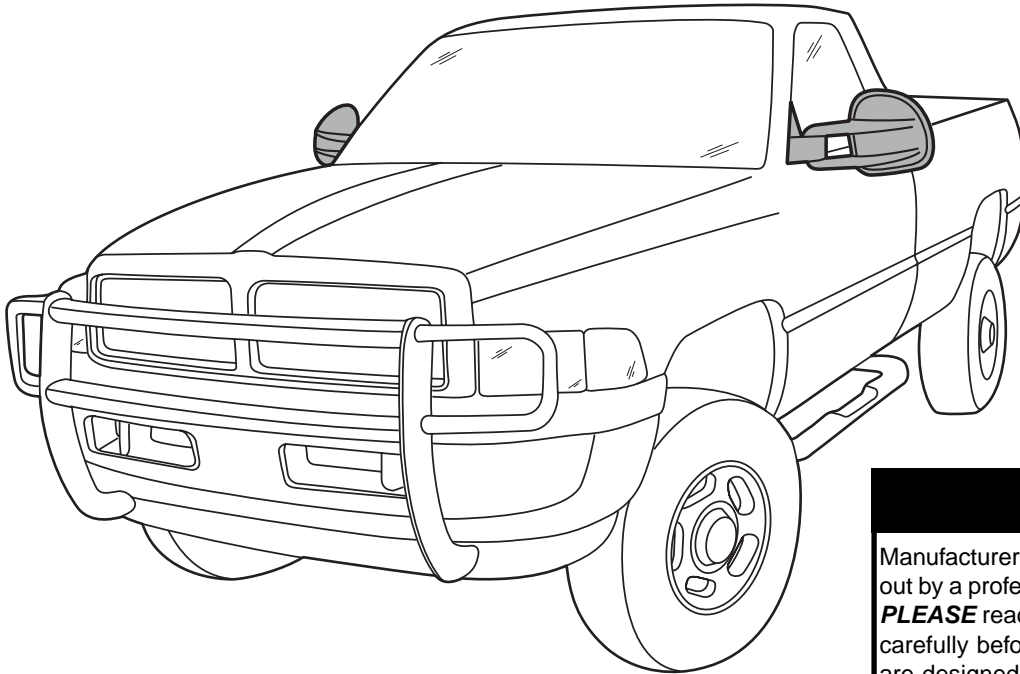


**CIPA Part Numbers 73000,
73100, 73500 & 83000**


WARNING

Manufacturer recommends this installation be carried out by a professional installer or your local dealership. **PLEASE** read **ALL INSTRUCTIONS** and warnings carefully before installing this product. These mirrors are designed only for the vehicle listed on this page. Ensure that the fitting instructions are followed exactly, as failure to do so may result in incorrect installation, or result in the driver, passenger or vehicle being placed in a hazardous condition, as well as voiding any warranty, implied or otherwise.


PARTS LIST




Driver's Side Mirror



Passenger Side Mirror




Driver's Side Reinforcement Bracket



Passenger Side Reinforcement Bracket

Installation Instructions



10mm Nut



10mm Bolt


TOOLS NEEDED




Ratchet



10mm Socket



10mm Deep Well Socket



Phillips Screwdriver



Trim Panel Removal Tool

Note: Two people are required for proper installation of this product.

STEP ONE


Loosening Trim Panel

Open the door and roll the window completely down. Use a Phillips screwdriver to remove the top screw in the trim panel. Set the screw aside to be reused. Then use a trim panel removal tool to pry the two Christmas tree fasteners at the top front of the panel out.

If you have manual windows, remove the window crank.

Remove and discard the mirror flag door gasket.

Note: It is not necessary to completely remove the trim panel from the door. Gently hold the top of the panel away from the door to access the mirror fastening nuts.

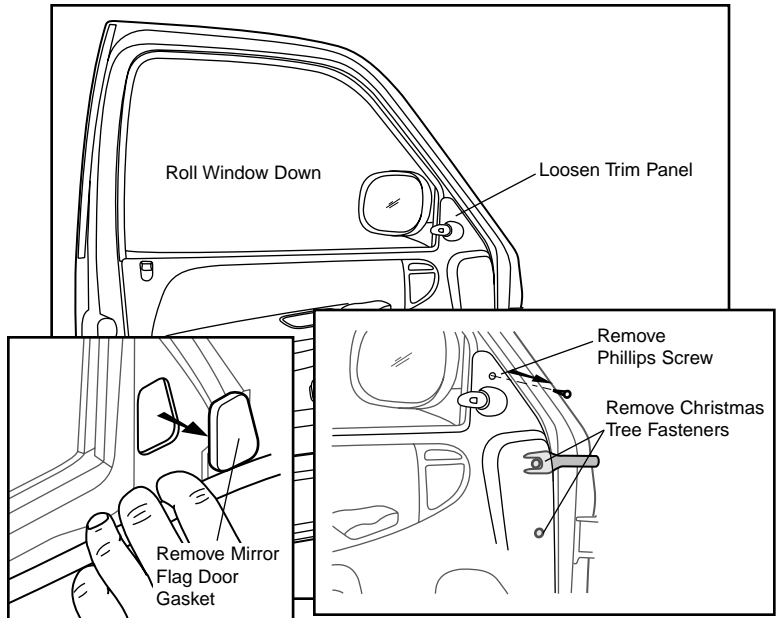


STEP TWO

Disconnecting Electrical Connector – Electric Mirrors Only

For manual mirror installation proceed to Step Three.

If you are installing an electric mirror, pull the wiring harness out of the door to access the plug. Gently pry the locking tab on the side of the plug and pull the harness away. DO NOT allow the harness and connector to fall into the door cavity.

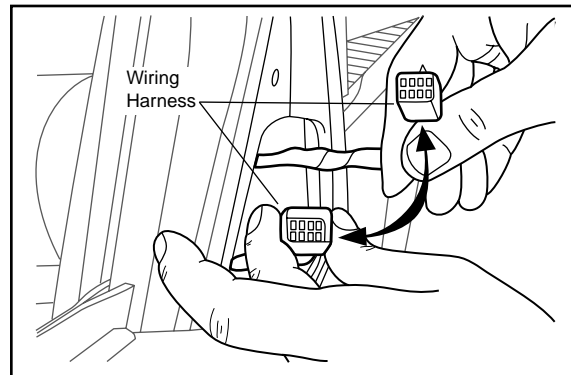


STEP THREE

Removing Factory Mirror

While a second individual holds the factory mirror, use an 8mm or 10mm socket (depending on the model year of the vehicle) to remove the three 10mm nuts inside the door. Make sure not to drop loose 10mm nuts into door cavity. Slowly remove factory mirror from door.


If the vehicle is equipped with an electrical harness feed it through as the mirror is removed.

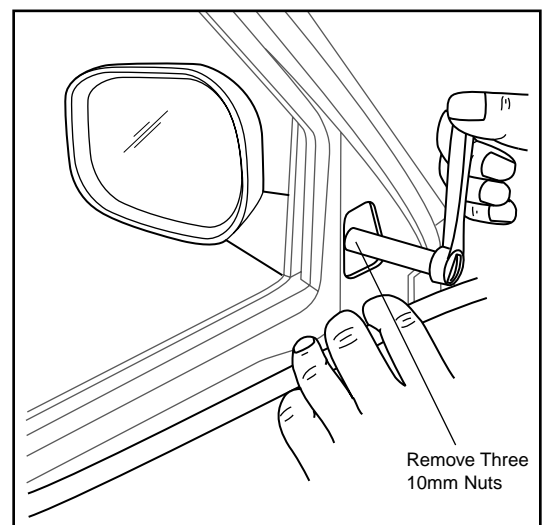

STEP FOUR

Reconnecting Electric Mirror

If you are installing an electric mirror, feed the wire harness through the center hole in the door and also through the center access hole of the reinforcement plate. Connect the wiring harness to the plug in the door.

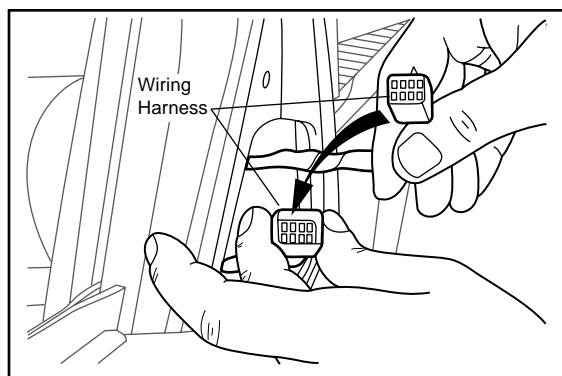


STEP FIVE

Installing Xtendable Trailer Tow Mirror

Clean any foreign material from sheet metal of door exterior with a clean, soft cloth.


Slide the two studs on the mirror into the holes in the door. While a second person holds the mirror in place, slide the reinforcement plate onto the mirror studs, if you haven't already done so in step four. Thread a 10mm nut from the parts kit onto the two bottom studs and the one 10mm bolt to the top hole. Once the nuts and bolt are installed on each stud, tighten them in an alternating pattern to 40 in. lbs.

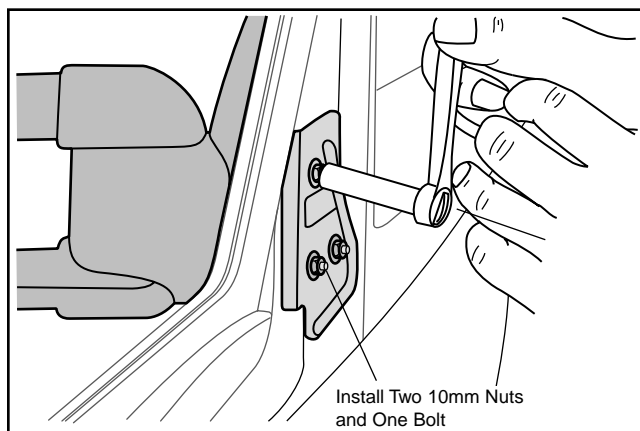

STEP SIX

Finishing Installation

Replace the trim panel and press the christmas tree fasteners back into position in the door. Reinstall the phillips screw removed in Step One.

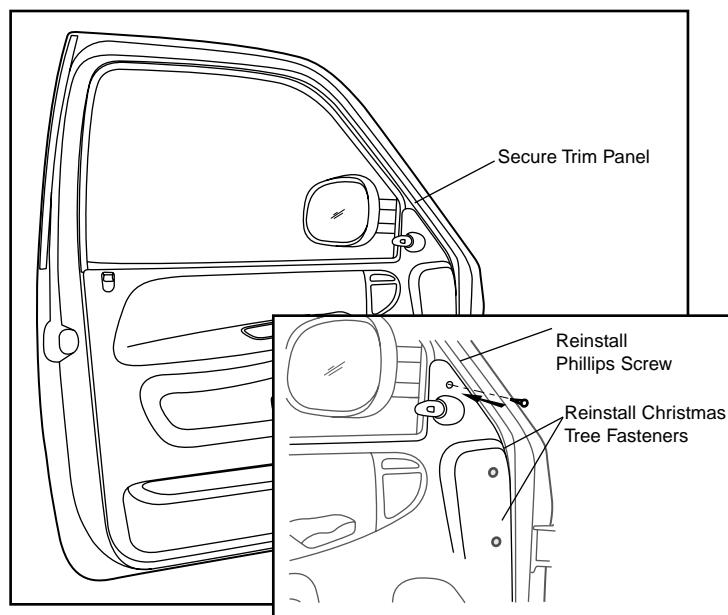

STEP SEVEN

Repeat this installation procedure with the remaining mirror on the other side of the vehicle.

This completes the installation of your Towing Mirror.