

# Dash Knob Installation Instructions



BY LOKAR INC.


1-877-469-7440 • [tech@lokar.com](mailto:tech@lokar.com) • [www.lokar.com](http://www.lokar.com)

## **General Installation Notes:**

Please read these instructions completely before beginning the installation. If you have any questions, please call.

Before beginning the installation, disconnect the negative battery cable and use wheel chocks to block the vehicle's wheels.

This Dash Knob is designed to fit a 3/16" (0.1875") shaft.

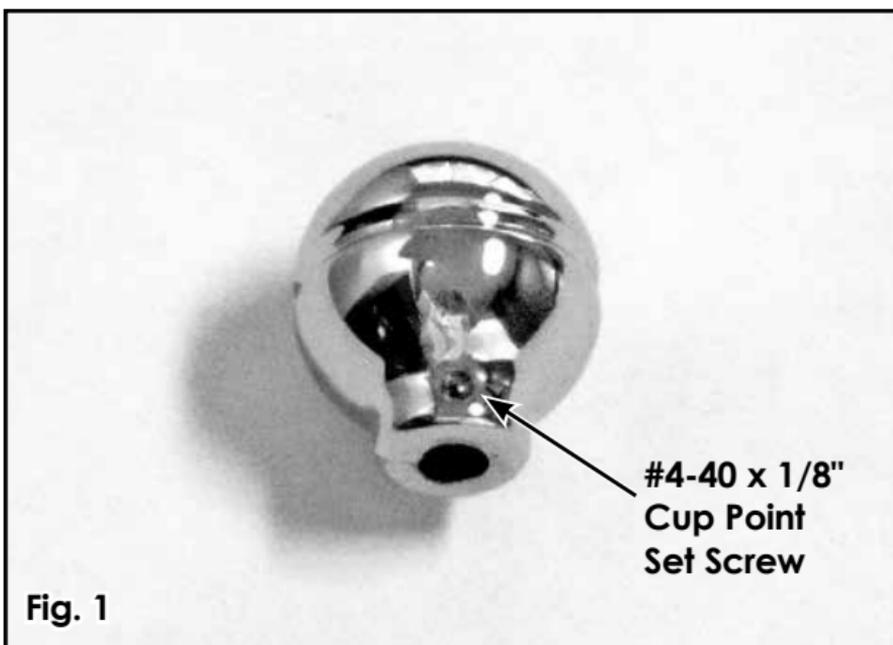

**Step 1:** Remove your existing knob.

**Step 2:** Loosen the #4-40 x 1/8" cup point set screw in the new Dash Knob using a 0.05" Allen wrench.

**Step 3:** Slide the new Dash Knob onto the shaft and tighten the set screw.