


56195

POWERED LOW SIDE SWITCH TAILLIGHT CONVERTER

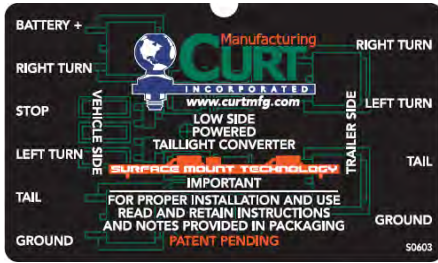

NOTE: SOME VEHICLES MAY BE EQUIPPED WITH A BATTERY SAVER FEATURE WHICH MAY REQUIRE YOU UNPLUG THE TRAILER WIRING FROM THE TRAILER WHEN NOT IN USE.

MUST READ FIRST!

All steps must be followed to ensure correct function of the T-Connector. To verify proper installation once installed, test by connecting a test light or properly wired trailer.


¡DEBE LEERSE PRIMERO!

Debe seguirse todos los pasos para asegurar el correcto funcionamiento del convertidor. Para verificar la correcta instalación, pruebe conectando una luz de prueba o un remolque debidamente cableado.


À LIRE D'ABORD!

Pour assurer le bon fonctionnement du convertisseur, il faut suivre toutes les étapes. Pour vérifier que l'installation a été bien effectuée, branchez un feu de test ou une remorque correctement fileté.


2/09/10

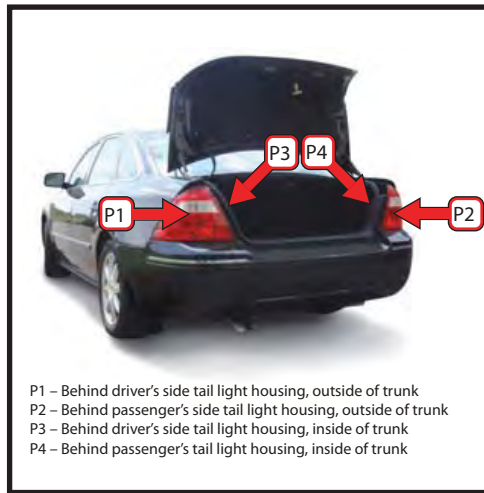


P1 - Behind driver's side tail light housing, outside of trunk
P2 - Behind passenger's side tail light housing, outside of trunk
P3 - Behind driver's side tail light housing, inside of trunk
P4 - Behind passenger's side tail light housing, inside of trunk

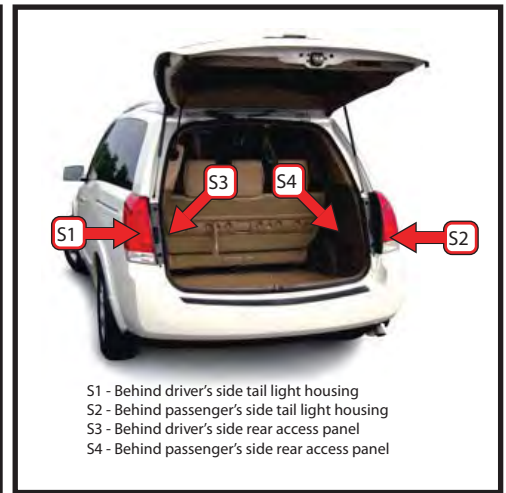

S1 - Behind driver's side tail light housing
S2 - Behind passenger's side tail light housing
S3 - Behind driver's side rear access panel
S4 - Behind passenger's side rear access panel

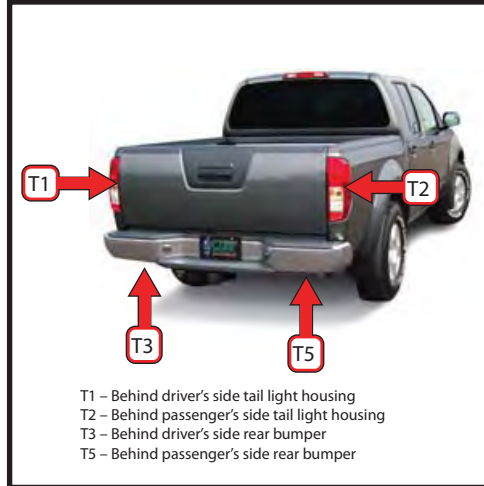

T1 - Behind driver's side tail light housing
T2 - Behind passenger's side tail light housing
T3 - Behind driver's side rear bumper
T5 - Behind passenger's side rear bumper

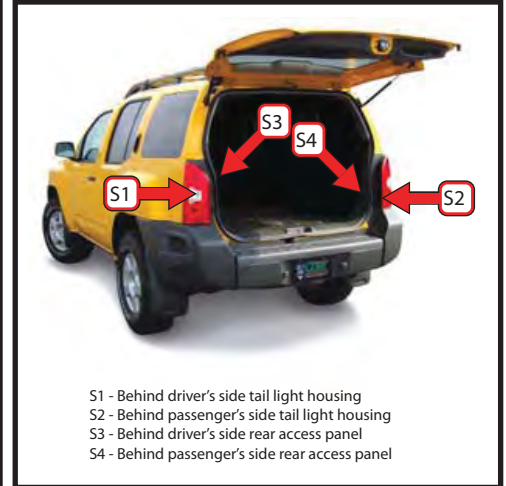

S1 - Behind driver's side tail light housing
S2 - Behind passenger's side tail light housing
S3 - Behind driver's side rear access panel
S4 - Behind passenger's side rear access panel

English

Above you'll find the typical locations in which you will be hardwiring your converter onto your vehicle. On the backside of this sheet you will find illustrations in reference to a generic installation on a car. Refer to these illustrations as you read through the instructions. **A**

1. Locate the vehicle's taillight wiring, refer to typical locations above, based on type of vehicle you're installing the converter on.
2. When using a probe type test lamp **B** to determine wire function on a "low side" (ground) switching system, all circuits will initially be hot. The lamp will go off when a circuit is activated.
Example: When attempting to locate the tail/running light circuit, turn the vehicle's taillights on, probe until a wire is found that does not light the probe. Turn the lights off, if the correct wire is found the probe will light.

3. Temporarily remove the vehicle's negative battery cable from the battery.

4. Using wire taps, attach the input wires of the tail light converter to the corresponding vehicle harness wires identified in Step 2 as indicated. **C**

Converter Brown Wire: Tail Light Circuit
Converter Yellow Wire: Left Turn Circuit
Converter Red Wire: Brake Light Circuit
Converter Green Wire: Right Turn Circuit

5. Locate a clean accessible mounting location for the converter module. If locating on the CONVERTER outside the vehicle cabin, find a clean surface that is out of the path of spray and debris from the rear wheels and the road surface.

WARNING!

Verify miscellaneous items that may be hidden behind or under any surface before drilling to avoid damage to vehicle and/or personal injury.


6. Locate a suitable mounting location for the ground eyelet on the vehicle near the converter on vehicle's frame or cross member. Remove any debris or undercoating to expose a clean metal surface and drill a 3/32" hole. Mount the white wire using the ground screw and eyelet provided.

7. Secure the converter wires to the vehicle using cable ties and reinstall negative battery cable on battery.

TESTING PROCEDURE

-If testing with a circuit tester, attach the ground lead of a circuit tester to the exposed ground terminal of the 4-flat end. Activate the tow vehicle's left turn, right turn, tail and stop lights one at a time. Probe the three receptacles of the 4-flat end to confirm proper functionality.

-If testing with a trailer, mate 4-flat with trailer and run the same test as the circuit tester using the trailer lights. If a function on the trailer lights does not work properly, disconnect the trailer 4-flat, turn functions on vehicle off and recheck function with a circuit tester. If functionality is good, check the trailer for potential problems.

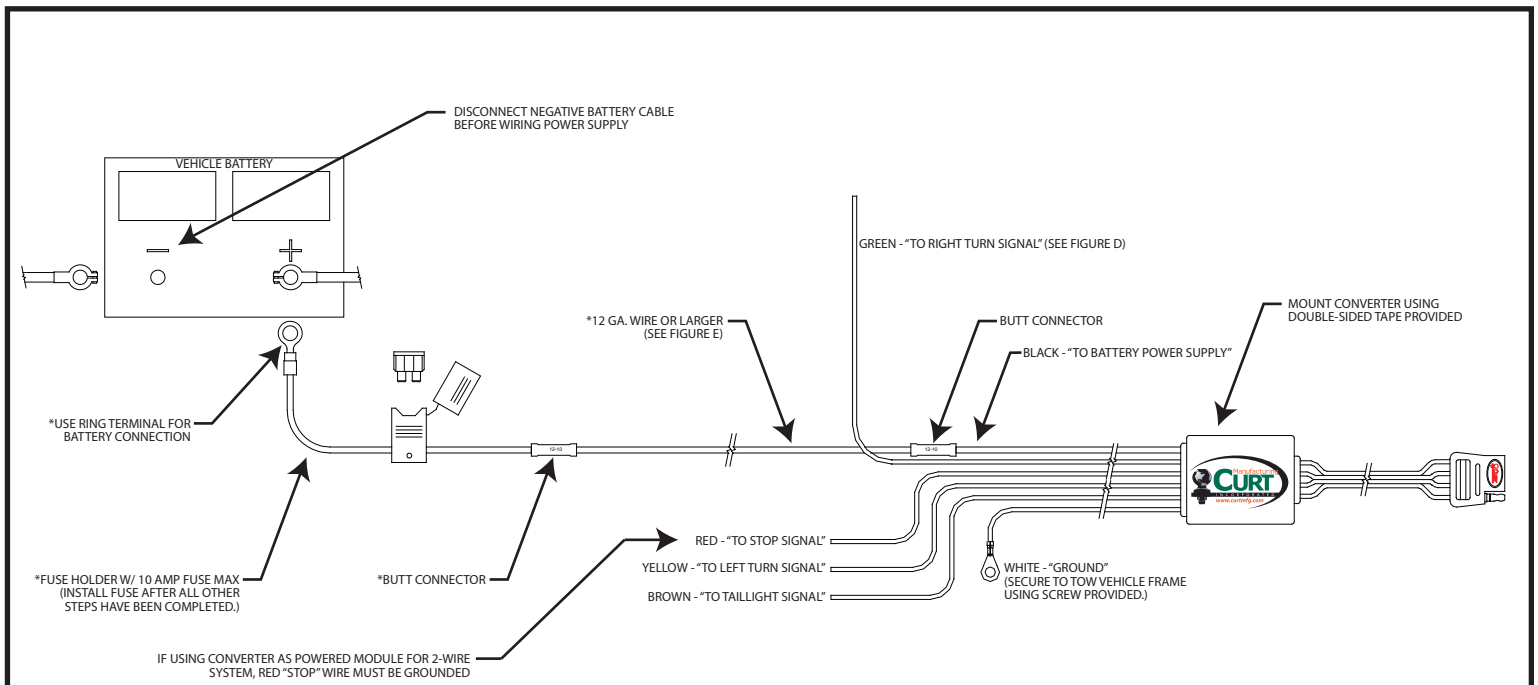


THIS CONVERTER SYSTEM IS TO BE USED ONLY WITH LOW SIDE SWITCHED TAILLIGHT SYSTEM (ILLUSTRATION NOT TO SCALE)

*NOT INCLUDED, MUST PURCHASE 55151 KIT SEPERATELY




A




B

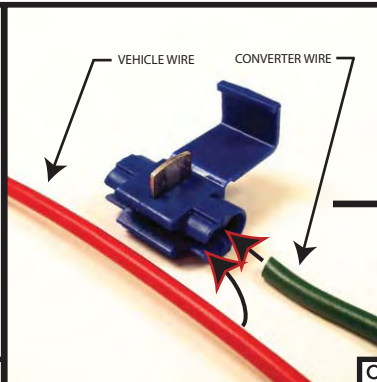

C

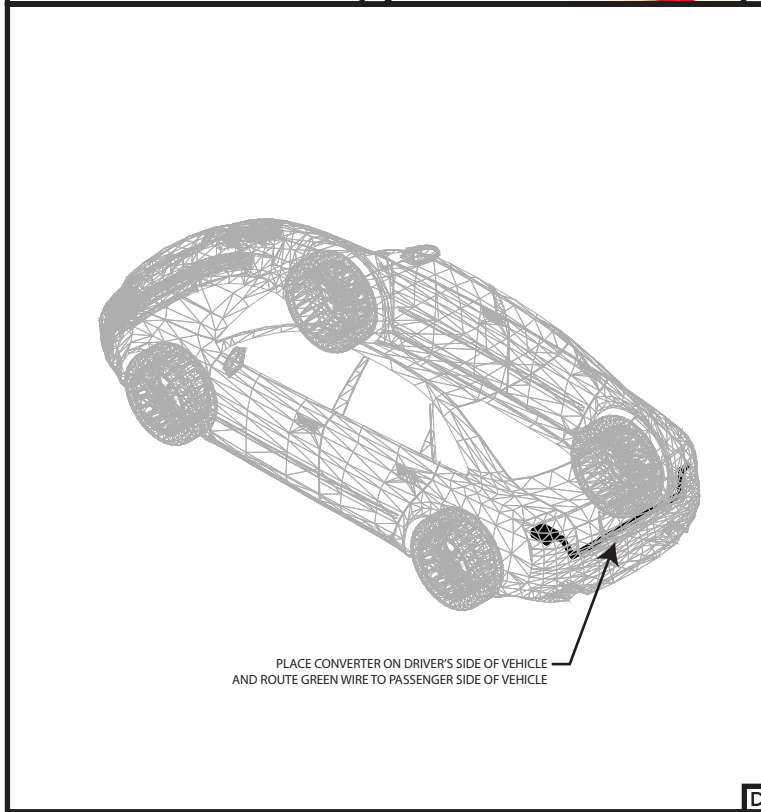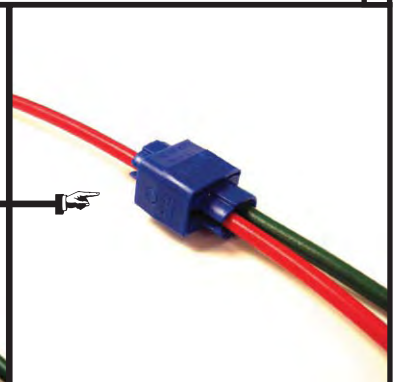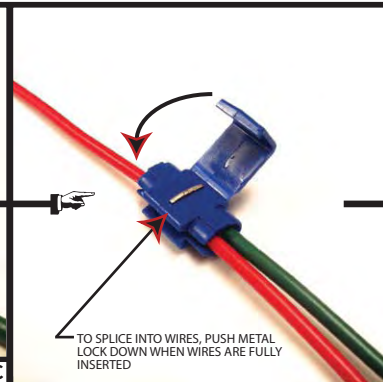

D

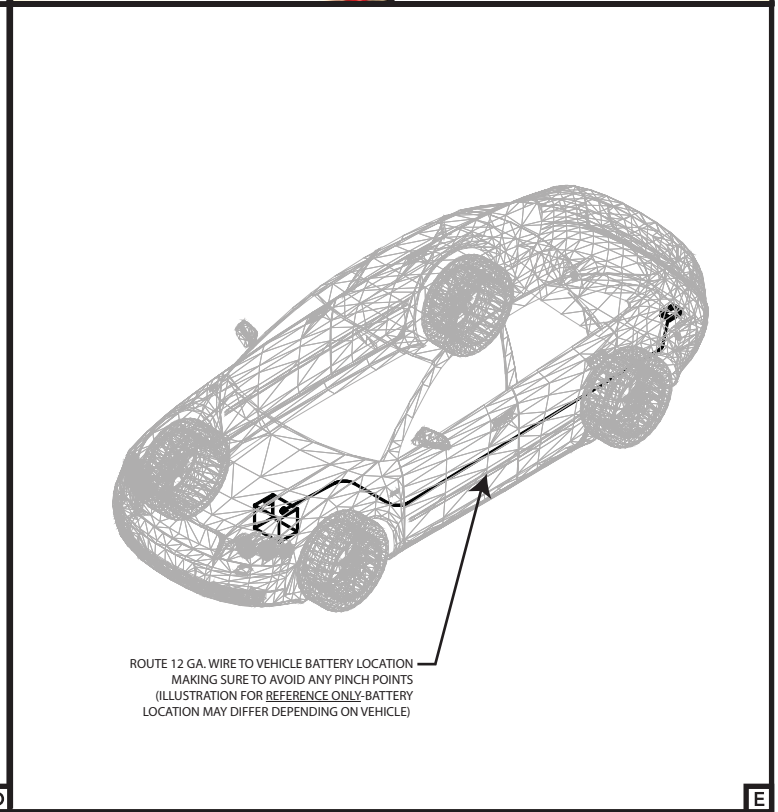

E