# 12009

**77-85 BUICK LESABRE AND CENTURION, 77-84 ELECTRA AND PARK AVE, 92-96 ROADMASTER**
**77-96 CHEVROLET CAPRICE ,80-85 OLDSMOBILE 88 AND 80-84 98, 83-86 PONTIAC PARISIENNE**

**10/15/2012**

GROSS LOAD CAPACITY WHEN USED AS A WEIGHT CARRYING HITCH:  3,500   LBS. TRAILER WEIGHT &   350   LBS. TONGUE WEIGHT.
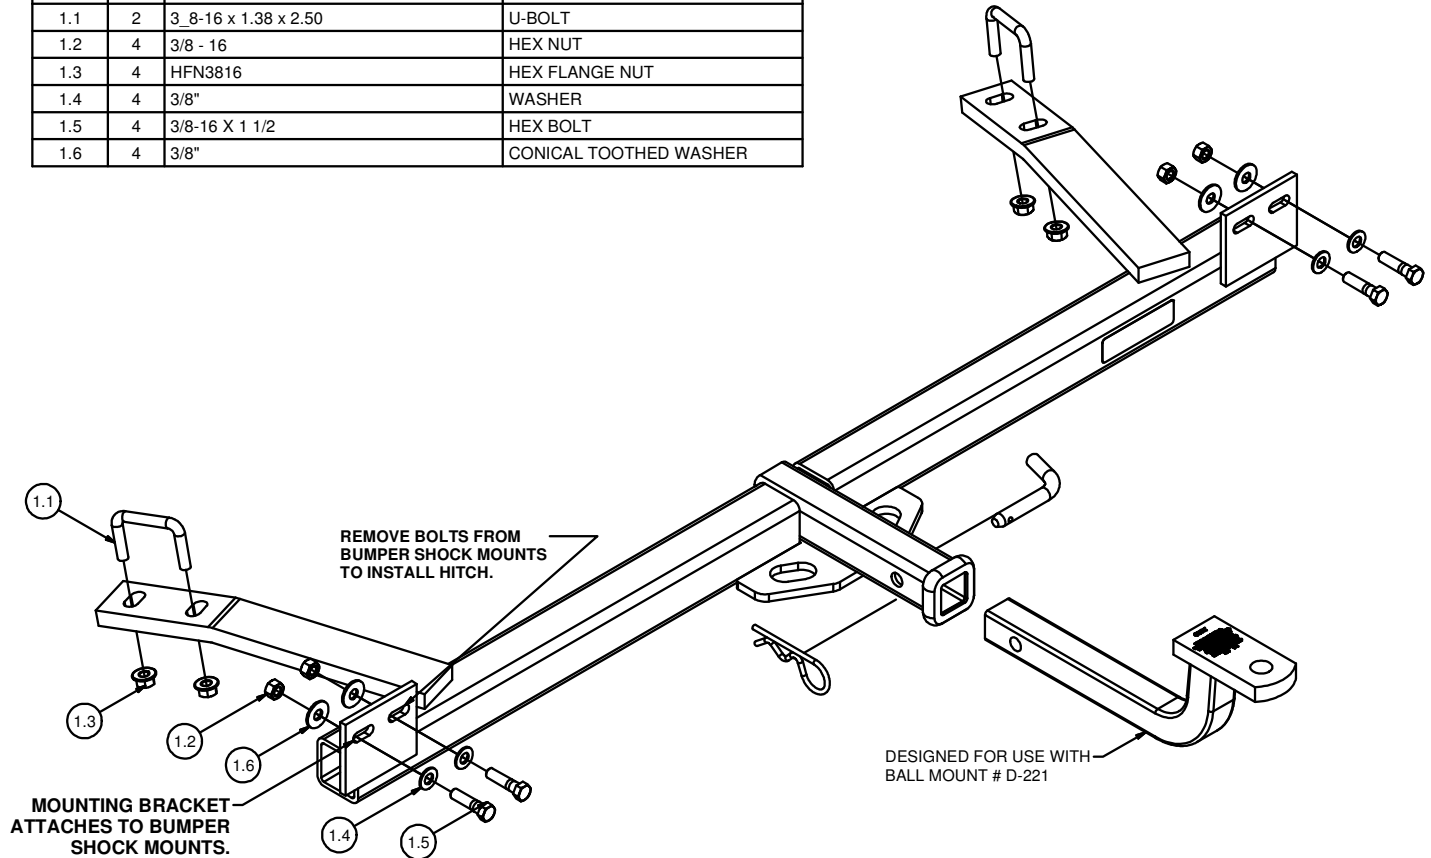***DO NOT EXCEED VEHICLE MANUFACTURER'S RECOMMENDED TOWING CAPACITY.***
WARNING: ALL NON-TRAILER LOADS APPLIED TO THIS PRODUCT MUST BE SUPPORTED BY AUXILIARY STABILIZING STRAPS.
** FAILURE TO PROPERLY SUPPORT NON-TRAILER LOADS WILL VOID PRODUCT WARRANTY**
HAVING INSTALLATION QUESTIONS?  CALL TECHNICAL SUPPORT AT 1-800-798-0813

| Parts List | | | |
|------|-----|-------------|-------------|
| ITEM | QTY | PART NUMBER | DESCRIPTION |
| 1.1 | 2 | 3_8-16 x 1.38 x 2.50 | U-BOLT |
| 1.2 | 4 | 3/8 - 16 | HEX NUT |
| 1.3 | 4 | HFN3816 | HEX FLANGE NUT |
| 1.4 | 4 | 3/8" | WASHER |
| 1.5 | 4 | 3/8-16 X 1 1/2 | HEX BOLT |
| 1.6 | 4 | 3/8" | CONICAL TOOTHED WASHER |



REMOVE BOLTS FROM
BUMPER SHOCK MOUNTS
TO INSTALL HITCH.

MOUNTING BRACKET
ATTACHES TO BUMPER
SHOCK MOUNTS.

DESIGNED FOR USE WITH
BALL MOUNT # D-221

HITCH WEIGHT:  40  LBS.
INSTALL TIME
  PROFESSIONAL: 30  MINUTES
  NOVICE (DIY):  60  MINUTES
INSTALL NOTES:
  -DRILLING REQUIRED

FRONT
REAR

## INSTALLATION STEPS

1) Remove 4 bolts from bumper shock mounts.

2) Raise hitch into position and install bolts and fasteners to bumper shock mounts

3) Drill holes as needed for U-bolts and install U-bolts.

4) Torque 3/8 fasteners to 45 lb.-ft

**PERIODICALLY CHECK THIS RECEIVER HITCH TO ENSURE THAT ALL FASTENERS
ARE TIGHT AND THAT ALL STRUCTURAL COMPONENTS ARE SOUND.**