

Installation Instructions JK Limb Risers

Product Number: JK1060 / JK1061 Application: 07-15 JK JEEP WRANGLER

SAFETY

Your safety and the safety of others is very important.

- In order to help you make informed decisions about safety, we have provided installation instructions and other information.
- These instructions alert you to potential hazards that could hurt you or others.
- Please do a job safety analysis (JSA) before each task to identify potential hazards for your situation and remove/protect against them.
- You must use your own good judgment, and take your time.

Read and understand all safety precautions and instructions before installing this product.

THIS PRODUCT IS FOR OFFROAD USE ONLY. ALL LIABILITY FOR INSTALLATION AND USE RESTS WITH THE OWNER.

CARELESS INSTALLATION AND OPERATION CAN RESULT IN SERIOUS INJURY OR EQUIPMENT DAMAGE.

SENSORS FIELD OF VIEW WILL BE ALTERED WITH USE OF THE REPLACEMENT BUMPER.

Injury hazard

Failure to observe these instructions could lead to severe injury or death.

- Always remove jewelry and wear eye protection.
- □ Always use extreme caution when jacking up a vehicle for work. Set emergency brake and use tire blocks. Locate and use the vehicle manufacturers designated lifting points. Use jack stands.
- Always use appropriate and adequate care in lifting components into place.
- Always insure components will remain secure during installation and operation.
- Always wear safety glasses when installing this kit. A drilling operation will cause flying metal chips. Flying chips can cause serious eye injury.
- □ Always use extreme caution when drilling on a vehicle. Thoroughly inspect the area to be drilled (on both sides of material) prior to drilling, and relocate any objects that may be damaged.
- Always use extreme caution when cutting and trimming during fitting.
- **Always** tighten all nuts and bolts securely per installation instructions.
- Always route electrical cables carefully. Avoid moving parts, components that become hot and rough or sharp edges.
- **Always** insulate and protect all exposed wiring and electrical terminals.
- Always perform regular inspections and maintenance on mounts and related hardware.



I. <u>Overview</u>

Congratulations on your purchase of the industries' best and most stylish limb risers! These limb risers have been **engineered** for strength while keeping the weight down.

Your limb risers have been designed in 3-D, fabricated, and powder coated... all in the U.S.A.

Enjoy the fit and finish of a quality set of limb risers from Fab Fours Inc!






Installation Instructions JK Limb Risers

Product Number: JK1060 / JK1061 Application: 07-15 JK JEEP WRANGLER

Upper Mount Install (without Fab Fours Vi-Cowl)

1. Start by positioning upper bracket in the top of the door jamb as shown below. With bracket in place, use a center punch to mark hole location.

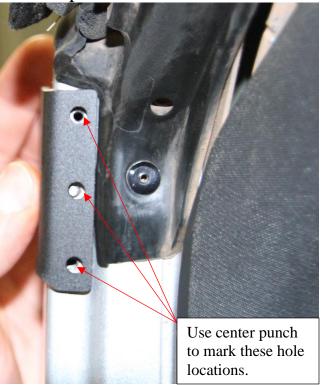

Next using a #20 drill bit, angle drill bit inboard (i.e. toward windshield) slightly, drill the marked holes. Some of the holes will have to go through 2 layers. See image below.





3. Next using supplied M10 self-tapping screws secure upper limb riser mount to vehicle. See image below.



4. Repeat steps 1-3 to install passenger side upper mount.

Upper Mount Install (with Fab Fours Vi-Cowl)

- **1.** Locate the two mounting holes on the side of your Fab Fours Vi-Cowl.
- 2. Using supplied hardware install upper mount on to your Vi-Cowl as shown below.



Installation Instructions JK Limb Risers

Product Number: JK1060 / JK1061 Application: 07-15 JK JEEP WRANGLER




Lower Mount install

- **1.** Start by open hood of vehicle.
- 2. With hood propped up, using a 10mm socket remove the two nuts located on inside of hood latch. See image below.





3. Next remove hood latch and slide lower mount behind hood latch as shown below.



- **4.** Next place lower mount and hood latch back on hood and tighten all hardware.
- **5.** Repeat steps 1-4 for passenger side.



Installing Limb Riser Cable

1. Start by sliding cable end over mount and lining up holes. With holes lined up put pin through both cable end and mount as shown below.



2. Repeat step one to install the other side of the cable.






II. Maintenance/Care

- □ Periodically check and tighten all fasteners.
- □ Stripped, fractured, or bent bolts or nuts need to be replaced.
- □ Keep all surfaces free of dirt, road grime, and standing water to ensure finish longevity.

III. Contact Information

Fab Fours Inc. 2213 Industrial Park Rd. Lancaster, SC 29720

Phone	(866)-385-1905
Fax	(866)-574-1424
Email	Support@fabfours.com

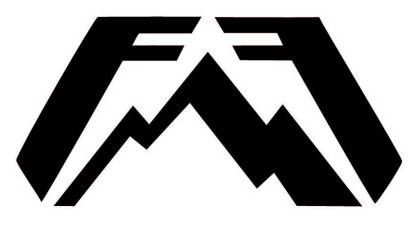

More than expected... Better than expected