

**PARTS LIST**

DESCRIPTION	QTY.
HEAT SHIELD	1
CLAMPS	2

STEP 1

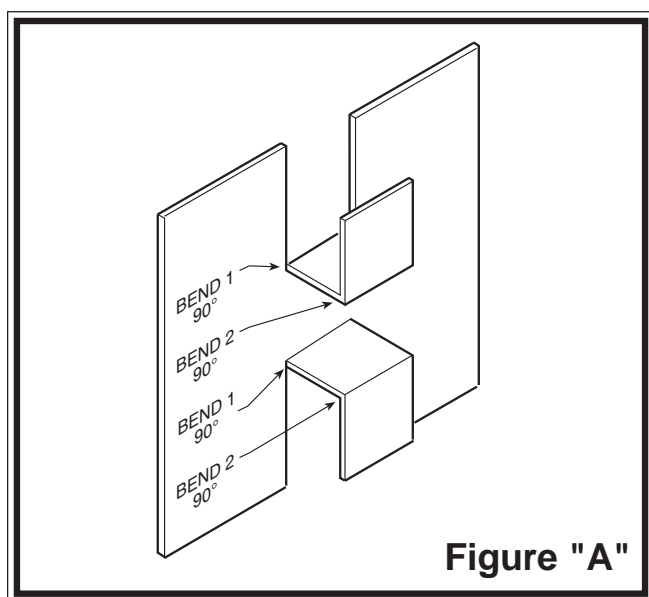
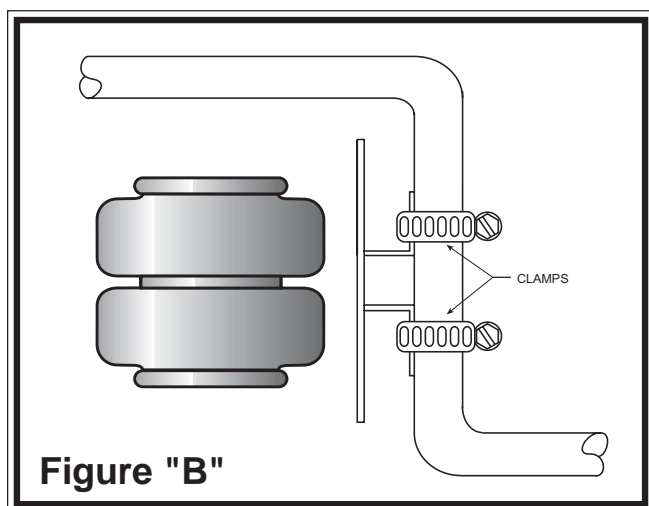
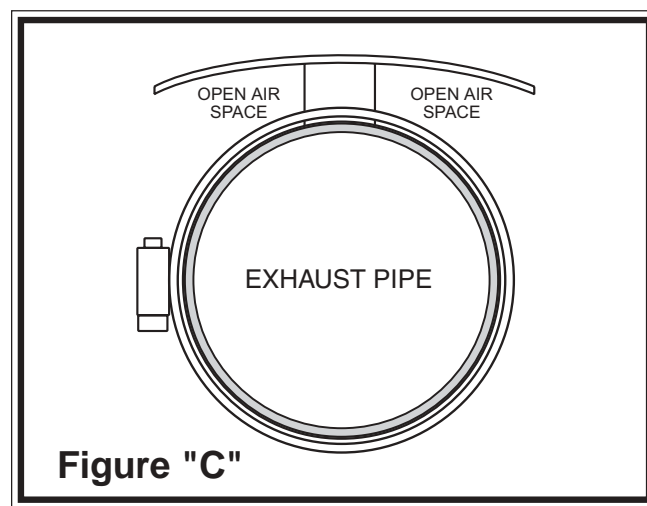
Bend the heat shield middle tab out at a 90 degree angle and bend the heat shield again half the distance up the tab at a 90 degree angle to form a "L" shape refer to *Figure "A"*.

STEP 2

Mount the heat shield between the air spring and the exhaust pipe. Mount the heat shield using the clamps provided see *Figure "B"*. **Maintain clearance between heat shield and moving axle, lines, etc...**

STEP 3

Bend the heat shield around the exhaust pipe, while allowing for open air space of 1/2" to 1" as shown in *Figure "C"*.

**Figure "A"****Figure "B"****Figure "C"**

FIRESTONE INDUSTRIAL PRODUCTS
 12650 HAMILTON CROSSING BLVD.
 CARMEL, IN 46032
www.ride-rite.com