

Thank you for purchasing a LUND accessory; designed, engineered and built specifically for your vehicle. We have made every effort to ensure that this hood deflector is top quality in terms of fit, durability, finish and ease of installation.

Package Contains: 1 Shield


Applications: Dodge Ram, Dodge Dakota

Tools Needed: 8mm (5/16") socket and ratchet

Installation Instructions


Please read carefully and completely before starting.

1. Clean hood of vehicle using hot soapy water, rinse and dry thoroughly.

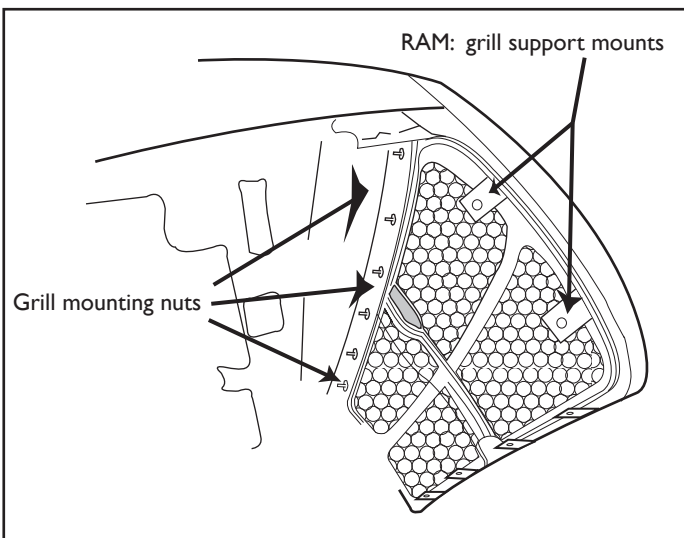


2. RAM: Open hood and **loosen** the grill mounting nuts and the grill support mounting screws. Allow 1/4" to 3/8" gap between hood and grill.

DAKOTA: Open hood and **remove** the grill mounting nuts. Allow 1/4" to 3/8" gap between hood and grill.

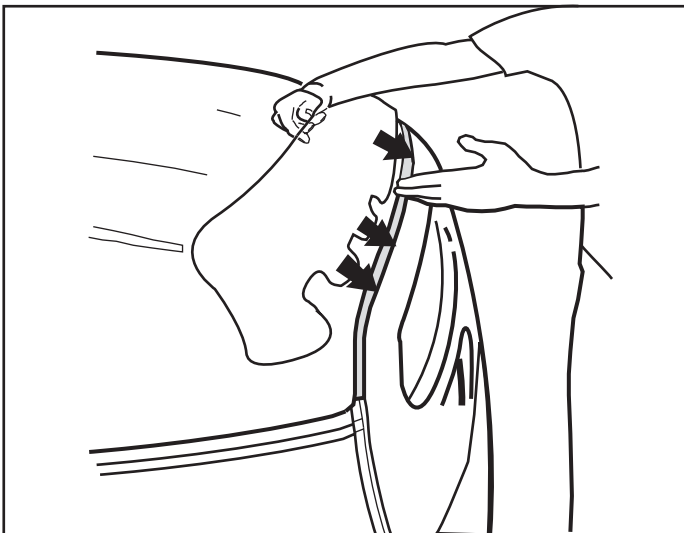


3. RAM, DAKOTA: Gently slide shield between hood and grill. Make sure that the shield is centered left to right on the hood.

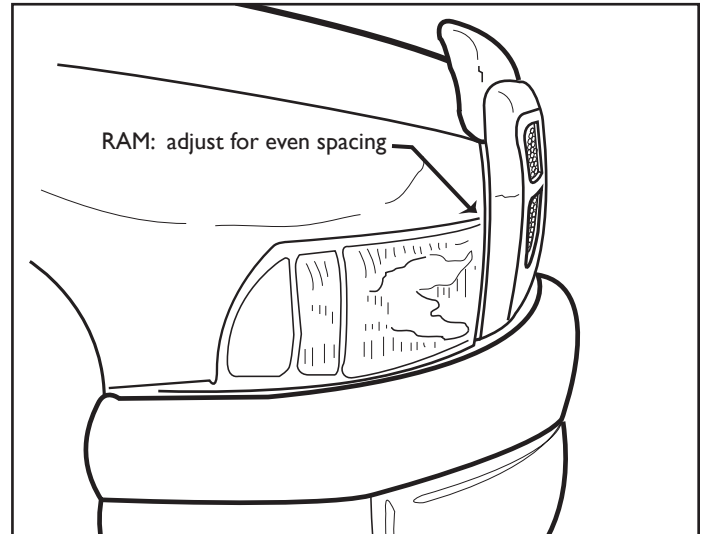

4. RAM: Tighten the grill mounting nuts and grill support mount screws. (NOTE: adjustment of the grill support may be required to ensure even spacing between the grill and fender. This adjustment is required for proper fit of the Lund fender shields.)

DAKOTA: Reinstall and tighten grill mounting nuts.

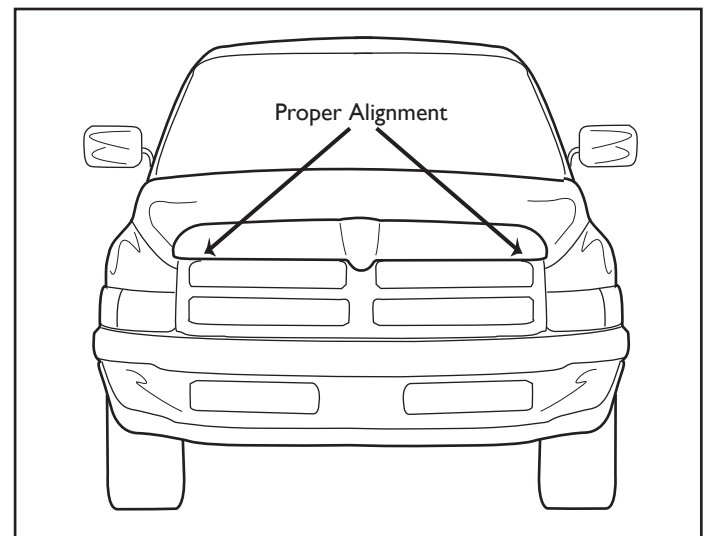

5. RAM, DAKOTA: Inspect fit to make sure shield is aligned properly with grill. Loosen grill mounts and adjust shield placement if necessary.



Care & Cleaning

1. Avoid the use of automatic "brush-style" car washes.
2. Do not use cleaning solvents of any kind.
3. To wash, use only a mild soap and dry with a clean cloth or sponge.
4. Do not pull on shield to close the hood.

If painting of the shield is desired:

CHECK FIT BEFORE PAINTING. LUND WILL NOT WARRANT PAINTING ON MISFITTING SHIELDS

1. Prep shield by cleaning with mild soap and water, rinse and dry thoroughly.
DO NOT USE ANY SOLVENTS TO PREP SHIELD!
2. Use only an Acrylic Based Enamel.
3. Apply several light coats of paint as opposed to one thick coat.
4. Let dry for 24 hours.