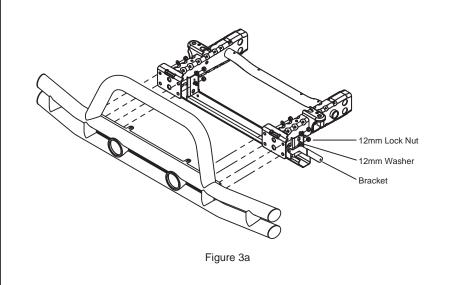


3. Position Tube Bumper with the 12mm studs facing the vehicle. These studs go through the 8 holes on the front of the frame rails. Place bumper onto vehicle and install 12mm washers and locknuts. Install Brackets on lower outside studs, behind frame rail, as shown. Tighten Lock Nuts, ensuring that the Brackets are not rotated out of vertical.








Figure 3b

4. Position Cover Plate over the Tube Bumper (Figure 4a). Drop it over the frame rails (not shown for clarity) and fasten in 4 places with supplied Push Fasteners. Re-use original fasteners on two recessed areas closest to grille.

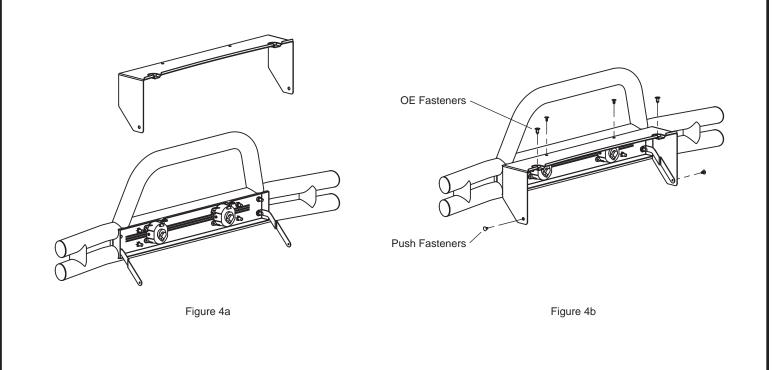

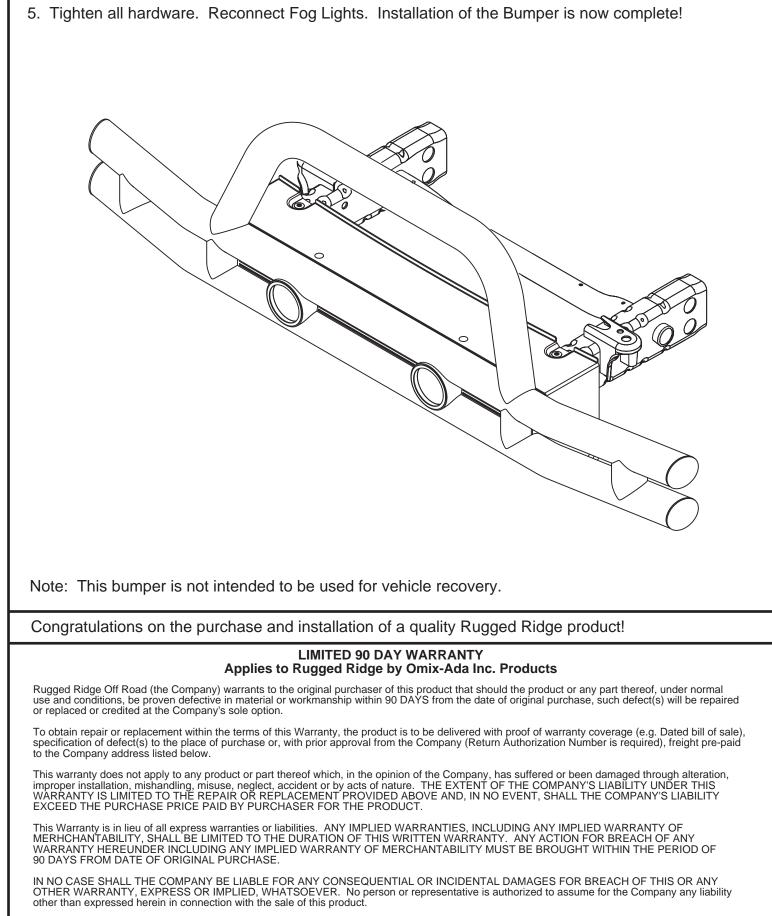

Some States do not allow limitations on how long an implied warranty lasts or the exclusion or limitation of incidental or consequential damage, so the above limitations may not apply to you. This warranty gives you specific legal rights and you may also have other rights, which vary from state to state.