



OMIX-ADA, Inc.

460 HORIZON DR. SUITE 400 | SUWANEE, GA 30024 | PHONE: 770-614-6101 | FAX: 770-614-6069 | info@omix-ada.com


Cowl Guard, Body Armor; JL, JLU & Gladiator

1. Clean all dirt and debris from installation area.


NOTE: Temperature should be between 60°F and 110°F for proper tape adhesion.



2. Using the supplied alcohol wipe, clean area where part will be placed.

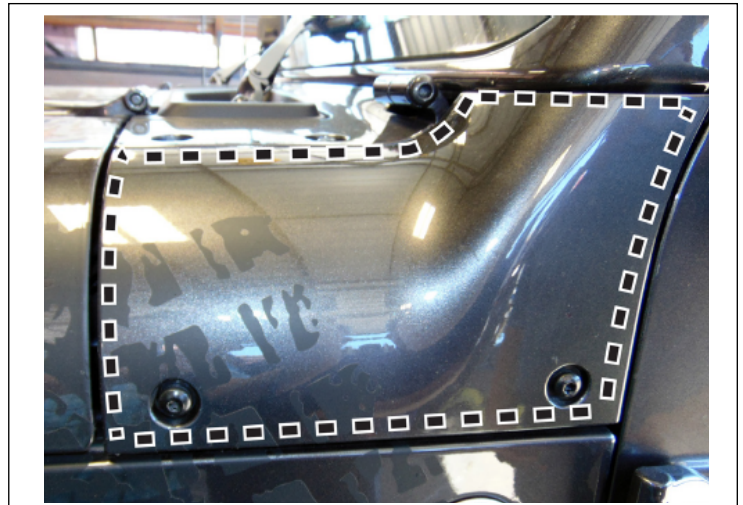


3. Peel back 2" of tape liner from each flange to expose adhesive.

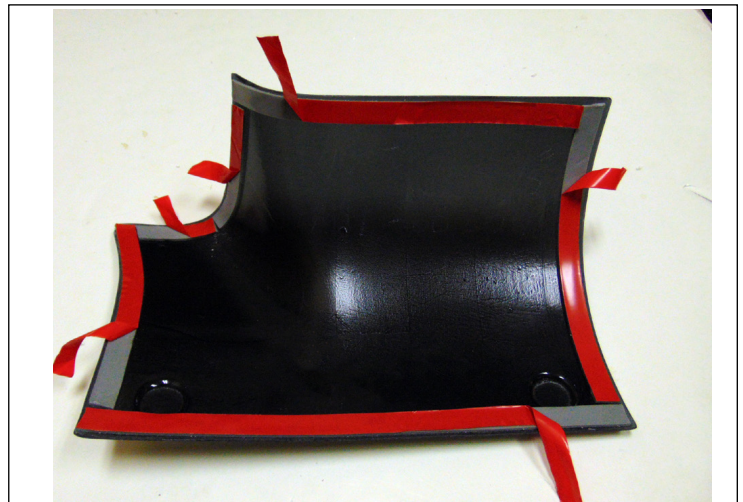


Cowl Guard, Body Armor; JL, JLU & Gladiator

4. Align part on the vehicle and make sure tape tabs are folded out so they are accessible.

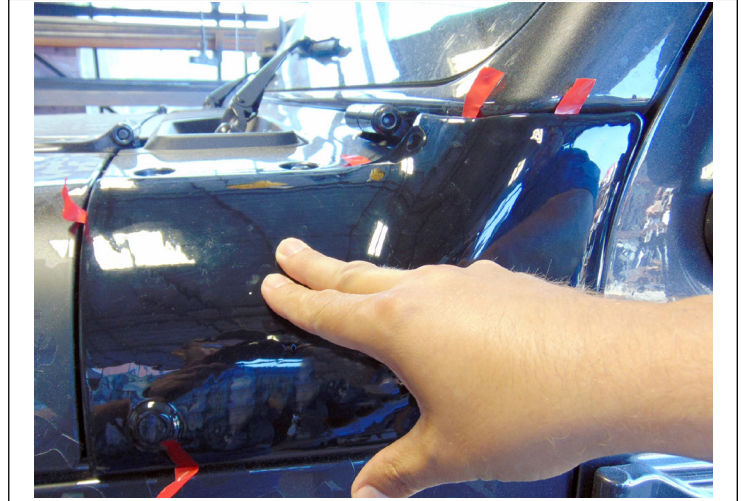

5. Begin by pulling the top tape liner first. Press down on entire length of part applying strong pressure to the taped areas.

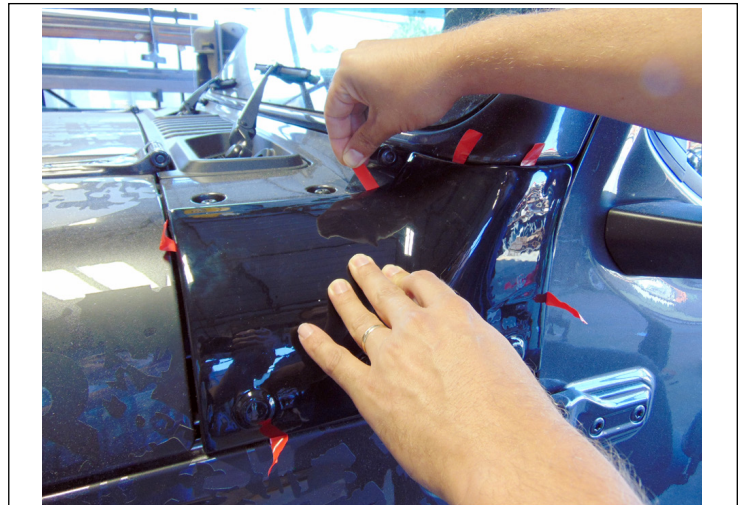

6. Pull liner of lower tape strip. Press down on entire length of part applying strong pressure to the taped areas.





OMIX-ADA, Inc.


460 HORIZON DR. SUITE 400 | SUWANEE, GA 30024 | PHONE: 770-614-6101 | FAX: 770-614-6069 | info@omix-ada.com

Cowl Guard, Body Armor; JL, JLU & Gladiator


7. Pull liner located at the rear toward the door. Press down on entire length of part applying strong pressure to the taped areas.



8. Pull liner located at the front toward the hood. Press down on entire length of part applying strong pressure to the taped areas.

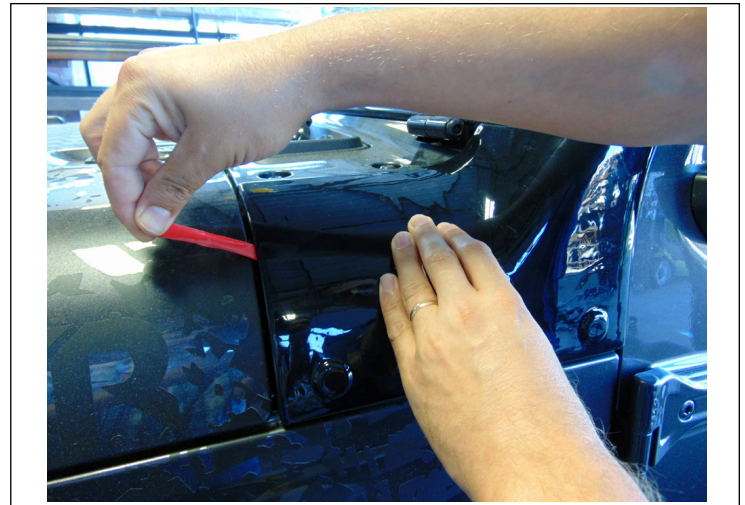

9. Pull liner located at the top corner closest to the center of the windshield. Press down on entire length of part applying strong pressure to the taped areas.

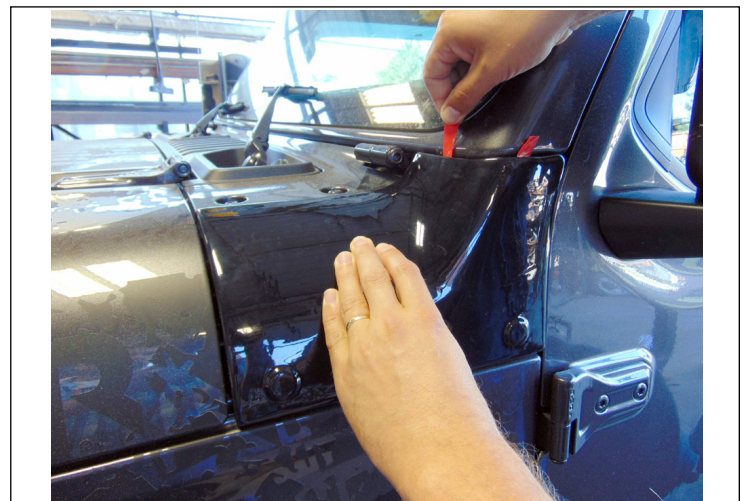



OMIX-ADA, Inc.

Part # 11651.81

460 HORIZON DR. SUITE 400 | SUWANEE, GA 30024 | PHONE: 770-614-6101 | FAX: 770-614-6069 | info@omix-ada.com

Cowl Guard, Body Armor; JL, JLU & Gladiator

10. Pull remaining liner. Press down on entire length of part applying strong pressure to the taped areas.



11. Apply strong pressure for 30 seconds on each section of the part to ensure proper adhesion.

NOTE: The tape reaches maximum adhesive bond after 24 hours of contact.



12. Repeat Steps 1-11 for opposite side. Installation complete.

