

RIGID

INSTALLATION INSTRUCTIONS

2017 FORD® RAPTOR® GRILLE MOUNT



PRODUCT INCLUDES:

(1) Raptor Grille Mount

* LIGHTS SOLD SEPARATELY

***THIS MOUNT FITS THE FOLLOWING LIGHTS:**

(2) 6" SR-Series®

IMPORTANT

THANK YOU FOR PURCHASING RIGID INDUSTRIES' PRODUCTS FOR YOUR VEHICLE.

Please read through all of these Instructions and tips before proceeding with the installation.

We do our best to provide a simple installation process for all applications however a professional installation is always recommended.

**Always disconnect any power sources connected to your vehicle
before servicing fuses or electrical systems.**

STEP 1

Open hood and remove the plastic push pins that attach the plastic radiator shield. Use push pin pliers, non-marring prybar or equivalent.

See Figures 1 & 1.1

FIGURE 1



FIGURE 1.1




STEP 2

Unplug the 3 harness ends and move them out of the way as shown.

See Figure 2

FIGURE 2

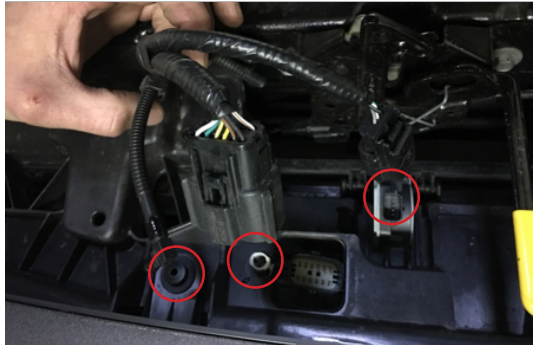

STEP 3

Remove the plastic push pin on each side of the grille.

See Figure 3

FIGURE 3



STEP 4

Remove the (4) 10mm bolts on the top of the grille and set them aside.

See Figure 4

FIGURE 4



STEP 5

Pull headlight trim by pulling straight out from the front of the vehicle using gentle force. **Make sure not to lose any retaining clips when pulling.**

See Figures 5, 5.1, 5.2

FIGURE 5



FIGURE 5.1



FIGURE 5.2




STEP 6

Using a 10mm socket, remove the (1) bolt on each side of the grille on the bottom. Once removed, you can remove the entire grille.

See Figure 6

FIGURE 6

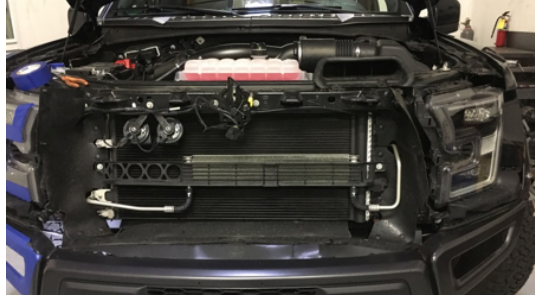

STEP 7

Separate the active shutters from the grille by removing the 10mm bolts. Then slide on the provided hardware as shown. Note the two short u-nuts go on the outer edges. Be careful and remove the wire harness from active shutters.

See Figure 7, 7.1

FIGURE 7


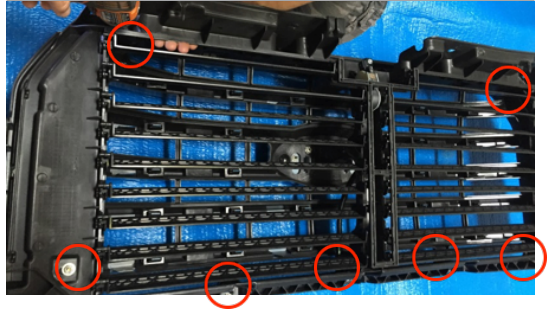


FIGURE 7.1

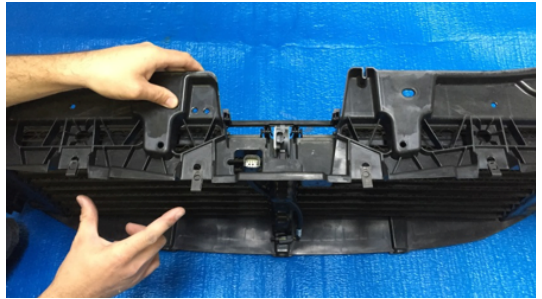

STEP 8

Install the brackets (left and right) using the provided hardware. Then install the RIGID lights.

See Figure 8

FIGURE 8



STEP 9

Once the lights are mounted, install the active shutters back on to the grille and reinstall the factory bolts/nuts. Installation is the reverse of removal.

**Wiring: Wire your lights according to the instructions included with the light.
Take care to avoid any heat sources and sharp or abrasive surfaces.**

**Your installation is now complete.
Welcome to the Rigid Nation!**

WARRANTY INFORMATION

For warranty information, visit www.rigidindustries.com/about/warranty

779 N Colorado St, Gilbert, AZ 85233 • 855-760-5337
www.rigidindustries.com

SR-Series, RIGID and Rigid Industries are registered and/or common law marks owned by JST Performance, LLC,
a Delaware limited liability company d/b/a Rigid Industries.

11-12464-A