

RIGID

INSTALLATION INSTRUCTIONS

2017 FORD® SUPERDUTY® DUAL FOG MOUNT



PRODUCT INCLUDES:

(2) Fog Mount

* LIGHTS SOLD SEPARATELY

***THIS MOUNT FITS THE FOLLOWING LIGHTS:
(4) D-Series®**

IMPORTANT

THANK YOU FOR PURCHASING RIGID INDUSTRIES' PRODUCTS FOR YOUR VEHICLE. Please read through all of these Instructions and tips before proceeding with the installation. We do our best to provide a simple installation process for all applications however a professional installation is always recommended.

**Always disconnect any power sources connected to your vehicle
before servicing fuses or electrical systems.**

STEP 1

Remove the (2) 5mm head bolts from the fender well as well as the (2) plastic clips, then remove the inner fender well.

See Figures 1, 1.1

FIGURE 1



FIGURE 1.1



STEP 2

Remove the bracket by removing the (4) 15mm head bolts, set aside the bracket and bolts to re-install later.

See Figure 2

FIGURE 2



STEP 3

Unplug the harness from the factory fog light.

See Figure 3

FIGURE 3



STEP 4


Using a stubby Phillip screw driver, remove the adjustment screw and spring from the factory fog light.

See Figures 4, 4.1

FIGURE 4



FIGURE 4.1

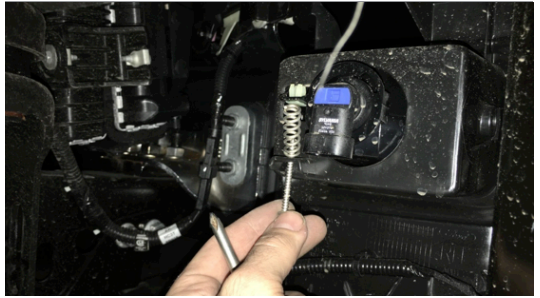

STEP 5

Using a pick or flat head screw driver, lift tab up on each side of the factory fog light and push the fog light out towards the front of the truck to remove.

See Figure 5

FIGURE 5



STEP 6

OPTIONAL STEP - Paint carriage bolt heads black for a clean look.

See Figure 6

FIGURE 6



STEP 7

Install the RIGID D-Series onto the bracket as shown by laying them on a flat surface, while pressing down on the lights and bracket, tighten the nuts from the back side. Once installed, use the provided hardware and install it from the inner fender well. Using a ½" wrench, tighten the nuts as shown below.

See Figures 7, 7.1, 7.2

FIGURE 7



FIGURE 7.1



FIGURE 7.2



STEP 8

Once lights are installed on the bracket, run the harnesses through the bracket as shown.

See Figure 8

FIGURE 8



STEP 9

Once all fasteners are tight, reverse removal process.

See Figure 9

FIGURE 9



Wiring: Wire your lights according to the instructions included with the light. Take care to avoid any heat sources and sharp or abrasive surfaces.

**Your installation is now complete.
Welcome to the Rigid Nation!**

WARRANTY INFORMATION

For warranty information, visit www.rigidindustries.com/about/warranty

779 N Colorado St, Gilbert, AZ 85233 • 855-760-5337
www.rigidindustries.com

D-Series, RIGID and Rigid Industries are registered and/or common law marks owned by JST Performance, LLC, a Delaware limited liability company d/b/a Rigid Industries.

11-12466-A