



Auto Duffle Bag Set Up Guide

The correct attachment of this product is critical and beyond the control of Rightline Gear. The safe use and long life of this product depends entirely on your good judgment and following these directions.

Please reference Strap Fig A, B, and C throughout the Set Up Guide:

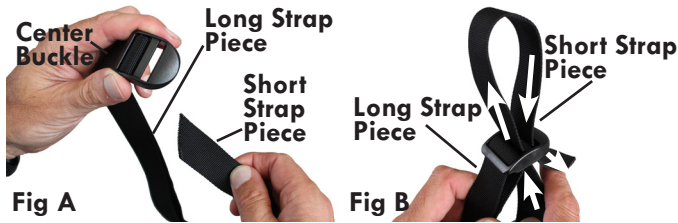


Fig A

Fig B



Fig C

Pack The Auto Duffle Bag

1-Pack the Duffle Bag full, close the zipper, and secure the hook-&-loop-close zipper cover.

2-Place items with sharp or pointed edges in the middle and pack softer items around them.



WARNING: DO NOT ATTACH STRAPS DIRECTLY TO THE D-RINGS; DAMAGE MAY RESULT. THE D-RINGS FUNCTION AS GUIDES FOR THE STRAPS, NOT AS ATTACHMENT POINTS FOR THE STRAPS.

Attach The Auto Duffle Bag(s) - Truck Bed

1-Unthread the short strap piece from the center buckle on the first strap (Fig A).

2-Attach the short strap piece to a corner cleat by threading its end through its loop and pulling tight (Fig 1). Go to the opposite side of the truck bed and secure the long strap piece to the corner cleat by the same method.



Fig 1

3-Run both strap pieces through the side d-ring of the outermost Duffle Bag(s). Run the long strap piece through the top d-ring(s) of the Duffle Bag(s). Make sure the center buckle is facing up and the strap pieces are not twisted. (Fig 2)

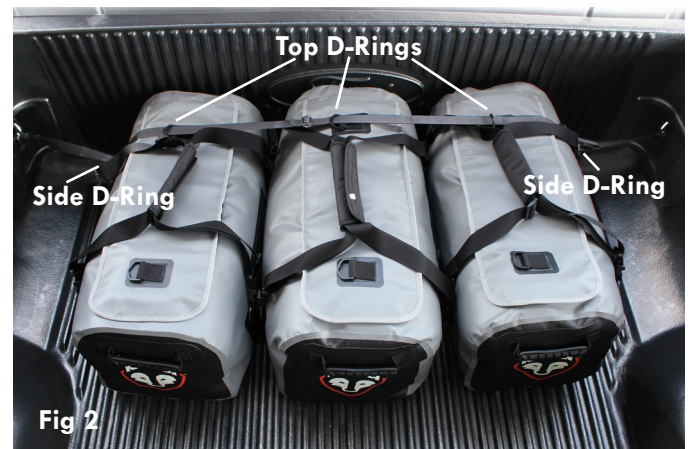


Fig 2

4-Thread the short strap piece back through the center buckle and tighten (Fig B).

Attach The Auto Duffle Bag(s) - Roof

Remove the shoulder straps of the Duffle Bag(s) and place them in the outer pocket(s). Place the Duffle Bag(s) in rows of (1) to (3) on the roof of cars, crossovers, and SUVs, and (1) to (4) on the roof of Jeep Wrangler hard tops, Jk, TJ, YJ, CJ. Each Auto Duffle Bag comes with (2) straps that attach the bag(s) to vehicles WITH or WITHOUT a roof rack.

WITH A Roof Rack

1-Unthread the short strap piece from the center buckle on the first strap (Fig A).

2-Attach the short strap piece to your rack by threading its end through its loop and pulling tight (Fig 3). Go to the opposite side of the vehicle and secure the long strap piece to the rack by the same method.

3-Run both strap pieces through the side d-rings of the outermost Duffle Bag(s). Run the long strap piece through the top d-ring(s) of the Duffle Bag(s). Make sure the center buckle is facing up and the strap pieces are not twisted. (Fig C and Fig 4)




4-Thread the short strap piece back through the center buckle and tighten (Fig B).

5-Repeat steps 1-4 for the second strap.

WITHOUT A Roof Rack - Jeep Wrangler Hard Top

1-Unthread the short strap piece from the center buckle on the first strap (Fig A).

2-Push the short strap piece's loop through the gap over the roll bar (Fig 5 and Fig 6). Attach the short strap piece to the roll bar by threading its end through its loop (Fig 7) and pulling tight (Fig 8).

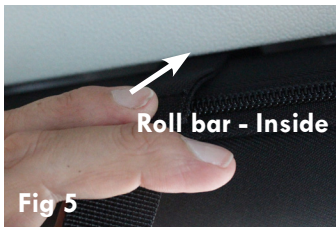

3-Go to the opposite side of the Wrangler and secure the long strap piece to the roll bar by the same method.

4-Run both strap pieces through the side d-rings of the outermost Duffle Bag(s). Run the long strap piece through the top d-ring(s) of the Duffle Bag(s). Make sure the center buckle is facing up and the strap pieces are not twisted. (Fig C and Fig 9)



5-Thread the short strap piece back through the center buckle and tighten (Fig B).

6-Repeat steps 1-5 for the second strap.

7-Shut the vehicle's doors over the straps.

WITHOUT A Roof Rack - Through The Vehicle

1-Unthread the short strap piece from the center buckle on the first strap (Fig A).

2-Connect the loop-ends of the strap pieces together (Fig 10).

3-Run the strap through the vehicle, through the side d-rings of the outermost Duffle Bag(s), and over the top of the carrier through the top d-rings. Make sure the center buckle is facing up and the strap is not twisted. (Fig C and Fig 11)



Fig 10

4-Thread the strap's end through its buckle and tighten (Fig B).

5-Repeat steps 1-4 for the second strap.

WITHOUT A Roof Rack - Car Clips

1-Add the Rightline Gear Car Clips (sold separately) to the (2) included straps.

2-Unthread the short strap piece from the center buckle on the first strap (Fig A).

3-Run both strap pieces through the side d-rings of the outermost Duffle Bag(s). Run the long strap piece through the top d-ring(s) of the Duffle Bag(s). Make sure the center buckle is facing up and the strap pieces are not twisted. (Fig C and Fig 12)



4-Thread the short strap piece back through the center buckle and tighten (Fig B).

5-Attach the Car Clips under the door frame weather molding and tighten the strap (Fig 13). Make sure the strap has enough tension to keep the top of the Clips straight up and down (not angling out from the door frame).

6-Repeat steps 1-5 for the second strap.

7-Shut the vehicle's doors over the clips/straps (Fig 14).



Fig 13


Fig 14

Attach The Auto Duffle Bag(s) - Cargo Basket

1-Unthread the short strap piece from the center buckle on the first strap (Fig A).

2-Attach the short strap piece to the cargo basket by threading its end through its loop and pulling tight (Fig 15). Go to the opposite side of the vehicle and secure the long strap piece to the cargo basket by the same method.

3-Run both strap pieces through the side d-rings of the outermost Duffle Bag(s). Run the long strap piece through the top d-ring(s) of the Duffle Bag(s). Make sure the center buckle is facing up and the strap pieces are not twisted. (Fig C and Fig 16)

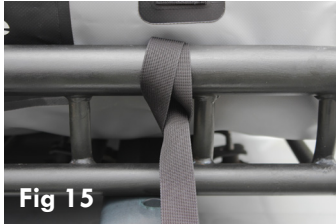

4-Thread the short strap piece back through the center buckle and tighten (Fig B).

5-Repeat steps 1-4 for the second strap.

Attach The Auto Duffle Bag(s) - Hitch Rack

1-Unthread the short strap piece from the center buckle on the first strap (Fig A).

2-Attach the short strap piece to the front side of the hitch rack by threading its end through its loop and pulling tight (Fig 17). Secure the long strap piece to the back side of the hitch rack by the same method.

3-Run both strap pieces through the side d-rings of the Duffle Bag. Run the long strap piece through the top d-ring of the Duffle Bag. Make sure the center buckle is facing up and the strap pieces are not twisted. (Fig C and Fig 18)




4-Thread the short strap piece back through the center buckle and tighten (Fig B).

5-Repeat steps 1-4 for the second strap of the Duffle Bag and for both straps if a second Duffle Bag is used.

Final Strap Adjustments

1- Move each strap's tri-glide to the end of the loose strap (Fig 19).

2-Tie off any excess strap on the other side of the center buckle (Fig 20). If the straps are too long, cut off the extra length and melt the cut end to prevent fraying.

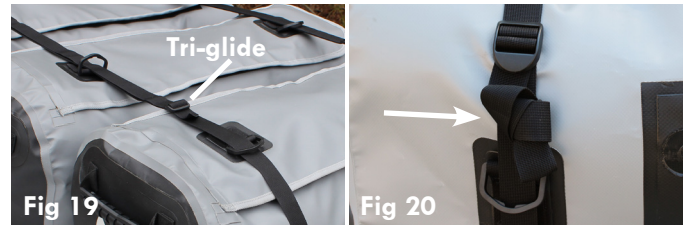

3-Check the straps before driving and regularly throughout the trip.

www.rightlinegear.com

LIMITED WARRANTY

Rightline Gear warrants that for one (1) year, from the date of purchase that all products will be free of material defect and Rightline Gear will repair or replace any defective or damaged product free of charge if it is returned in original condition by the consumer to Rightline Gear or the place of purchase. Claims of defective material and/or workmanship must be made in a timely manner. Safe and maintenance-free use of this product depends upon the consumer's or user's proper installation of the product and good judgment in its use. Rightline Gear is not responsible for the consumer's or user's use or misuse of this product. Damage to Purchaser's vehicle or any other vehicle caused by Purchaser's improper use of this product may cause serious injury or death. The Purchaser acknowledges that Rightline Gear has no control over the attachment of its products to vehicles or the attachment of items to the Rightline Gear products. Accordingly, Rightline Gear cannot assume responsibility for any damage to any property arising out of the improper attachment or use of its products.

RIGHTLINE GEAR SPECIFICALLY DISCLAIMS ANY AND ALL OTHER WARRANTIES WHETHER EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO WARRANTY OF MERCHANTABILITY AND WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE. RIGHTLINE GEAR FURTHER DISCLAIMS ANY WARRANTY OR OTHER PROMISE THAT GIVES RISE TO ANY SORT OF CONSEQUENTIAL, EXTRAORDINARY, PUNITIVE, EXEMPLARY, SUBSEQUENT, OR NONECONOMIC DAMAGES OR ATTORNEY FEES. THE CONSUMER OR USER'S SOLE REMEDY AGAINST RIGHTLINE GEAR FOR ANY DEFECT IN THIS PRODUCT IS LIMITED TO FULL RETURN OF THE PURCHASE PRICE.

RIGHTLINE GEAR SPECIFICALLY ENCOURAGES COMPLIANCE WITH ALL MOTOR VEHICLE LAWS, AND EXPRESSLY DISCLAIMS ANY AND ALL LIABILITY FOR FAILURE TO COMPLY WITH SAME.