## **Installation Instructions**



### **Wind Breaker**

## For front seat installation

**Top straps** 


Begin installation by laying out the Wind Breaker and orienting it so the wide side is the top.

- 1) Locate the upper straps, run the long side straps between the door surrounds (if installed) and the roll bar then up to the hole on the top of the main roll bar hoop as shown.
- 2) Loop the shorter straps around the main hoop and fasten with the buckle.





Lower straps

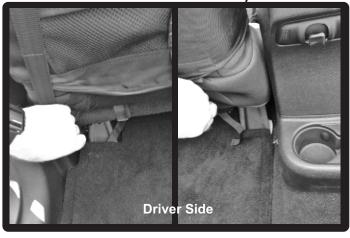

- 3) Hook the lower straps to the sides of the sheet metal seat mounts as shown here. The driver side is shown to the left. Be sure to hook the outside left strap to the outside of the seat mount to help pull the Wind Breaker across the vehicle. The inner strap goes to the inner side of the right hand sheet metal mount.
- 4) Repeat opposite operation for other side. Now tighten all straps.


#### For rear seat installation

1) Loosen the top side straps as far as possible but keep the hooks on the ends. Wrap the strap around outside of the roll bar and back to the center. Hook the to hooks together and tighten them across the roll bar. Be sure to center the Wind Breaker at this time.

2)Now wrap the shorter straps around the roll bar and tighten as shown here to the right.





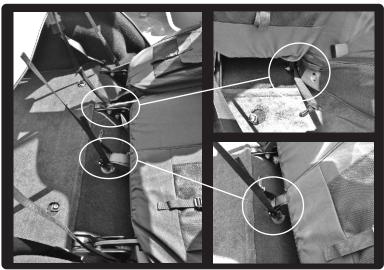

3) Attach the lower straps to the rear seat mounts and the seat belt locations as shown here to the left. Note that the hooks are not used at the locations shown, they are moved up the strap out of the way and the velcro is wrapped around the installation points. It is a good idea to leave the hooks on the strap so they will not be lost.

The plastic hooks should be attached to the outside of the seat mounts on both sides.

4) now tighten all the straps so that the Wind Beaker is tight all around.

# **Important Care Instructions:**

Convertible tops and accessories require special care if you want to get the maximum usage and enjoyment from them. The following recommendations, if followed carefully, can extend the life of your top or accessory.

Hand wash using a mild non-detergent soap such as ivory. Use a non-abrasive cloth or sponge. Rinse thoroughly. Do not wash in direct sunlight and avoid automatic car washes

When your top is clean, we recommend using "Ragg Topp" or "303 Protectant" on both the vinyl top and windows. This product contains a sunscreen that helps protect from the sun's damaging rays. Stay away from products containing alcohol, as it will cause the fabric and windows to lose their elasticity, thus reducing the life of your top or accessory. If you are unable to locate "RaggTopp" Please call 1-800-377-4700 for a distributor near you. For "303 Protectant", please call 1-800-223-4303 for a distributor near you.

Direct sunlight and heat are the biggest enemies of the windows. Park in the shade whenever possible. If you must park in the sunlight, rotate the direction that you park every few days so all windows get even exposure. Our tops are designed so that you may roll up and/or store the rear curtain and side curtains. To prevent scratching of the windows, be sure that windows are completely clean and free of dust particles. Even a little dirt will badly scratch

the windows, be sure that windows are completely clean and free of dust particles. Even a little dirt will badly scratch the windows. You may want to use a soft cloth when rolling up or storing your windows. Heat may build up on rolled up windows, so be sure to unroll them frequently. If you roll up the windows at the beginning of summer and leave them, they may be ruined by fall.

Do not open or roll up windows at temperatures below 45 degrees F this could cause them to crack or break.

# **Warranty Information**

Rampage products, Inc. warrants to the original purchaser of any top it manufactures, that the top will be free of defects in material or workmanship for a period of 1 year from date of purchase. Such obligations under this warranty shall be limited to the repair or replacement, at Rampage products discretion, of any assembly or parts which, upon examination by Rampage products, Inc. proves to be defective. All defective items must be returned with proof of purchase to Rampage products, Inc., freight prepaid. This warranty does not cover damage resulting from abuse, misuse, alteration, accident or damage in transit. Rampage products obligations under this warranty are limited to the aforementioned repair or replacement of warranty defects for which the return authorization has been received during the warranty period, and Rampage products, Inc. shall not be liable for any incidental or consequential damages arising from breech of this or any implied warranty.

Rampage Products, Buford, GA Phone: 800-328-2409 www.rampageproducts.com