

TOYOTA TUNDRA DOUBLECAB RAIL CAP INSTRUCTION

STEP ONE: *PROCEED CAREFULLY!*

Remove the plastic bed rail caps, starting at the tailgate and lifting slowly as shown in Diagram 1. Allow each snap to release as you proceed, being careful not to over-stress the rail cap.



DIAGRAM 1

STEP TWO:

Place the correct stick-on shim pads at the locations shown in Diagrams 2 and 3. Be sure to center the shim at the location indicated.

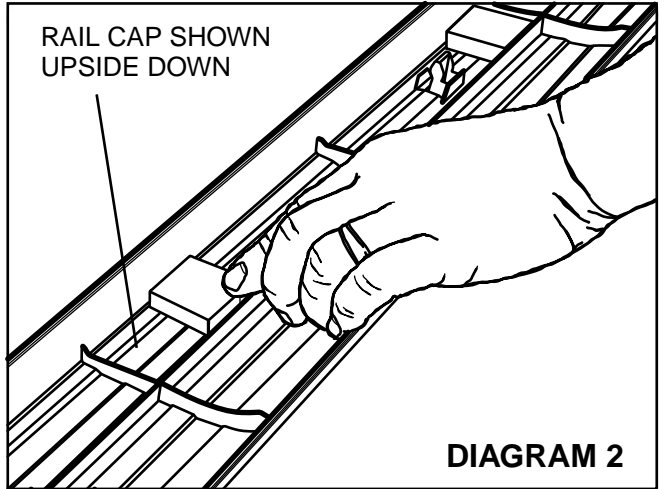


DIAGRAM 2

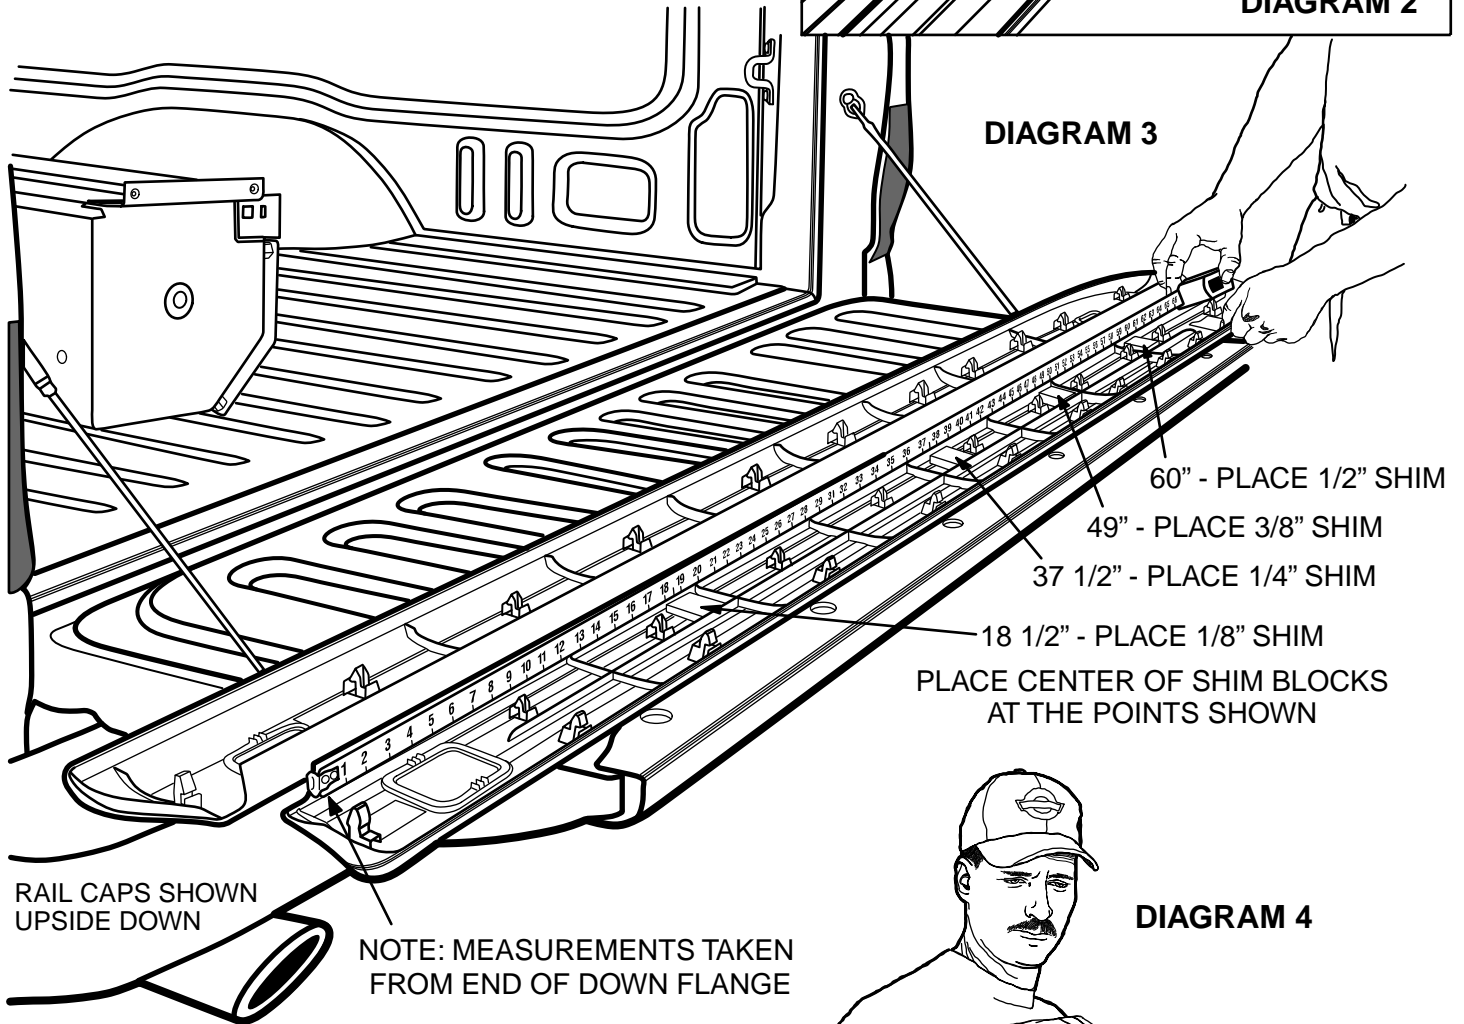


DIAGRAM 3

DIAGRAM 4

STEP THREE:

With the shims in place, snap the rail caps back into place, starting at the bulkhead and working toward the tailgate.

STEP FOUR:

Proceed with installation of ROLL-N-LOCK using the Standard Installation Guide.

