



WWW.SMITYBILT.COM

Installation Instructions Cab Cover Install

NOTE: Carefully read entire instructions thoroughly before attempting to install this part. Photos are for illustration purposes and actual product may vary. Install remains the same

Cover material will stretch upon installation and will fit better once fabric is warmed up and stretched. It is best to lay cover out in the sun before the initial install. We recommend install in temperatures above 75°F.



For Technical Support/Warranty Information please call 310-762-9944
Smittybilt, 400 W. Artesia Blvd Compton, CA 90220



WWW.SMITYBILT.COM

Installation Instructions Cab Cover Install

Step 1: Fold mirrors in. Locate the front of the cover and drape the cover over the vehicle. It is helpful to position the windshield wipers away from the windshield. Fig A

Fig A



Step 2: Locate the side straps and attach below the door. Tighten straps slightly to keep them hooked on the vehicle. Once all straps are in place, tighten down evenly to secure the cover to the vehicle. Some nerf bars may prohibit the strap to be attached to the pinch weld. You may loop strap around body mount bolt and then attach to body mount cup or other location on the body tub. Fig B+C. Pull straps snug, but Do not over tighten straps, damage to cover and/or vehicle may occur.

Fig B


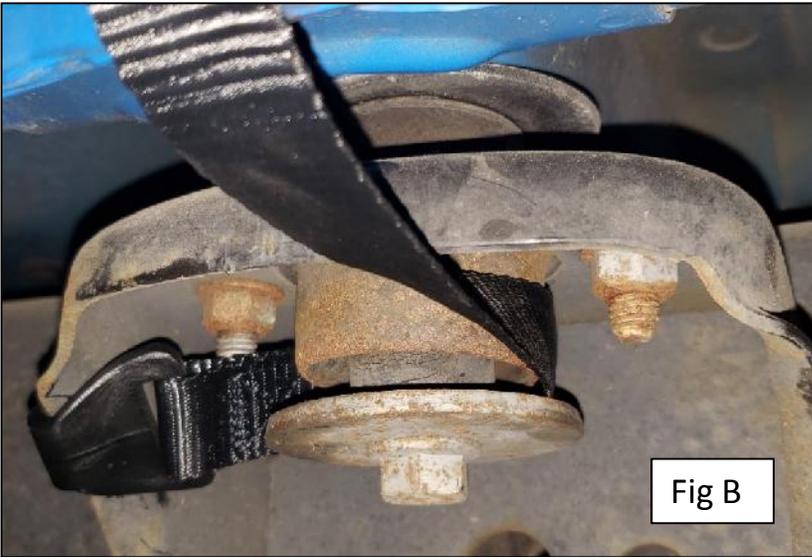


Fig C



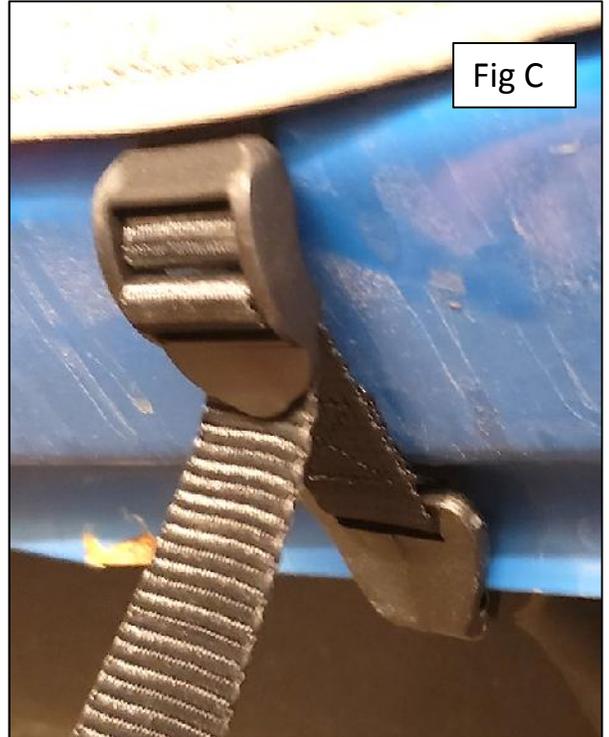

WWW.SMITTYBILT.COM

Installation Instructions Cab Cover Install

Step 3: Secure cab cover to belt rail. The rear corners have a plastic strip that will secure into the belt rail along the side and rear of the body tub. Fig D+E.

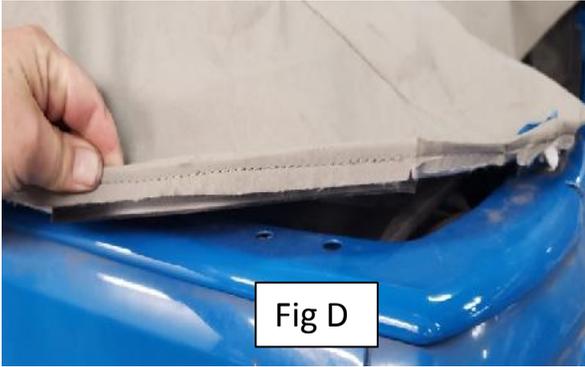


Fig D

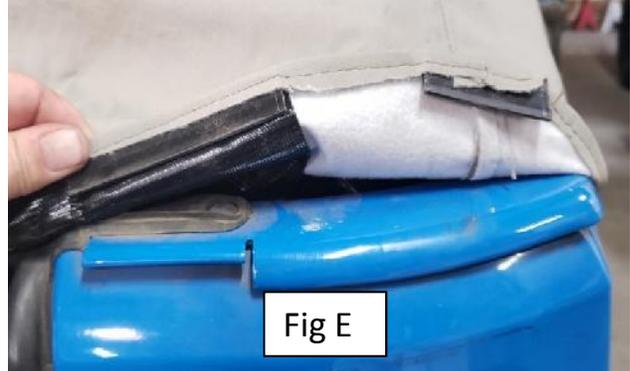


Fig E

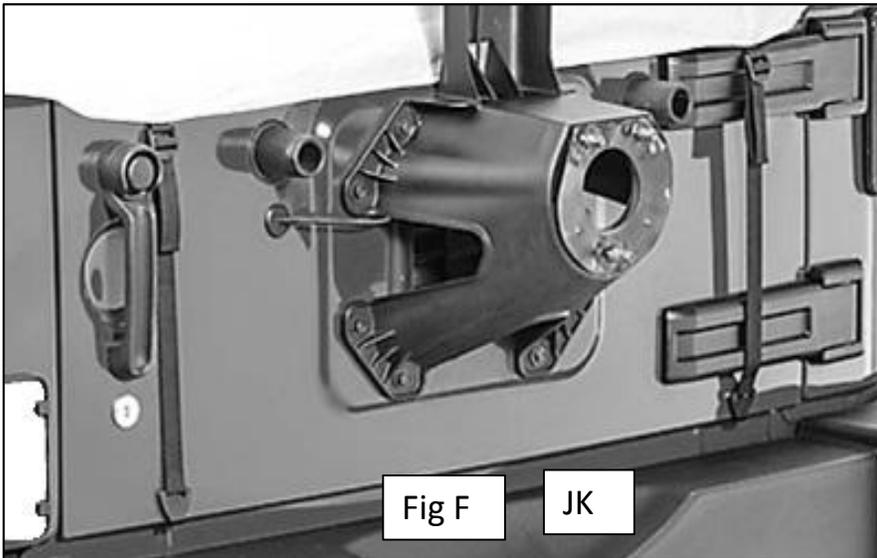


Fig F

JK

Step 4:

JK Secure rear cab cover straps to the bottom edge of the tailgate. Tighten straps evenly. Fig F. Pull straps snug, but Do not over tighten straps, damage to cover and/or vehicle may occur.

TJ/YJ The two side straps will slide over the tail light housings. The large center strap will go around spare tire/spare tire mount. Fig G . Pull straps snug, but Do not over tighten straps, damage to cover and/or vehicle may occur.



Fig 1



Fig 2



JL- Secure the rear corner straps to the bottom of the body and or accessory in the same proximity. Note: you may need to slide strap behind the bumper starting at the end of the bumper. (Fig 1,2)



WWW.SMITYBILT.COM

Installation Instructions

Cab Cover Install



Center strap can go around the tire as shown or it can go around the tire carrier.

Step 5: Lower windshield wipers back into their normal position. Fig H





WWW.SMITYBILT.COM

Installation Instructions
Cab Cover Install






WWW.SMITTYBILT.COM

Installation Instructions Cab Cover Install

Optional: Cab covers are equipped with a grommet hole. This can be used with a variety of cable and locks to help prevent theft of the cab cover. Most will pass small end through cab cover, then through the loop on the opposite end. Then across undercarriage of vehicle and secure by passing small end through grommet and securing with pad lock.

Short style cables will pass small end through cab cover, then through the loop on the opposite end, then around a body mount and secure with a lock onto the large loop. Once secured, it is best to position lock under the vehicle so it does not damage the paint.

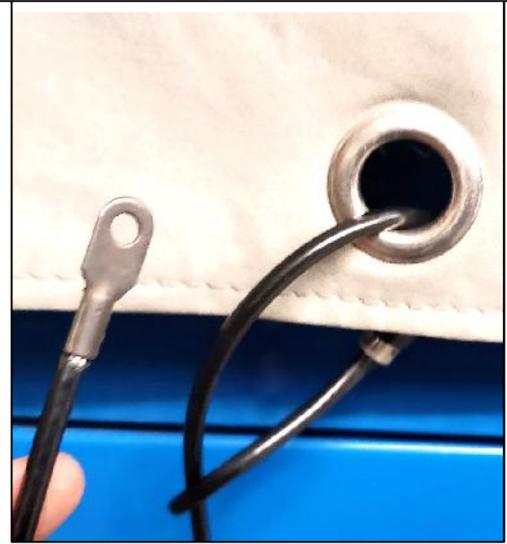

Short cable only hooks to one side of vehicle around body mount. Lock junction placed away from painted body to avoid damage.



WWW.SMITYBILT.COM

Installation Instructions Cab Cover Install

Cab cover is designed to protect your interior from sun damage and light rain. This product is not completely water proof and some seam leakage may occur during prolonged exposure to snow and water.

Maintenance

- Cover needs to be washed regularly using warm water and a mild soap. Brush with soft bristle brush. Rinse well with cool water and ensure no soap residue is left. Air dry. DO NOT put in dryer or use heat to dry fabric.
- If seeping occurs through the seams, liquid seam sealer may be applied or Scotchguard on the inside of the seams.
- Tears in fabric can be patched using Bondex or similar iron on patches on the inside of the cover. Follow patch manufactures instructions for install.



WWW.SMITYBILT.COM

Installation Instructions Cab Cover Install

Limited Warranties

Smittybilt's products are covered under the following limited 1 year warranties only. Note that the duration of the limited warranty differs according to the material and finish of the product purchased. Subject to the 1 year duration and conditions of the limited warranty stated below, Smittybilt warrants to the original retail purchaser that its products are free from defects in material and workmanship. All other warranties and representations express or implied, are hereby disclaimed, including fitness for merchantability and buyer's intended use or purpose. All parts are sold "AS IS" except for the limited warranties granted herein. Buyer assumes all risks as to the selection, suitability and performance of all goods and products selected. This limited warranty does not cover damage or impairment in any part due to misuse, improper installation, accident or contact with on-road or off-road hazards, product modification, improper or inadequate cleaning and/or maintenance. Smittybilt is not responsible for items damaged during shipping. This warranty is not transferable from the original buyer. For the original Buyer to be eligible for the limited warranty coverage, the Buyer must provide proof of purchase. Smittybilt strongly recommends returning the warranty registration card.

Customer's remedy hereunder shall be limited only to repair or replacement (at Smittybilt's option) of any defective part(s) returned to Smittybilt at customer's expense. The determination of whether or not a returned part is defective or subject to coverage under the limited warranties stated herein shall be made at Smittybilt's sole discretion.

To assure product quality, Smittybilt reserves the right to change product design, material, specification and finishes without prior notice to customers. This limited warranty gives you specific legal rights and you may also have other rights, which may vary from state to state. Some states do not allow limitations on how long an implied warranty lasts, so the above limitations may not apply as to you. Also, some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitations or exclusions may not apply to you. Smittybilt reserves the right to discontinue product lines and substitute products, or provide other remedies than those listed in this limited warranty for those discontinued products.

Warning

Rollover and other types of vehicle accidents may result in serious injury or death to you, your passengers and others sharing the road. Smittybilt accessories are decorative and are not intended to reduce or avoid injury or damage in the event of an accident. The weight and location of Smittybilt accessories may affect your vehicles' handling, stability and performance, creating an increased risk of accident or rollover. Before installing any accessory, check state laws and assure that the accessory will not obscure any lights or interfere with proper operation on your vehicle's safety equipment. Consult your owner's manual and the Smittybilt instructions, or additional safety information. Smittybilt products, nor the warnings contained herein, are not a substitute for your safe driving. Don't drink and drive, always use seat belts and don't drive faster than conditions permit.