


1. Open hood.
2. Install (2) brackets on hood shield flange using (2) machine screws and (2) black plastic washers.
3. Remove (4) plastic seal retaining fasteners that align with the pre-drilled holes in the hood shield. Next, carefully separate the hood seal / gasket from the areas of the hood that align with the hood shield flange. **NOTE: Exercise extreme caution not to tear or damage the hood seal / gasket when separating from hood.**
4. Reposition the hood shield with the tabs sliding between the hood and rubber seal and align with holes.
5. Separate Fastener Assembly in two pieces. Gently pull back hood seal / gasket and place the female portion of fastener through hood shield and into hood. Replace hood seal / gasket. Install male portion of fastener as illustrated. Repeat for remaining (3) fasteners. **DO NOT OVER TIGHTEN**
6. Tighten all (4) fasteners until snug to secure hood shield to hood.
7. Note the location where the brackets will align with hood edge and mark with a grease pencil.
8. Center a piece of protective film over each grease pencil mark, and wrap around the hood edge.
9. Slide each end bracket over hood edge, ensuring that each is centered on the protective film previously installed.
10. Turn both of the hood bumpers counter clockwise 1 1/2 turns.
11. Close Hood.
12. Apply (4) bump ons to surface of hood.

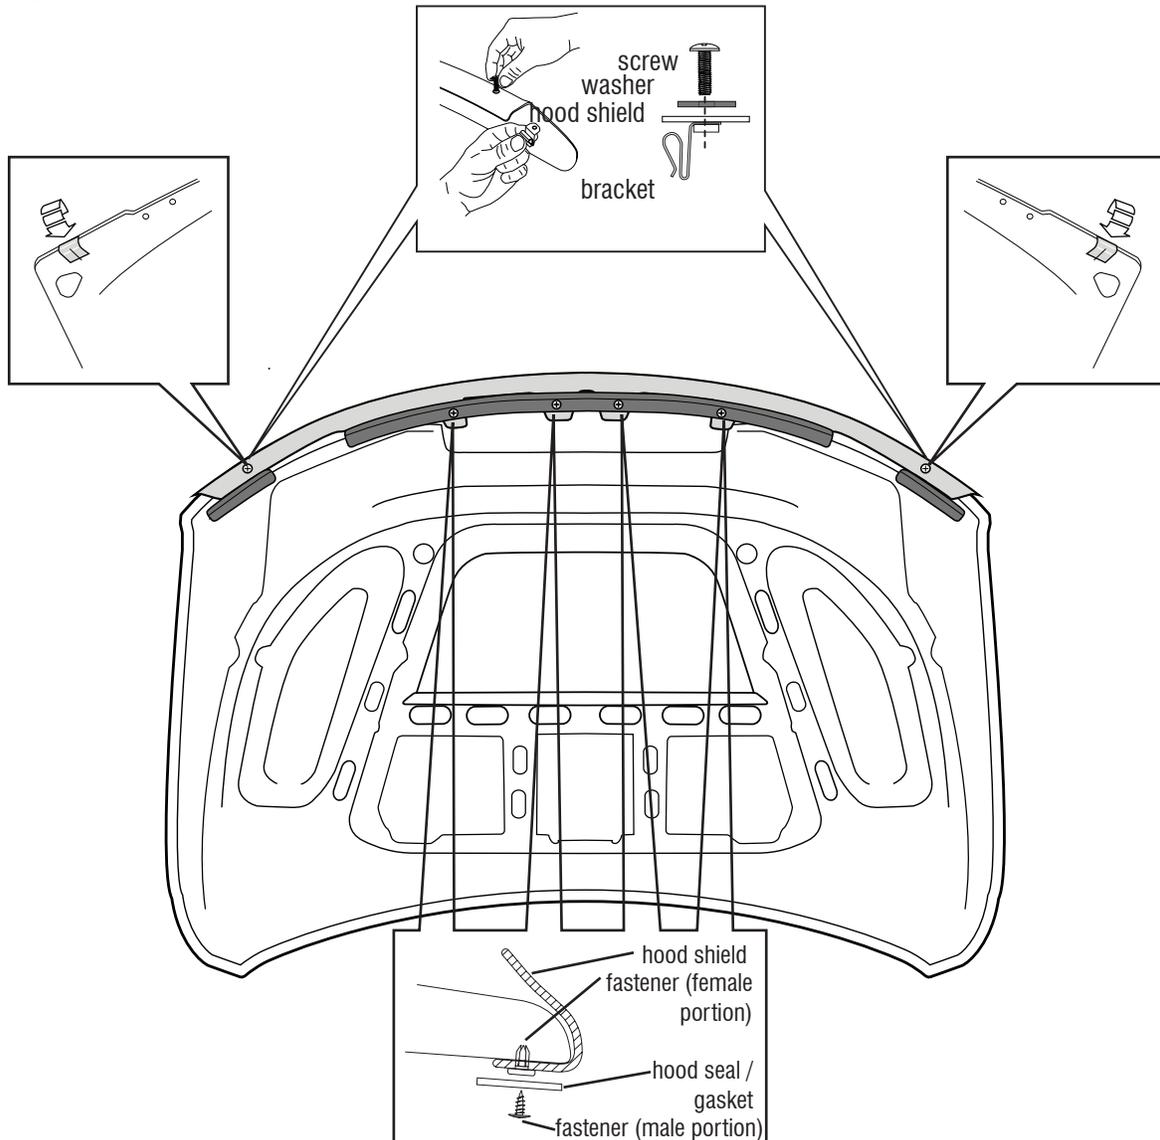

**IMPORTANT:** Before driving, ensure the hood shield is properly secured to vehicle. Clean with a **SOFT** cloth and soap and water **ONLY!** Using abrasive cleaners, chemicals, or solvents will **VOID** the warranty on this product.