




INSTALLATION INSTRUCTIONS


#189 Flip-Up License Plate Holder

Please read and fill out the enclosed warranty registration card to activate your warranty.

Parts Checklist

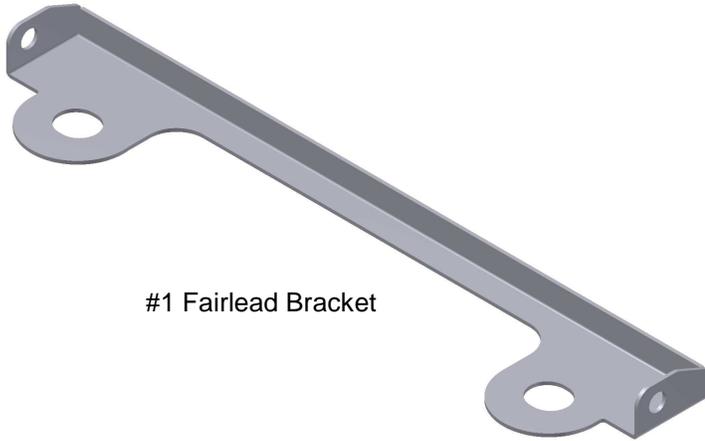

#1 Fairlead Bracket

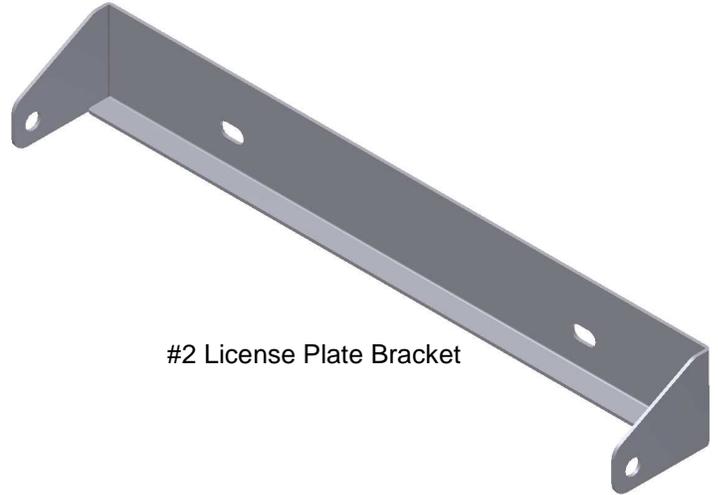

#2 License Plate Bracket


#189 Shipping Package



#3.2 (4) 1/4" x 3/4"
Screws



#3.3 (4) 1/4"
Steel Washers



#3.4 (4) 1/4"
Nylock Nuts



#3.1 (2) 1/4"
Nylon Washers

Tools required

- Snap Ring Pliers
- #2 Phillips Screwdriver
- 7/16" wrench

ATTENTION:

- ***THIS FLIP-UP LICENSE PLATE HOLDER WAS DESIGNED TO WORK WITH STANDARD (8 3/4" CENTER TO CENTER AND 5/8" OD) ROLLER-STYLE WINCH FAIRLEADS.***

Assembly/Mounting Directions

1. Assemble the #333 Flip-Up License Plate Holder, as shown in Figure 1 (Reverse Side). The #2 License Plate Bracket fits over the #1 Fairlead Bracket. Slip the #3.1 Nylon Washers between the #1 and #2 Brackets during assembly.
2. Tighten the screws so that the desired friction between the #1 and #2 Brackets is achieved. Further adjustment may be made after final assembly, if necessary.
3. Using appropriate snap ring pliers, remove the (2) #4.2 external snap rings at the top of your roller fairlead (not included). Install the #1 Flip-Up License Plate Holder onto the roller fairlead vertical pins as illustrated. Re-Install the (2) #4.2 snap rings. (Figure 2)
4. Install your license plate onto the #1 Flip-Up License Plate Holder and fasten with the supplied #3.2 screws, #3.3 washers, and #3.4 nuts. (Figure 2)

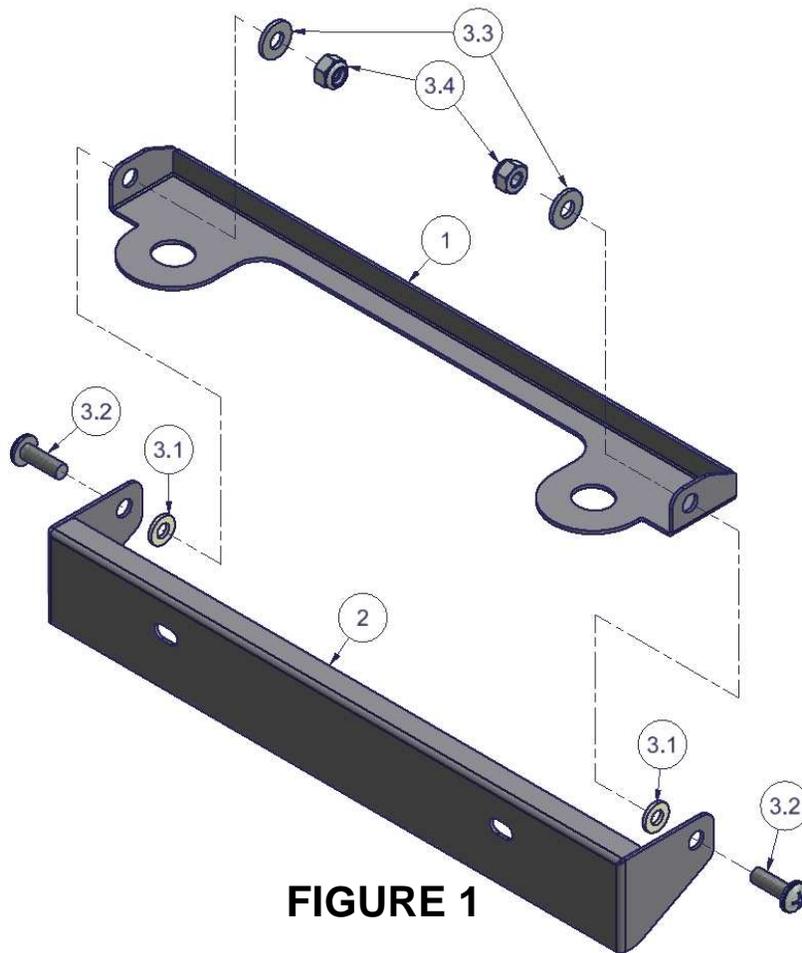


FIGURE 1

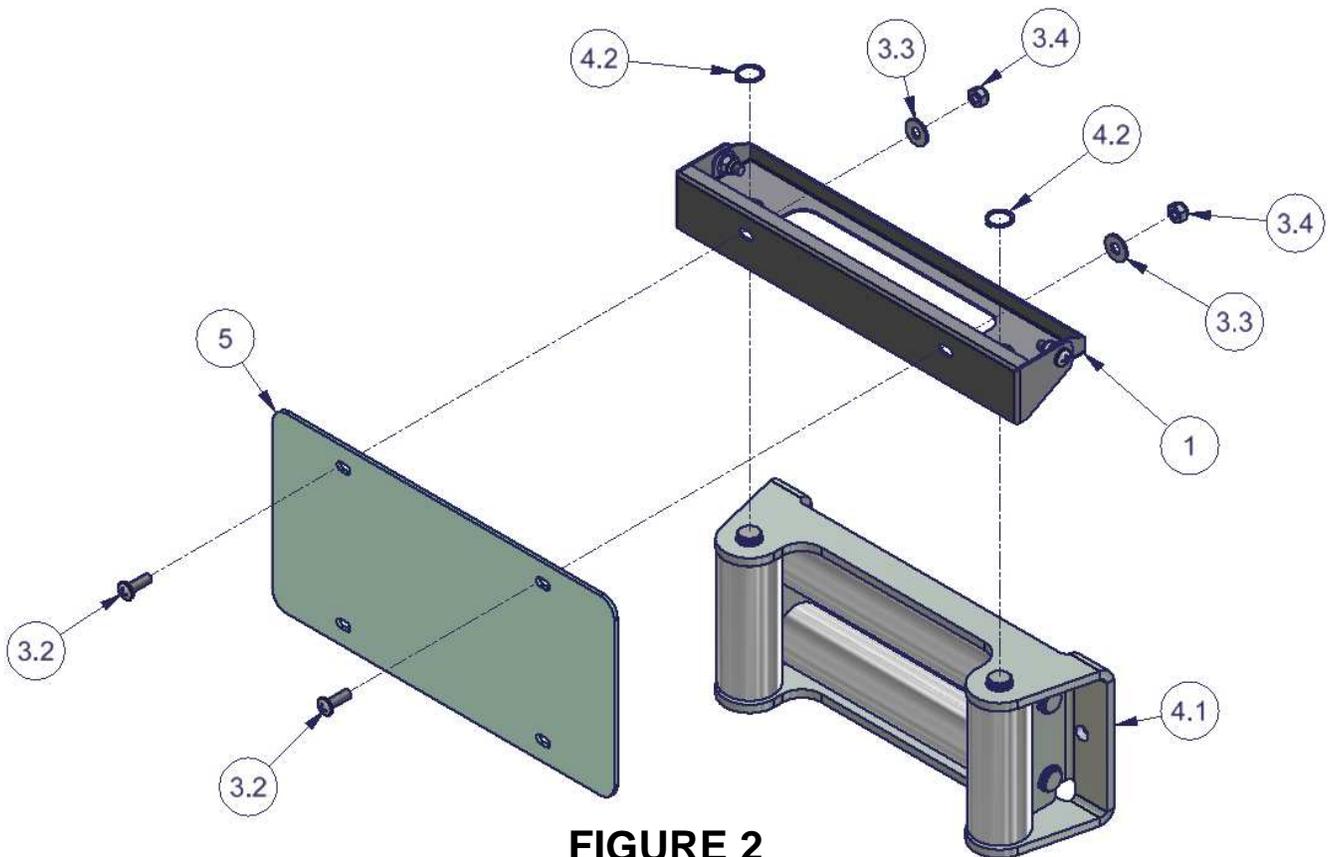


FIGURE 2