



INSTALLATION INSTRUCTIONS


Console Safe #427-01

2022+ Toyota RAV4 Console Safe w/Keyed Lock

See tuffyprompts.com for Fitment Guide


Please read and fill out the enclosed warranty registration card or register online at <https://tuffyprompts.com/help/warranty-information/warranty-registration/> to activate your warranty.

PARTS CHECKLIST

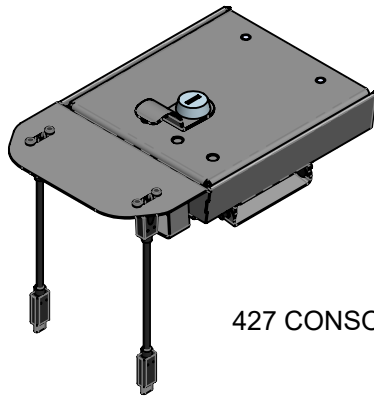

427 CONSOLE SAFE

SHIPPING PACKAGE CHECKLIST

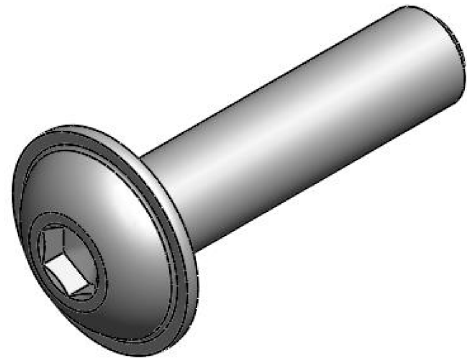

#1 M6 x 1.0 x 25mm (4)
Flanged Button Head Screw

TOOLS CHECKLIST

- 10mm Socket, 11/32" Socket
- 6mm Allen Wrench

PLEASE READ ALL INSTRUCTIONS THOROUGHLY BEFORE STARTING INSTALLATION.

1. Remove all contents from the shipping box and confirm that you have all the components listed above.
2. Using a 10mm socket remove the (4) OEM screws from the floor of the console.
3. Partially unfold the legs and lower into your 427 Console Safe with the back end first Into the console.
4. Open the lid and open the legs completely.

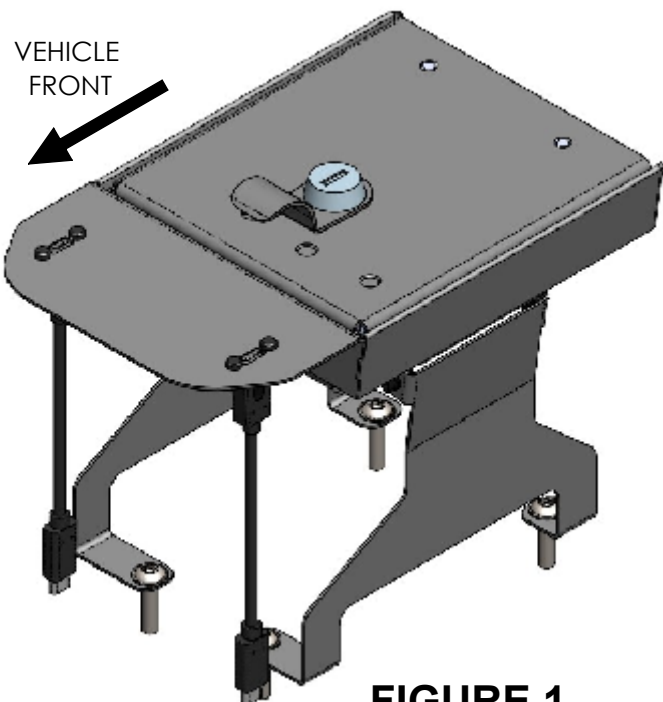


FIGURE 1

5. Take each end of the USB-C extenders and plug them into the power ports at the front of the console.
6. Insert the (4) #1 M6 Flange Head Screws into the holes in the floor of the console and tighten them down so the feet are flat with the floor of the console.

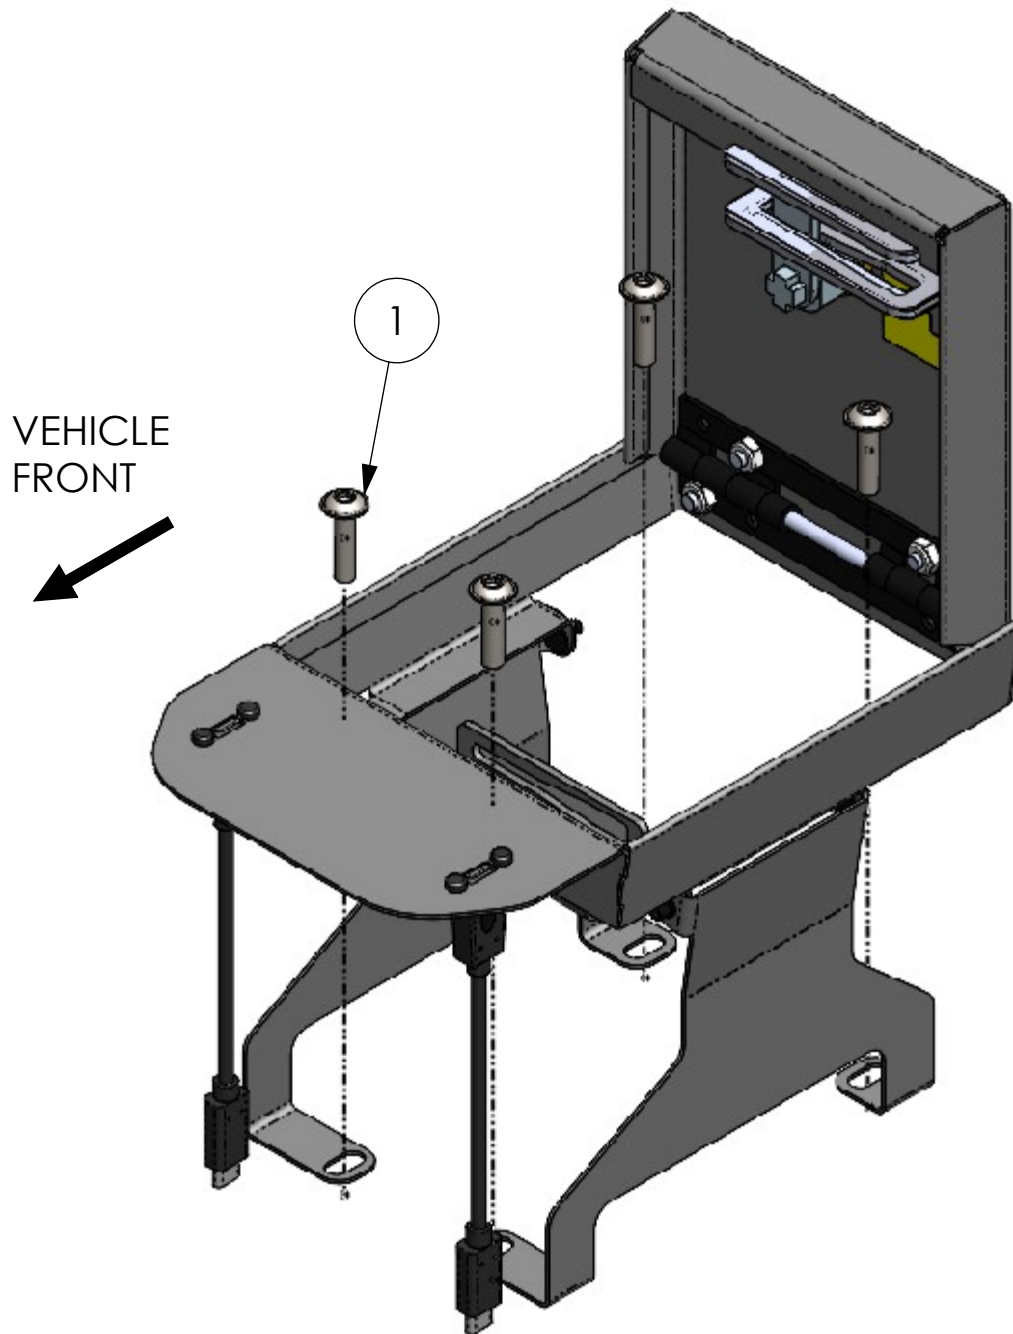


FIGURE 2

7. You have successfully installed your console safe.