

INSTALLATION INSTRUCTIONS

1987-06 Jeep Wrangler

Trailblazer Front Winch Mount Bumper

PART NUMBER

42-2005

REQUIRED TOOLS


- Rachet
- Torque Wrench

PARTS	
QTY	PRODUCT
1	Front Bumper





FIGURE 1
Installed Trailblazer Front Bumper
Tow accessories sold separately

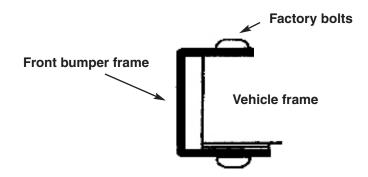

INSTRUCTIONS:

- 1. Remove factory bumper (If applicable) by removing the two top and two bottom bolts.
- NOTE: Save hardware for later use.
- 2. Carefully place Trailblazer bumper on factory frame. Align the holes in the bumpers mounting plate with the holes in the frame. Mount using the factory hardware you removed in Step 1 to 55 ft/lb.

NOTE: To protect your investment, wax this product after installing. Regular waxing is recommended. Do not use any type of polish/wax that contains abrasives that could damage the finish.

CUSTOMER SERVICE PH: 800-345-8476

TECHNICAL PH: 800 793-7846

www.westinautomotive.com